

**3M** Science.  
Applied to Life.™


3M™ Dyneon™ Peroxide Cure Perfluoroelastomer PFE 40Z

# Tough seals. Made easy.

**A new, easy to process  
peroxide cure perfluoroelastomer  
for downhole and chemical  
processing applications**

Whether it's 1000 feet down a borehole or a refinery pipeline carrying harsh chemicals, extreme environments require extraordinary sealing materials. Because of their outstanding chemical, thermal and compression set resistance, perfluoroelastomers from 3M are a proven sealing solution in applications where other materials fail.

3M™ Dyneon™ Perfluoroelastomer PFE 40Z – the latest addition to 3M's perfluoroelastomer line – combines reliable performance in harsh environments with ease of processing. With Dyneon PFE 40Z perfluoroelastomer, you get the outstanding chemical and steam resistance of a peroxide cure elastomer – without sacrificing mechanical properties, and without requiring the addition of acid acceptors like zinc oxide.

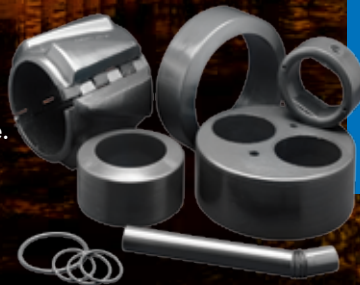

- Low Mooney viscosity for improved mold flow and extrusion
- Superb acid, ethylenediamine, steam and water resistance
- Fast curing
- Higher crosslink density
- Strong compression set resistance at 200°C
- Excellent mold release properties



# A reliable sealing solution for challenging applications

## Helping you build success

By continuing to invest in the development of innovative products like 3M™ Dyneon™ Peroxide Cure Perfluoroelastomer PFE 40Z, 3M is reaffirming its commitment to this industry – and to your continued success. Toward that end, we are also adding to our global fluoroelastomer production capacity, and will soon inaugurate our new 3M Corporate Research Center, which is destined to become a hub of innovation for fluoroelastomer product development.



- Oil and gas downhole seals
- Petrochemical pump seals
- Reactors
- Mixers
- Ink/printing systems
- Painting systems
- Rubber-metal bonding parts

As always, 3M Application and Product Development Engineers and Chemists are ready to help you find the best solution for your most challenging applications. Contact us today at [www.3M.com/advancedmaterials](http://www.3M.com/advancedmaterials).

**Warranty, Limited Remedy, and Disclaimer:** Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. User is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application. User is solely responsible for evaluating third party intellectual property rights and for ensuring that user's use of 3M product does not violate any third party intellectual property rights. Unless a different warranty is specifically stated in the applicable product literature or packaging insert, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OF NON-INFRINGEMENT OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

**Limitation of Liability:** Except where prohibited by law, 3M will not be liable for any loss or damages arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.

**Technical Information:** Technical information, recommendations, and other statements contained in this document or provided by 3M personnel are based on tests or experience that 3M believes are reliable, but the accuracy or completeness of such information is not guaranteed. Such information is intended for persons with knowledge and technical skills sufficient to assess and apply their own informed judgment to the information. No license under any 3M or third party intellectual property rights is granted or implied with this information.



### 3M Advanced Materials Division

3M Center

St. Paul, MN 55144 USA

Phone 1-800-810-8499

Web [www.3M.com/advancedmaterials](http://www.3M.com/advancedmaterials)

3M and Dyneon are trademarks of 3M Company. Used under license.

Please recycle. Printed in USA © 3M 2015.

All rights reserved. Issued: 9/15 10962HB  
98-0050-0052-0