



Novec™

Brand

3M™ Novec™ 4710 Insulating Gas

Introduction

3M™ Novec™ 4710 Insulating Gas is a sustainable alternative to sulfur hexafluoride (SF₆) for electrical equipment insulation and arc quenching applications. It offers excellent dielectric properties, a wide range of operating temperatures and significant reductions in environmental impacts compared to SF₆. Novec 4710 gas is non-flammable and has a wide safety margin for workers when used as designed for intended applications. This SF₆ alternative also has important environmental properties such as low global warming potential (GWP) when mixed with inert gases and zero ozone depletion potential (ODP). Novec 4710 gas in pure form has a relative dielectric strength two times greater than SF₆ at a given pressure.

Product description

Not for specification purposes. All values @ 25°C unless otherwise specified

Composition of 3M™ Novec™ 4710 Insulating Gas

Chemical Formula	(CF ₃) ₂ CFCN
2,3,3,3-tetrafluoro-2-(trifluoromethyl)-propanenitrile	99.3 mole %, minimum

Typical physical properties

Not for specification purposes. All values at 25°C unless otherwise specified

3M™ Novec™ 4710 Insulating Gas


Molecular Weight (g/mol)	195
Flash Point (°C)	Non-flammable
Boiling Point (°C)	-4.7
Freezing Point (°C)	-118
Critical Temperature (°C)	112.8
Critical Pressure (MPa)	2.50
Gas Density at 1 bar (kg/m ³)	7.9
Vapour Pressure (kPa)	252
Dielectric Strength at 1 bar, disk electrodes, 2.5 cm gap (kV)	27.5

Key features and benefits

- ▶ Excellent dielectric properties for medium and high voltage applications
- ▶ Wide range of operating temperatures and environments
- ▶ When used in a gas mixture, the greenhouse gas (GHG) impact can be reduced by up to 99% compared with SF₆
- ▶ Non-flammable
- ▶ Non-ozone depleting
- ▶ Wide safety margin for workers when used as designed for intended applications
- ▶ Compatible with a wide range of equipment components

Vapour pressure of Novec 4710 Insulating Gas compared to SF₆


Not for specification purposes. All values at 25°C unless otherwise specified

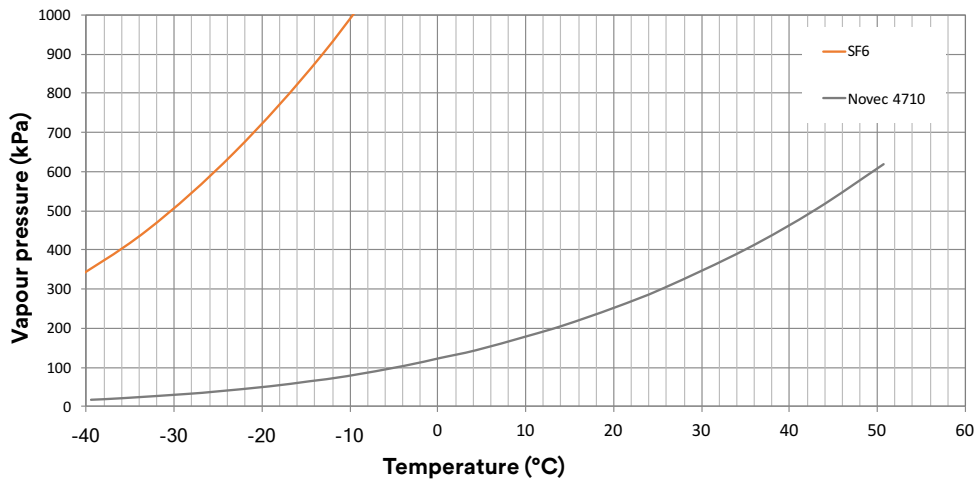

Dielectric breakdown voltage: mixtures of Novec 4710 Gas in CO₂

(Uniform field using parallel disk electrodes with 2.5cm gap)

Not for specification purposes. All values at 25°C unless otherwise specified

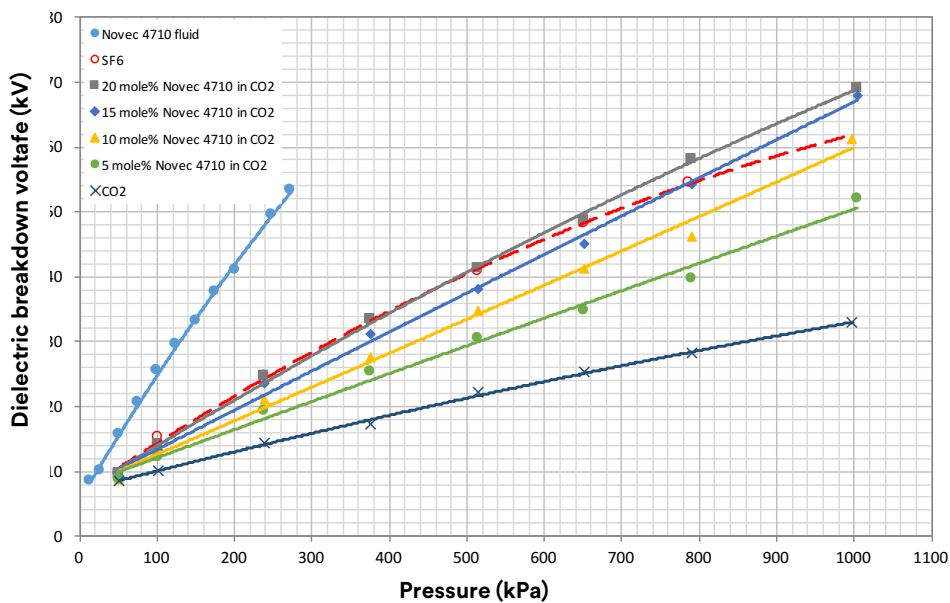

Typical applications

- ▶ Versatile insulating gas for medium and high voltage applications including gas insulated lines, gas insulated switchgear and circuit breakers
- ▶ Mix with inert gases for electric power industry applications
- ▶ Wide range of applications


Safety and handling

Before using this product, please read the current Safety Data Sheet (available at 3M.com/SDS or through your 3M sales or technical service representative) and the precautionary statement on the product package and labels. Follow all applicable precautions and directions.

Dielectric breakdown voltage of Novec 4710 Gas Compared to SF₆

(Uniform field using parallel disk electrodes with 2.5cm gap)

Not for specification purposes. All values at 25°C unless otherwise specified

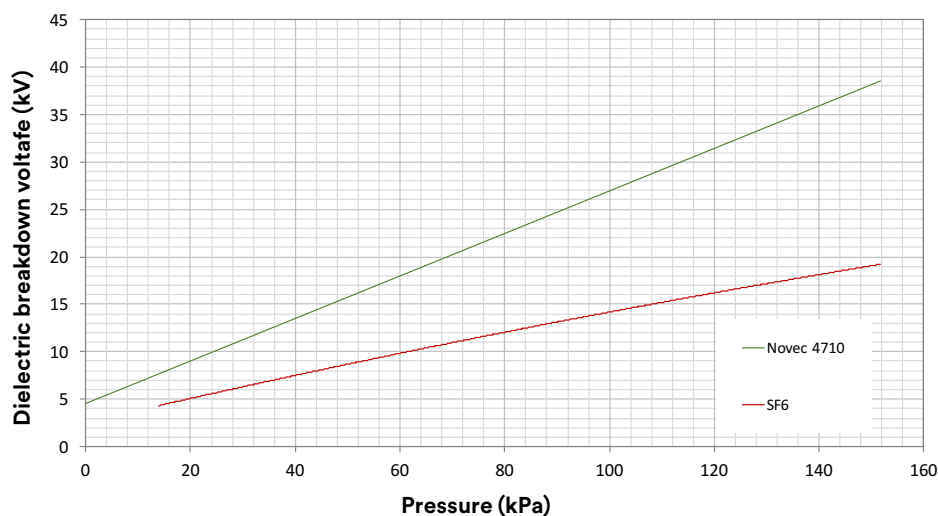

Environmental properties

	3M™ Novec™ 4710 Insulating Gas	SF ₆
Atmospheric lifetime (years)	30	3,200
Global Warming Potential (100-yr ITH, IPCC 2013 method)	2,100	23,500
Ozone Depletion Potential (CFC-11 = 1)	0	0

Materials compatibility

In practice, Novec 4710 gas differs somewhat in materials compared to SF₆. While the product is compatible with most common metals, it can be affected by some of the components found in lubricating greases and the elastomers used in gaskets and o-rings.

Many materials have been found to be compatible with the product. However, material compatibility is best evaluated using the specific materials of construction being considered for contact with the Novec 4710 gas. 3M research scientists are available to assist with material compatibility evaluations. Contact your local 3M sales representative for additional information.

Regulatory status

Novec 4710 gas is a single constituent product and has been REACH registered (Annex VII) in Europe and TSCI registered in Taiwan. It is currently under TSCA research and development status in the United States (pre-manufacture notice (PMN) in progress). It has been approved for low volumes in Korea. Registration and notification are in progress in other regions and countries. Contact your local 3M sales representative for additional information.

The 3M™ Novec™ brand family

The Novec brand is the hallmark for a variety of proprietary 3M products. Although each has its own unique formula and performance properties, all Novec products are designed in common to address the need for smart, safe and sustainable solutions in industry-specific applications. These include precision and electronics cleaning, heat transfer, fire protection, protective coatings, immersion cooling, advanced insulation media replacement solutions and several specialty chemical applications.

3M™ Novec™ Engineered Fluids ■ 3M™ Novec™ Aerosol Cleaners ■ 3M™ Novec™ 1230 Fire Protection Fluid ■ 3M™ Novec™ Electronic Grade Coatings ■ 3M™ Novec™ Electronic Surfactants ■ 3M™ Novec™ Insulating Gases

UK 3M Electronics Materials Solutions Division 0800 032 0841	Germany 3M Germany 49 2131 140	Belgium 3M Belgium 32 3 250 7521	Czech Republic 3M Czech Republic 420 2 61380111	3M East 41 4179 94040	France 3M France 33 1303 16161	Israel 3M Israel 972 9 9561490	Spain 3M Spain 34 91 3216000
Russia 3M Russia 7 495 7847474	Hungary 3M Hungary 36 1 270 7777	Romania 3M Romania 40 21 202 800	Italy 3M Italy 39 2 70351	Poland 3M Poland 48 22 739 6000	Switzerland 3M Switzerland 41 17249090	Lithuania 3M Baltics 370 5216 0780	

Regulatory: For regulatory information about this product, contact your 3M representative.

Technical information: The technical information, recommendations and other statements contained in this document are based upon tests or experience that 3M believes are reliable, but the accuracy or completeness of such information is not guaranteed.

Product use: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, user is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application.

Warranty, limited remedy, and disclaimer: Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF SUITABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

Limitation of liability: Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



Electronics Materials Solutions Division

3M United Kingdom PLC, 3M Centre, Cain Rd, Bracknell RG12 8HT, United Kingdom

0800 0320841

www.3M.com/novec

J382445.

3M and Novec are trademarks of the 3M company.
© 3M 2017. All rights reserved.