

Reduce your particulate contaminants. Keep your cool.

The water used in cooling water systems must be filtered to reduce particulates and help protect downstream process equipment from various sources of contamination at numerous entry points. External sources of particulate contamination include make-up water added in the cooling tower section, degradation of equipment seals, gasket materials and improper maintenance procedures. Particles can also originate within the system caused by rust or scale from piping and vessels.


Whether externally or internally generated, particulates can potentially cause serious problems:

Heat Exchanger Fouling

Solids deposited on heat exchanger surfaces can cause hot spots to form. Hot spots are where accelerated corrosion can occur, leading to heat exchanger failure and costly repairs or replacement.

Equipment Damage


A poor performing heat exchanger can reduce the ability of the process water to absorb heat from the process equipment, which can damage or lead to replacement of sensitive process side equipment. Particulates can also clog piping, valves and pumps—causing high maintenance or replacement costs.

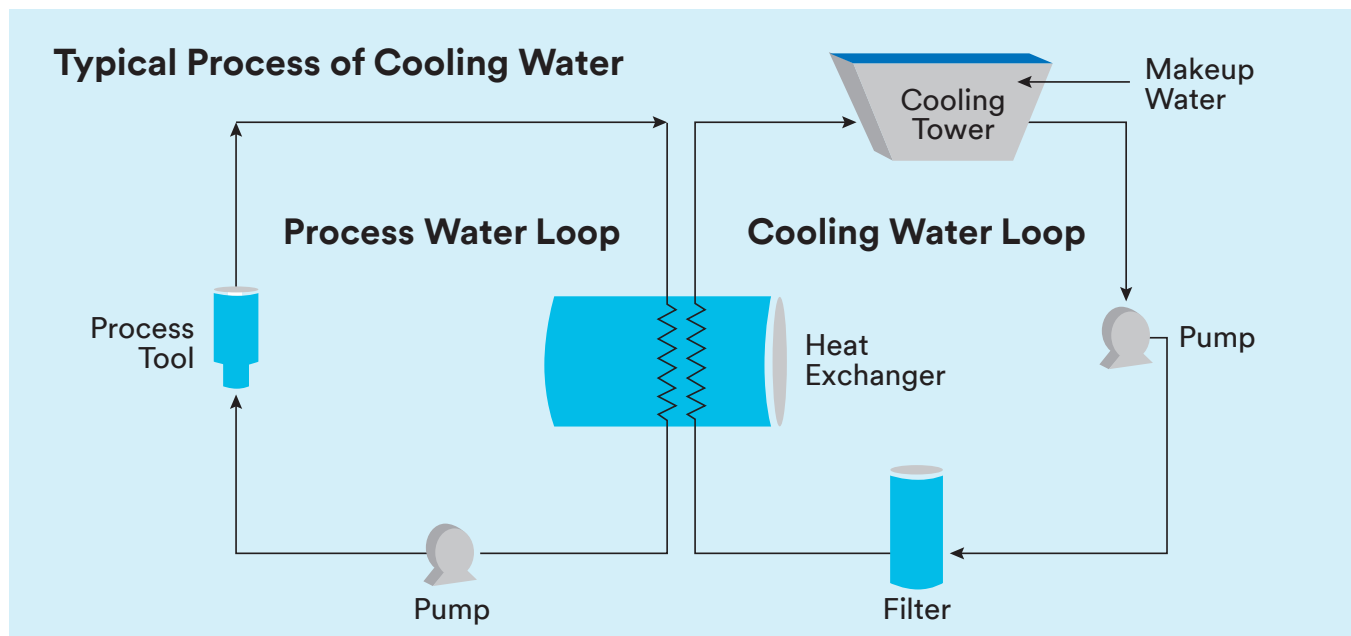

2,000 gpm (7,571 LPM) Flow Requirement


3M™ High Flow Filter System vs. Conventional 2.5" Nominal Depth Cartridge System

3M™ High Flow
Filter System



7 cartridges in a 24"
diameter housing

Competitive Nominal Depth Cartridges



120 cartridges in a 36" diameter housing

With High Flow, it's all systems go.

Effective filtration is important to proper operation of a cooling water system. 3M™ High Flow filter systems are ideally suited to provide effective filtration at the high flow rates typical in cooling water systems. The systems utilize large diameter (6.5") compound radial pleated cartridges in a compact housing design. These cartridges feature high efficiency polypropylene microfiber media that provides consistent, predictable particle reduction efficiencies.

Compared to conventional 2.5" nominal depth filter cartridges, 3M High Flow filter systems offer the following advantages:

- **Higher Particle Retention Efficiencies (99.9%):** Provides optimum protection of downstream equipment.
- **High Flow Capability:** Flow rates up to 500 gpm per 60" cartridge.
- **Compact Housing Design:** Reduces up-front capital expenditure requirements and footprint.
- **Ease of Use:** Fewer cartridges means filter change-outs are quicker and easier.
- **Twist-to-Lock Cartridge:** Provides a positive indication of proper sealing, reducing the possibility of bypass.

Product Selection and Use: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. As a result, customer is solely responsible for evaluating the product and determining whether it is appropriate and suitable for customer's application, including conducting a workplace hazard assessment and reviewing all applicable regulations and standards (e.g., OSHA, ANSI, etc.). Failure to properly evaluate, select, and use a 3M product and appropriate safety products, or to meet all applicable safety regulations, may result in injury, sickness, death, and/or harm to property.
Warranty, Limited Remedy, and Disclaimer: Unless a different warranty is specifically stated on the applicable 3M product packaging or product literature (in which case such warranty governs), 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR ARISING OUT OF A COURSE OF DEALING, CUSTOM, OR USAGE OF TRADE. If a 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.
Limitation of Liability Except for the limited remedy stated above, and except to the extent prohibited by law, 3M will not be liable for any loss or damage arising from or related to the 3M product, whether direct, indirect, special, incidental, or consequential (including, but not limited to, lost profits or business opportunity), regardless of the legal or equitable theory asserted, including, but not limited to, warranty, contract, negligence, or strict liability.



3M Purification Inc.
3M Separation and Purification Sciences Division
400 Research Parkway
Meriden, CT 06450 USA

Phone 1-800-243-6894
WW 1-203-237-5541
Web 3MPurification.com

Keep your cool at 3MPurification.com.

3M is a trademark of 3M Company.
Please recycle. Printed in USA.
© 3M 2019. All rights reserved.
70-0202-3113-3 REV 0519