


3M Application Profile

Market: Furniture and Woodworking, MRO

Application Description: Covering/wrapping rollers.

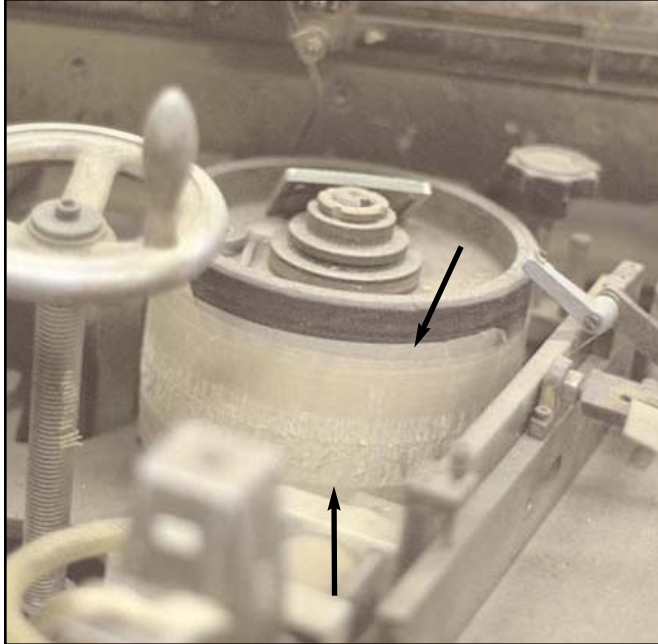

Application Method

Tape is used to ease the cleaning of guide rollers in automated adhesive applications. Tape is applied by hand.

Key Application Requirements

Abrasion resistant, heat resistant, resistant to adhesive residue, longevity.

Benefits/Advantages To Customer

Excellent heat resistance: High-temperature PTFE film tape provides long-lasting performance.

Anti-stick/release: Easy-release nature of PTFE film tape reduces cleanup time.

Chemical resistance: PTFE film tape is not affected by adhesive.

Conformability: PTFE film tapes hug rollers for easy application and effective service.

PRODUCT

3M™ PTFE Film Tape 5480

3M™ PTFE Film Tape 5481

Additional Product Information

Product	Backing/Adhesive	Backing Thickness	Total Thickness	Temp. Range
3M™ PTFE Film Tape 5480	PTFE/Silicone	2.0 mils (0.05 mm)	3.8 mils (0.09 mm)	-65 to 400° F (-54 to 204° C)
3M™ PTFE Film Tape 5481	PTFE/Silicone	5.3 mils (0.13 mm)	6.8 mils (0.172 mm)	-65 to 400° F (-54 to 204° C)

Key Decision Makers

Business Owners
Production Managers
Manufacturing Managers

For Additional Information

To request additional product information or to arrange for sales assistance, call 1-800-362-3550. Address correspondence to: 3M Industrial Business Customer Response Center, Building 21-1W-10, 900 Bush Avenue, St. Paul, MN 55106. Our fax number is 651-733-9175. In Canada, phone: 1-800-364-3577. In Puerto Rico, phone: 1-787-750-3000. In Mexico, phone: 52-70-04-00.

Product Use

All statements, technical information and recommendations contained in this document are based upon tests or experience that 3M believes are reliable. However, many factors beyond 3M's control can affect the use and performance of a 3M product in a particular application, including the conditions under which the product is used and the time and environmental conditions in which the product is expected to perform. Since these factors are uniquely within the user's knowledge and control, it is essential that the user evaluate the 3M product to determine whether it is fit for a particular purpose and suitable for the user's method of application.

Warranty and Limited Remedy

Unless stated otherwise in 3M's product literature, packaging inserts or product packaging for individual products, 3M warrants that each 3M product meets the applicable specifications at the time 3M ships the product. Individual products may have additional or different warranties as stated on product literature, package inserts or product packages. **3M MAKES NO OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE.** User is responsible for determining whether the 3M product is fit for a particular purpose and suitable for user's application. If the 3M product is defective within the warranty period, your exclusive remedy and 3M's and seller's sole obligation will be, at 3M's option, to replace the product or refund the purchase price.

Limitation of Liability

Except where prohibited by law, 3M and seller will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental, or consequential, regardless of the legal theory asserted, including warranty, contract, negligence, or strict liability.



Industrial Business

Building 21-1W-10, 900 Bush Avenue
St. Paul, MN 55106

Printed in the USA
54805481.pdf
© 3M 2005