
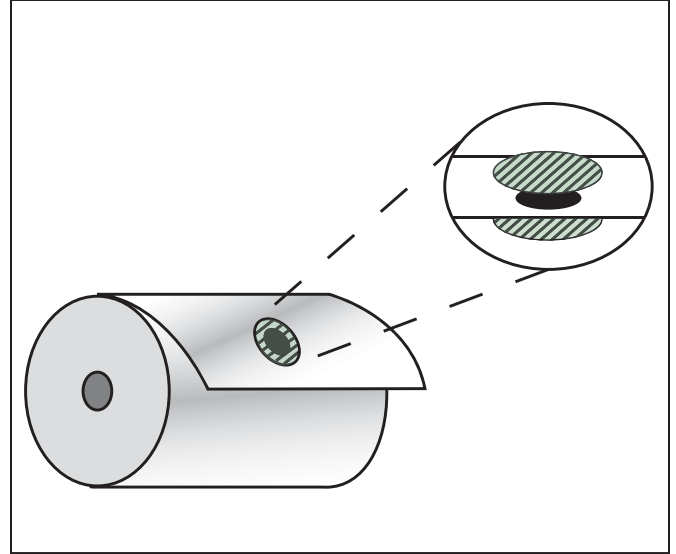


3M Application Profile

Market: Web Processing

Application Description: Hole patching at the re-reeler.

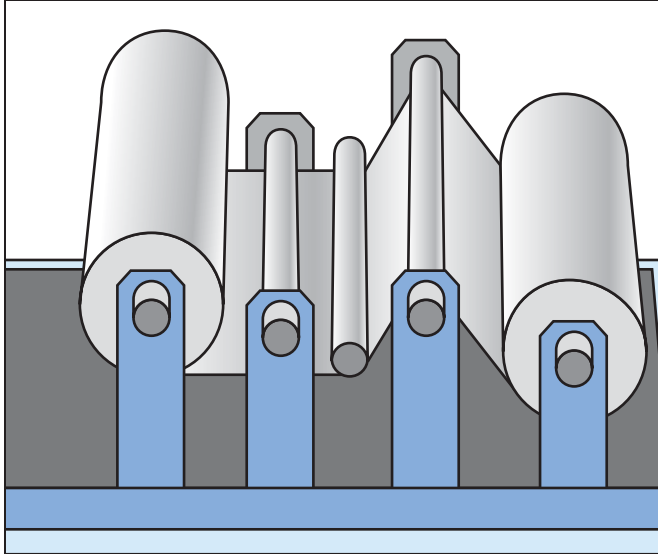

Application Method

By hand.

Key Application Requirements

Reliable hole patching with 3M™ Repulpable Single Coated Printable Splicing Tapes (white) or 9960.

Advantages/Benefits to Custome

High shear strength adhesive: High tack adhesive holds firmly to many grades of paper to help reduce the number of splices.

Thin, strong backing: Provides reliable hole patching that holds through coaters and super calendars—increasing yield through mill or printing operations.

Printable backing: Accepts coatings helping assure high quality printing without flaking or print distortion.

Easy-to-remove liner: Paper liner removes quickly to reduce application time and save labor costs.

White or translucent color: 9969 Blends with base paper.

FDA recognized adhesive: 3M tape can be used on most food grade papers.

PRODUCT

3M™ Repulpable Single Coated
Printable Splicing Tapes 9969 or
9960

3M Industrial and
Transportation Business

Process

Cut 3M™ Repulpable Single Coated Printable Splicing Tape 9960 and 9969 into a rounded or diamond shaped patch larger than the hole. Press the patch into place over the hole.

SIC Codes

2612 – Paper Mills

2631 – Paperboard Mills

265 – Paperboard Containers and Boxes

267 – Converted Paper and Paperboard Products

2672 – Coated and Laminated Paper

Key Decision Makers

Press Managers and Supervisors

Production Managers and Supervisors

Purchasing

Business Owners

For Additional Information

To request additional product information or to arrange for sales assistance, call 1-800-362-3550. Address correspondence to: 3M Industrial Business Customer Response Center, Building 21-1W-10, 900 Bush Avenue, St. Paul, MN 55106. Our fax number is 651-733-9175. In Canada, phone: 1-800-364-3577. In Puerto Rico, phone: 1-787-750-3000. In Mexico, phone: 52-70-04-00.

Product Use

All statements, technical information and recommendations contained in this document are based upon tests or experience that 3M believes are reliable. However, many factors beyond 3M's control can affect the use and performance of a 3M product in a particular application, including the conditions under which the product is used and the time and environmental conditions in which the product is expected to perform. Since these factors are uniquely within the user's knowledge and control, it is essential that the user evaluate the 3M product to determine whether it is fit for a particular purpose and suitable for the user's method of application.

Warranty and Limited Remedy

Unless stated otherwise in 3M's product literature, packaging inserts or product packaging for individual products, 3M warrants that each 3M product meets the applicable specifications at the time 3M ships the product. Individual products may have additional or different warranties as stated on product literature, package inserts or product packages. **3M MAKES NO OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE.** User is responsible for determining whether the 3M product is fit for a particular purpose and suitable for user's application. If the 3M product is defective within the warranty period, your exclusive remedy and 3M's and seller's sole obligation will be, at 3M's option, to replace the product or refund the purchase price.

Limitation of Liability

Except where prohibited by law, 3M and seller will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental, or consequential, regardless of the legal theory asserted, including warranty, contract, negligence, or strict liability.

