

# 3M Safety-Walk™ Anti-Slip Edge Sealer 1000

## Technical Data Sheet

October 2014

### Description:

The edge sealing compound is a liquid, water-based edge sealer designed to seal the exposed edges of the 3M™ Safety-Walk™ Anti-Slip Peelable Coating 3500.

This product seals exposed edges of the 3M™ Safety-Walk™ Anti-Slip Peelable Coating 3500 and provides additional protection against excessive moisture or liquid ingress and edge damage by traffic.


### Coverage:

Coverage can vary depending on application methods.

**Size:** 250 ml tube

### Application:

1. Shake the tube to ensure thorough mixing.
2. Use the tube as an applicator.
3. Place the tip of the tube on the floor surface next to the edge of anti-slip coating (see diagram below).
4. Move tube slowly around outside edges to apply a 2-4 mm wide line of sealer. Gently squeeze the tube as required.
5. Ensure the sealant makes contact with both the floor surface and the top surface of anti-slip coating.

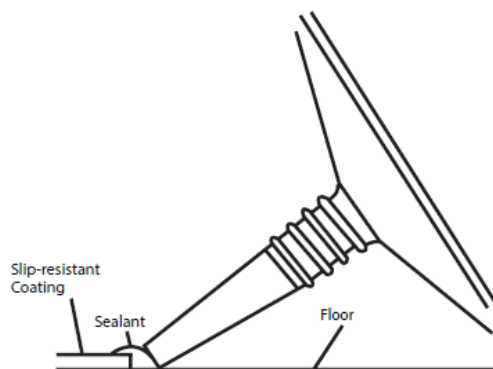

### Drying time

Allow 2 - 4 hours for drying before traffic exposure.

### Typical Properties

Test	Specification
Appearance & Odour	Clear liquid; low odour
Density: (Liquid)	1.03 g/ml
Flash Point: ASTM D93 (Pensky-Marten Closed Cup Flash Point Tester)	>100 °C
Viscosity: (Brookfield RVT)	1000 cps



### Application Temperature Range:

Minimum Temperature: 5 °C

Maximum Temperature: 40 °C

### Storage conditions:

Store in cool and dry conditions.

### Product Shelf Life:

1 Year

### Commercial Solutions Division

#### Cleaning & Workplace Safety Portfolios

3M Australia Pty Limited - Building A, 1 Rivett Rd., North Ryde, NSW, 2113  
3M New Zealand Limited - 94 Apollo Drive, Rosedale, Auckland, 0632

© 3M 2014. All rights reserved.  
3M, Scotch-Brite, ScotchBlue, Doodlebug,  
Scotchgard and Safety-Walk are trademarks of 3M Company.

**Important Notice to User:**

**Technical Information:** The technical information, recommendations and other statements contained in this document are based upon tests or experience that 3M believes are reliable, but the accuracy or completeness of such information is not guaranteed.

**Product Use:** Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, user is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application.

**Limitation of Liability:** Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted.

**Commercial Solutions Division**

**Cleaning & Workplace Safety Portfolios**

3M Australia Pty Limited - Building A, 1 Rivett Rd., North Ryde, NSW, 2113  
3M New Zealand Limited - 94 Apollo Drive, Rosedale, Auckland, 0632

© 3M 2014. All rights reserved.  
3M, Scotch-Brite, ScotchBlue, Doodlebug,  
Scotchgard and Safety-Walk are trademarks of 3M Company.