


PELTOR®

COMTAC ARC Attachment

Quick Reference Guide

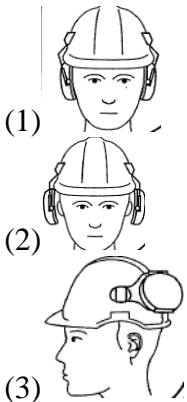

Operation

- Slide the Headset into the helmet rail dovetail slot.
- Ensure the base of the attachment is fully inserted and does not extend past the end of the dovetail slot.
- Ensure the locking tab engages one of the helmet rail slots.
- The cups can be set in three positions: (1) Closed Position,
- (2) Open Position, and (3) Rotated Position
- When in use, the cups must be placed in the Closed Position.
- With Cups over the ears, press the wires inward till you hear a "click" on both sides
- Cups can be adjusted by sliding up or down
- Please See your *COMTAC ACH Quick User Guide* for Headset Operation

Warnings

- When not in use, store in Closed Position. Storing in Open or Rotated Position, will cause damage to the spring / tension mechanism
- Do not press the cups into the helmet shell as this will lock the spring in the ear arm and damage the attachment slot
- Further User instruction of the headset are provided in the COMTAC ACH Quick Reference Guide



Address for Repair and Warranty:

3M Peltor
Attn: Repairs
5457 West 79th Street
Indianapolis, IN, 46268

Technical and Customer Service

1-800-665-2942

The 3M logo, consisting of the letters "3M" in a bold, red, sans-serif font.