



Science.
Applied to Life.™



Quick sticks and tight holds. Where you need it most.

3M™ High Performance Flatback Tape 2519

When consistency is critical, you need a brand you can trust. And now you don't need to compromise quality for a lower price. 3M Tape 2519 is priced to sell.

Use this high performance tape for liner boards, bundling, holding, packaging applications, reinforcing, wrapping and protecting. Its rubber adhesive holds securely on materials such as kraft paper, linerboard and uncoated freesheet (office paper).

- Can be used on many grades of brown paper and paperboards for general splicing, roll starting, tabbing and roll closure applications
- High strength paper backing for surface protection when applying thick-coat paint or caulk
- Lower unwind tension and hand tearable
- Can be machine dispensed

Go-to pricing you'll get stuck on.




3M™ High Performance Flatback Tape 2519

3M Tape 2519 outperforms competitive brands in adhesion to linerboard, uncoated freesheet and kraft paper (comparable to industry favorite 3M Tape 2517 in adhesion to these paper products). Offers an alternative solution where process temperatures range up to 200°F (93°C).

- 3.5 times better sheer
- 3 times better adhesion to paper (fiberboard)



Flatback Comparison

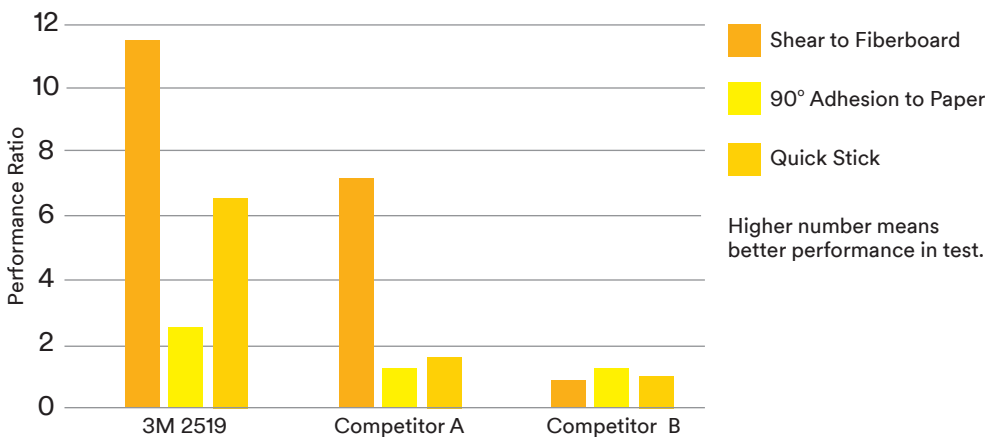

Backing: Unbleached kraft paper
 Adhesive: Rubber
 Tape thickness: 7.3 mils (0.19 mm)
 Temperature use range:
 Up to 200°F (93°C)

UPC	Product ID	Color	Size	Case	Units
00-638060-53595-0	XG700013947	Tan	18 mm x 55 m	48	RL
00-638060-53593-6	XG700013954	Tan	24 mm x 55 m	36	RL
00-638060-53596-7	XG700013962	Tan	36 mm x 55 m	24	RL
00-638060-53591-2	XG700013798	Tan	48 mm x 55 m	24	RL
00-638060-53592-9	XG700013806	Tan	72 mm x 55 m	12	RL
00-638060-53594-3	XG700013714	Tan	100 mm x 55 m	8	RL

For more information on 3M masking tapes, contact your local 3M representative or call 1-800-362-3550.



Closure and Masking Systems Division
 3M Center, Building 225-3S-06
 St. Paul, MN 55144-1000

Phone 800-362-3550
 Web 3M.com/Masking

Product Use: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, user is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application.

Warranty, Limited Remedy and Disclaimer: Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

Limitation of Liability: Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.

3M is a trademark of 3M. © 3M 2021. All rights reserved. Please recycle. Printed in USA. 70-0716-1687-7 Rev 2/21