

# 3M™ Enhanced Specular Reflector Films

## (3M™ ESR)

- ESR 65 Auto
- ESR 80v2 Auto

### Product Description

3M™ Enhanced Specular Reflector Films (ESR) maximize the recycling efficiency of liquid crystal display backlights. 3M ESR is >98% reflective across the visible spectrum and contains no metal.




### Construction/Performance

Product	3M ESR 65 Auto	3M ESR 80v2 Auto
Reflectivity (minimum)	98%	98%
Caliper (microns)	65 +/- 4	82 +/- 4
Halogen Free	No	Yes

# Backlight Efficiency

Reflector Impact Comparison

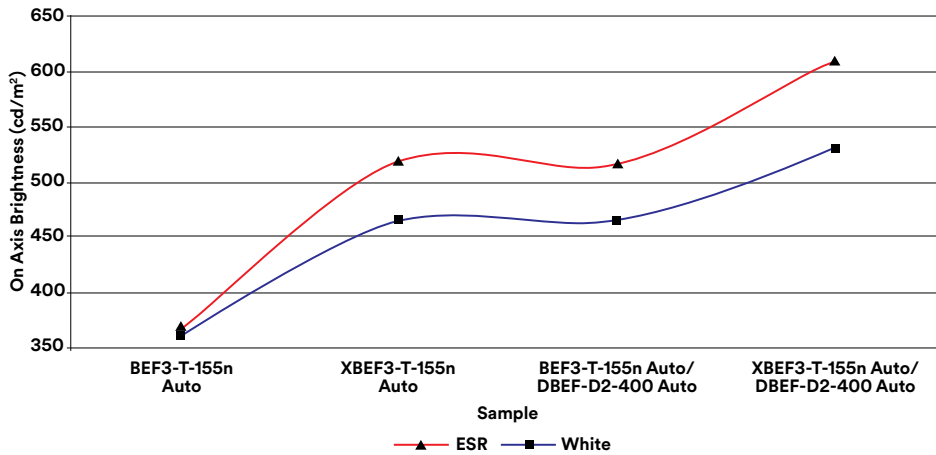

## Automotive Display – Recommended Solutions

Partial Instrument Cluster	Full Instrument Cluster	Center Stack
High Axial Brightness	High Efficiency	Minimal Windscreen Reflection
<p>3M DBEF-D2-400 Auto</p> <p>3M BEF3-T-155n Auto</p> <p>3M BEF3-T-155n Auto</p> <p>Bottom Diffuser</p> <p>LGP</p> <p>3M ESR Auto</p>	<p>3M DBEF-D2-400 Auto</p> <p>3M BEF3-T-155n Auto</p> <p>Bottom Diffuser</p> <p>LGP</p> <p>3M ESR Auto</p>	<p>3M ALCF-A3+</p> <p>3M BEF3-T-155n Auto</p> <p>Bottom Diffuser</p> <p>LGP</p> <p>3M ESR Auto</p>
Axial Luminance = 974 nits Gain = 2.8	Axial Luminance = 836 nits Gain = 2.4	Axial Luminance = 706 nits Gain = 2.1

## Automotive Environmental Testing

	Condition	Time
High Temperature	95°C	1000 hours
Low temperature	-40°C	1000 hours
Temperature/ Humidity	65°C/90%RH	1000 hours
Thermal Shock	-40°C to 95°C	1 hour dwell/ 100 cycles

## Technical Information

The technical information, recommendations and other statements contained in this document are based on tests or experience 3M believes reliable, but the accuracy or completeness of such information is not guaranteed.

### Product Use

Many factors beyond 3M's control and uniquely within the user's knowledge and control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, user is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for the user's method of application.

## Warranty, Limited Remedy, and Disclaimer

Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM, OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

### Limitation of Liability

Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



**3M Display Materials & Systems Division**

3M Center, Building 235-1E-54  
St. Paul, MN 55144-1000 U.S.A.

Phone 1-800-3M HELPS  
Web [3M.com/displayfilms](http://3M.com/displayfilms)

3M is a trademark of 3M Company.  
All other trademarks herein are the property of  
their respective owners.  
© 3M 2017. All rights reserved. dz22665