



Science.
Applied to Life.™



Isolate and bond dissimilar materials.

3M™ Structural Adhesive Tape SAT1010

- Helps prevent corrosion, including galvanic corrosion
- Enables production speed application
- Serves as an alternative to sealing methods
- Simplifies current production process
- Reduces application variability





3M™ Structural Adhesive Tape SAT1010

Structural Adhesive Tape Solution

A disruptive technology, providing:

- A wide range of cure or processing profiles
 - Reduces manufacturing costs associated with material prep and cleaning
 - Simplifies current manufacturing processes
 - Fits easily into existing OEM processes
- The potential for automated tape application
 - Provides worry-free assembly and a repeatable process
 - Improves quality by reducing variability of application
- Tape adheres to multiple materials
 - Helps enable lightweighting
- Multiple tape formats
 - Available in levelwound rolls or as die-cut
 - Can be applied in defined locations
- A ready to apply product that has consistent thickness
 - Improves quality by reducing variability of applications
 - Is cleaner to apply than liquid adhesives
 - May offer a reduction in rework

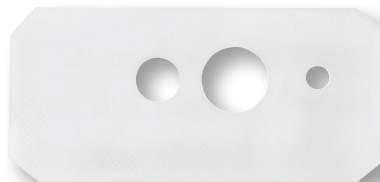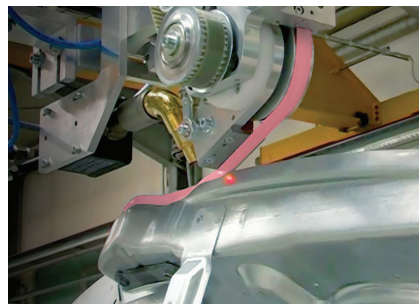

For Isolation and Bonding of Dissimilar Materials

May reduce corrosion warranty claims in some applications by:

- Sealing and bonding metals
- Preventing water ingress
- Providing gap filling

Contact Information

The information provided in this technical document is intended as a guide for this product. For more information or help in selecting a 3M product for an application, please contact your 3M technical service representative or call 1-800-328-1684.

3M is a trademark of 3M Company.

Technical Information: The technical information, recommendations and other statements contained in this document are based upon tests or experience that 3M believes are reliable, but the accuracy or completeness of such information is not guaranteed.

Product Use: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, user is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application.

Warranty, Limited Remedy, and Disclaimer: Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

Limitation of Liability: Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



Automotive and Aerospace Solutions Division

3M Center
St. Paul, MN 55144-1000
1-800-328-1684
3M.com/autosolutions