



Trusted Quality Fall Protection



IFU 5902392

EN

## SPECIFIC INSTRUCTIONS



**EN795 CLASS B**  
Please read this User Manual carefully before installing and using this product.

## Fixed Anchorage Point

Model Number: AM210






X 1


### USER INSTRUCTION MANUAL FIXED ANCHORAGE POINT

This manual is intended to meet the Manufacturer's Instructions and should be used as part of an employee training program.


1

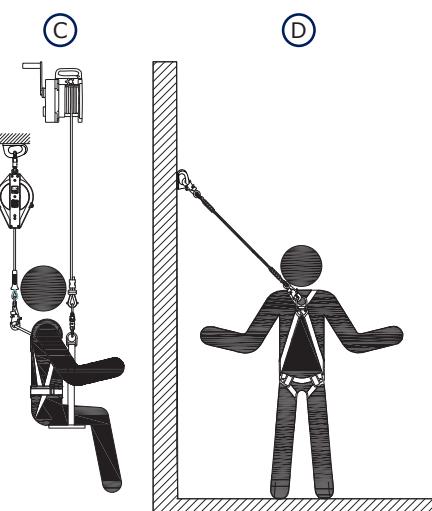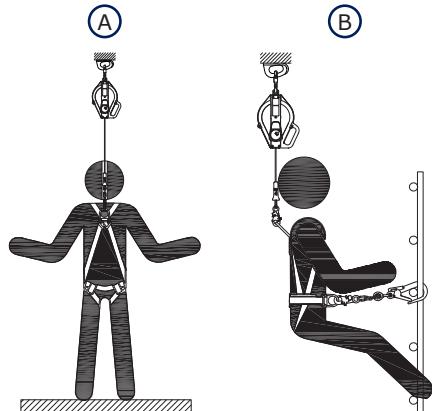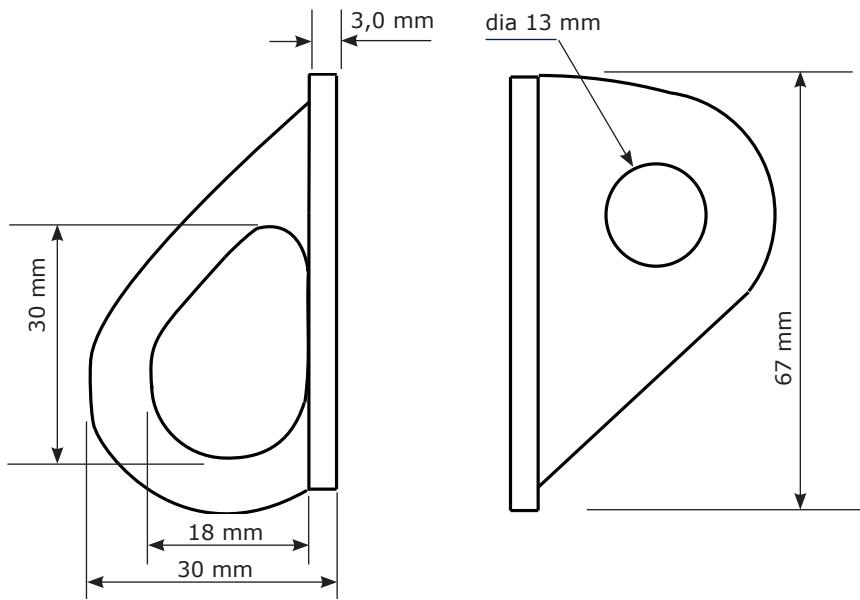


2

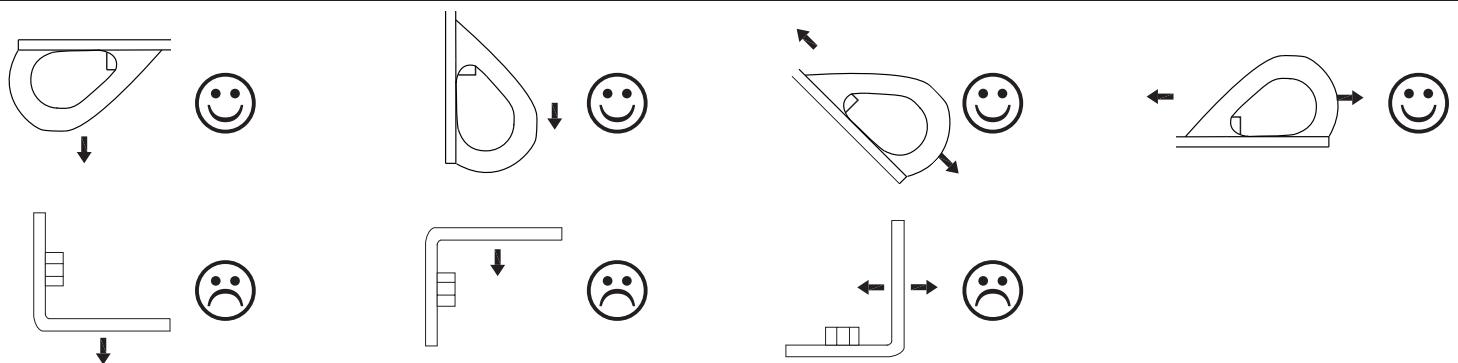


3

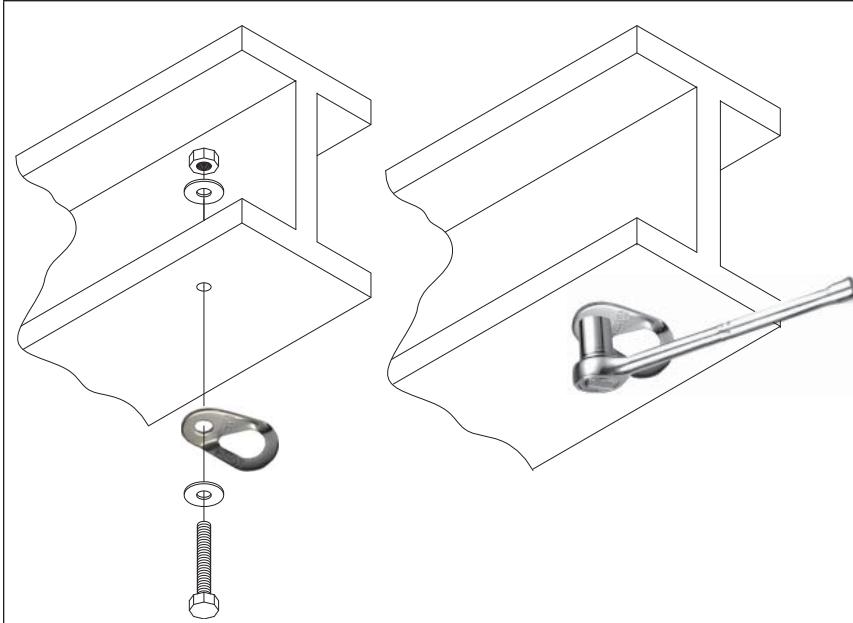

4

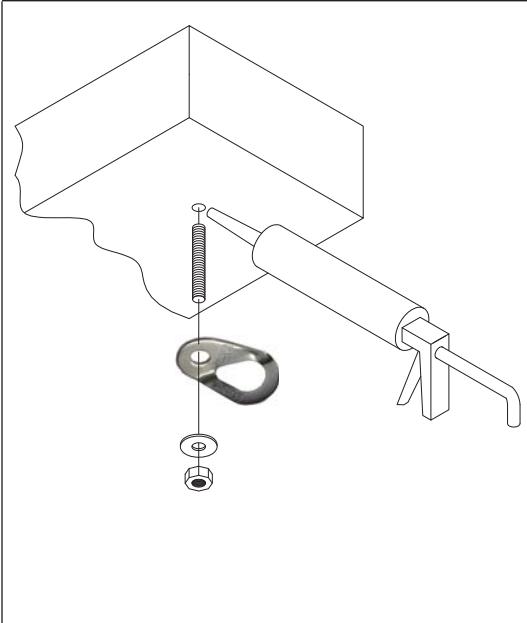

5

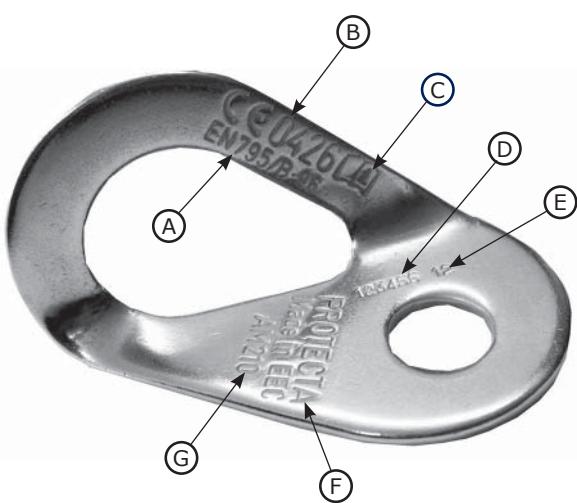

This instruction describes installation and use of the Protecta Fixed Anchorage Point. It should be used as part of an employee training program.

**IMPORTANT:** Before using this equipment, record the product identification information from the product markings (identified in photo on front cover) on the 'Equipment Identification Sheet' at the back of the "General Instructions for Use and Maintenance" (5902392).

**PURPOSE**

**DESCRIPTION:** The Protecta Fixed Anchorage Point (Figure 1) is a stainless steel anchor rated for one user in two directions. It installs in steel structures with an M12 A2 or A4 class bolt, or in masonry with an M12 chemical resin fastener.

**APPLICATIONS:** Figure 1 illustrates typical applications. The Fixed Anchorage Point can be used as an anchorage point for Fall Arrest (A), Positioning (B), Suspension (C), and Fall Restraint (D) systems.

**USE**

The Fixed Anchorage Point is a single point fall arrest anchor tested to, and in conformance with EN795 Class B. It can serve as the anchorage point(s) for a lanyard. The Fixed Anchorage Point allows the user full freedom in the work zone while securely connected to a safety system. Users should attach to the Fixed Anchorage Point via a energy absorbing lanyard attached to a full body harness.

**WARNING:** When connecting to the Fixed Anchorage Point, exercise caution and observe that the connector is fully closed and locked. Failure to establish secure connections to the Fixed Anchorage Point for the rescuer or rescue subject may cause severe injury or death.

**WARNING:** Working at height has inherent risks. Risks include, but are not limited to: falling, suspension/ prolonged suspension, striking objects, and unconsciousness. In the event of a fall arrest and/or subsequent rescue (emergency) situation, some personal medical conditions may affect your safety. Medical conditions identified as risky for this type of activity include, but are not limited to the following: heart disease, high blood pressure, vertigo, epilepsy, drug or alcohol dependence, psychiatric illness, impaired limb function, and balance issues. We recommend that your employer/physician determine if you are fit to handle normal and emergency use of this equipment. A rescue plan must be in place to deal with any emergencies that could arise during work.

**WARNING:** Do not use the Fixed Anchorage Point for applications other than those addressed in these instructions. Inappropriate use may result in injury or death. This product is part of a fall protection system. Installers and users must read and follow the manufacturer's instructions for each component of the system. Alterations or misuse of this equipment, or failure to follow instructions, may result in serious injury or death.

**TRAINING:** It is the responsibility of users of this equipment to understand these instructions and be trained in correct installation, use, and maintenance of this equipment. Users must be aware of the consequences of improper installation or use of this equipment. This instruction manual is not a substitute for a training program. Training by a competent person trainer<sup>1</sup> must be provided on a periodic basis to ensure user proficiency. Contact Capital Safety for information on training classes, or if you have questions regarding use of this equipment.

**PERSONAL PROTECTIVE EQUIPMENT (PPE):** All types of Fall Arrest or Restraint PPE may be attached to the Fixed Anchorage Point. PPE used with the Fixed Anchorage Point must be tested to relevant EN standards and bare the CE mark where appropriate. Other fall arrest equipment, such as inertial reel retractable blocks or rope grabs can be used with the Fixed Anchorage Point. Consult the manufacturer's instructions for orientation restrictions. A full body harness is the only acceptable body-holding device that can be used with a Fall Arrest system.

**WARNING:** All Personal Protective Equipment (PPE) must be used and inspected in accordance with the manufacturer's instructions for use. Always consult the manufacturer to determine suitability of use with the Fixed Anchorage Point with respect to connectors, fall clearances, sharp edges, etc.

**CAPACITY:** As noted on the product markings, the maximum number of persons that can be connected to the Fixed Anchorage Point for Fall Arrest purposes is one (1) user. The maximum allowable weight (including equipment and clothing) for the person connected to the Fixed Anchorage Point is 100 kg.

**APPLIED LOADS:** Figure 2 shows correct (☺) and incorrect (☹) loading directions for the Fixed Anchorage Point. Loads should always be applied in directions parallel to the anchor faces and never perpendicular to the anchor faces. The Fixed Anchorage Point is designed for use with systems that limit applied arrest loads to 6 kN or less. Static loads must not exceed 272 kg. Only one person can be attached to the Fixed Anchorage Point. Attachment of two PPE systems by a single user is prohibited.

<sup>1</sup> **COMPETENT PERSON TRAINER:** An individual who by training, knowledge, and experience is capable of conducting competent person training.

**FALL FACTORS:** The Fixed Anchorage Point can be used in all Fall Factor situations: 0, 1, or 2.

**PRE-USE INSPECTION:** Prior to each use to the Fixed Anchorage Point, inspect the Fixed Anchorage Point per the instructions in Table 1.

## INSTALLATION

Installation of the Fixed Anchorage Point must be performed by competent person(s)<sup>2</sup> familiar with the Fixed Anchorage Point. The following guidelines must be read and understood by all members of the installation team:

**PRIOR TO INSTALLATION:** Plan your fall protection system. Consider all factors that will affect safety during use of the equipment. Select a suitable strength structure that will prove overall safety and proper loading strength. The Fixed Anchorage Point installation should factor in the following considerations:

- Height above the work surface
- Clearance to first obstacles
- Work area hazards
- Type of fall protection system desired/needed.
- PPE to be used in the system

**IMPORTANT:** If you have questions on the use, care, or suitability of this equipment for your application, contact Capital Safety. Modification and alteration of the Fixed Anchorage Point is not permitted without prior agreement from Capital Safety.

**WARNING:** When working at height to install the Fixed Anchorage Point, use fall protection incorporating anchorage independent of the anchorage you are installing.

**ANCHORAGE STRUCTURE:** The structure to which the Fixed Anchorage Point is mounted must be capable of sustaining 12 kN of force in the anticipated direction(s) of loading (see Figure 2). Each Fixed Anchorage Point location must be capable of sustaining this load.

**PLANE OF ANCHORAGE SURFACE:** If the Fixed Anchorage Point is to be installed on a surface that is not perpendicular to the user walking level (e.g., curved or inclined roof, narrow ledge at head height), or a curved surface perpendicular to the user walking level (e.g., silo or vat), consult Capital Safety prior to installation.

**INSTALLATION HEIGHT:** The Fixed Anchorage Point may be installed at any practical height above the work surface.

**RESTRAINT SYSTEMS:** Where possible, installations should be designed as a restraint application (see Figure 1). Restraint systems prevent the user from reaching a position where a fall can occur; therefore, no free-fall is possible.

**FALL ARREST SYSTEMS:** When the Fixed Anchorage Point is used in a Fall Arrest system, it is important to consider the following factors during design:

- **Anchorage Point** - Mount anchors as high as possible in relation to the user. This minimizes possible free fall, making rescue easier and less distressing on the victim. Avoid anchor locations that increase the chance of swing fall. Swing falls occur when the anchorage point is not directly above the point where a fall occurs. The force of striking an object in a swing fall may cause serious injury or death. Minimize swing falls by working as close to the anchorage point as possible.
- **Anchor Orientation** - The Fixed Anchorage Point must be correctly oriented to support the loads applied by the system (see Figure 2).
- **Hazards** - The work area and path below should be free of any hazards (vehicles, fences, balconies, pedestrians, water/chemicals, etc.) that could injure the user or others if a fall occurs.

**FASTENING REQUIREMENTS:** The Fixed Anchorage Point is installed with M12 fasteners:

- (Figure 3) Install in metal with an M12 A2 or A4 Class Stainless Steel Bolt.
- (Figure 4) Install in masonry with an M12 Adhesive Anchoring System (Hilti HIT-HY 150 or equivalent). Follow the manufacturer's instructions for installing the Adhesive Anchoring system.
- A Locking Nut and Washer must be used in all installations. All fasteners should be tightened to the fastener manufacturer's torque recommendations.
- Attach the included Installation Label to the Fixed Anchorage Point after installation.

**PROOF LOAD TESTING:** After installation, the Fixed Anchorage Point must be proof loaded. Using a tension tester, apply a 5kN load for at least 15 seconds in a direction perpendicular to the mating surface. There should be no pull out of fixing or deformation of eye.

<sup>2</sup> **COMPETENT PERSON:** An individual designated by the employer to be responsible for the immediate supervision, implementation, and monitoring of the employer's managed fall protection program who, through training and knowledge, is capable of identifying, evaluating, and addressing existing and potential fall hazards, and who has the employer's authority to take prompt corrective action with regard to such hazards.

**NOTE:**

- Capital Safety strongly recommends that all anchors be fitted in accordance with the manufacturers instructions for use, and with the installation requirements of EN 795 Class B and BS 7883 Class B (UK only).
- Proof loading is not required for through-hole installations in steel structure, unless required by the purchaser.
- Each of Fixed Anchorage Point must sustain the 500 kg proof load without showing any deformation, permanent yield, or slip of the fastener. Any of these occurrences constitutes a failure. Any failure indicates that the type of fastener tested is not suitable for use in the building material tested and must be rejected. The fastener manufacturer should be consulted for recommendation of a suitable fastener for the base material.
- In the event of a failure, a suitable fastener must be acquired and re-tested. Any rejected anchors must be discarded and their mounting holes plugged to prevent subsequent use.
- After testing the structural material should be carefully examined for cracking, or other signs of failure. This is essential where an anchor is close to the edge of the structural material. For anchors near the edge of a structure, suitability of the intended fastener should be verified with the manufacturer.

**INSPECTION AND SERVICE**

Table 1 lists inspection and service processes and their frequencies. Servicing should only be performed by a trained Competent Person<sup>2</sup>. Do not use the Fixed Anchorage Point being inspected/serviced. A different anchorage point and independent fall protection should be utilized.

**Table 1 - Inspection & Service**

Frequency		Inspection/Service:	Action:
Before Each Use	Every Year		
X		Verify that all components of the attached safety system are securely and correctly connected together.	Reconnect components which are not correctly connected. Consult the manufacturer's User Instructions for connection requirements.
X	X	Inspect the Fixed Anchorage Point for defects in the metal (excessive corrosion, wear, splits, cracks, bends, etc.).	If defects are sufficient to decrease the strength of the Fixed Anchorage Point, remove the anchor from service and replace.
X	X	Inspect the markings on the Fixed Anchorage Point (see cover photo). All markings should be present and legible.	If markings are not present or are illegible, remove the anchor from service and replace.
X	X	Inspect the fastener(s) and structural material for damage that could affect the anchors holding strength. Inspect the surrounding work area to ensure no hazards or obstructions are present which may injure the user or affect system performance.	Replace damaged fasteners. Re-install the anchor in a new hole if structural material around the mounting hole is damaged. Where the anchor is installed in masonry with an adhesive anchoring system, Re-install in a new hole.
	X	<b>Installations in Masonry:</b> Every 12 months, proof load test anchors installed in masonry (see <i>Proof Load Testing</i> ). Torque fasteners with a torque wrench to the manufacturer's recommended torque value. <b>Defective articles must be replaced.</b>	
	X	<b>Through-Hole Installations in Metal:</b> Every 12 months, visually inspect through-hole anchor installations in metal for defects in the surrounding metalwork. Torque fasteners with a torque wrench to the manufacturer's recommended torque value. <b>Defective articles must be replaced.</b>	

**IMPORTANT:** Extreme working conditions (harsh environments, prolonged use, etc.) may require more frequent inspection. Record the inspection/service date and results in the 'Periodic Examination and Repair History' in the "General Instructions for Use and Maintenance" (5902392).

**IMPORTANT:** Equipment should be removed from use if pre-use inspection creates any doubt about the equipment condition. Equipment must not be put back into service until a competent person confirms in writing that it is acceptable to do so.

**IMPORTANT:** In the event of a fall and subsequent fall arrest, the Fixed Anchorage Point must be withdrawn from use and inspected by a competent person to determine if it can be returned to service. If it is returned to service, this action must be recorded in the Inspection and Maintenance Log in this instruction.

**IMPORTANT:** To ensure user safety if the Fixed Anchorage Point is resold outside the original country of destination, the reseller must provide instruction for use, maintenance, periodic inspection and repair in the language of the country in which the product is to be used.

**MARKINGS** (See Figure 5)

(A)	Standard to which Anchor conforms.
(B)	Notified body number.
(C)	Read user instruction.
(D)	Serial number.
(E)	Year manufactured.
(F)	Brand name.
(G)	Part number.

## **INSPECTION AND MAINTENANCE LOG**

EN

### LIMITED LIFETIME WARRANTY

**Warranty to End User:** CAPITAL SAFETY warrants to the original end user ("End User") that its products are free from defects in materials and workmanship under normal use and service. This warranty extends for the lifetime of the product from the date the product is purchased by the End User, in new and unused condition, from a CAPITAL SAFETY authorised distributor. CAPITAL SAFETY'S entire liability to End User and End User's exclusive remedy under this warranty is limited to the repair or replacement in kind of any defective product within its lifetime (as CAPITAL SAFETY in its sole discretion determines and deems appropriate). No oral or written information or advice given by CAPITAL SAFETY, its distributors, directors, officers, agents or employees shall create any different or additional warranties or in any way increase the scope of this warranty. CAPITAL SAFETY will not accept liability for defects that are the result of product abuse, misuse, alteration or modification, or for defects that are due to a failure to install, maintain, or use the product in accordance with the manufacturer's instructions. THIS WARRANTY IS THE ONLY WARRANTY APPLICABLE TO OUR PRODUCTS AND IS IN LIEU OF ALL OTHER WARRANTIES AND LIABILITIES, EXPRESSED OR IMPLIED.

### Garantie limitée à vie

**Garantie de l'utilisateur final :** CAPITAL SAFETY garantit à l'utilisateur final d'origine (« Utilisateur final ») que ses produits sont exempts de défauts de matériaux et de fabrication dans des conditions d'utilisation et d'entretien normales. Cette garantie s'étend pendant toute la durée de vie du produit à compter de la date d'achat du produit par l'utilisateur final, comme produit neuf et inutilisé, auprès d'un distributeur agréé. L'entièr responsabilité de CAPITAL SAFETY envers l'utilisateur final et le recours exclusif de l'utilisateur final dans le cadre de cette garantie se limite à la réparation ou au remplacement en nature de tout produit défectueux pendant sa durée de vie (si CAPITAL SAFETY, à sa seule discrétion, le juge nécessaire). Aucune information ni aucun conseil, qu'ils soient oraux ou écrits, donnés par CAPITAL SAFETY, ses distributeurs, directeurs, responsables, agents ou employés ne créera de garanties différentes ou supplémentaires ni n'augmentera l'étendue de cette garantie. CAPITAL SAFETY n'assumera en aucun cas la responsabilité de défauts résultant d'une utilisation abusive du produit, de sa mauvaise utilisation, de son altération ou de sa modification, ou de défauts découlant du non-respect des instructions du fabricant en matière d'installation, d'entretien ou de conditions d'utilisation. CETTE GARANTIE EST LA SEULE GARANTIE APPLICABLE À NOS PRODUITS ET ELLE REMPLACE TOUTES LES AUTRES GARANTIES ET RESPONSABILITÉS EXPRIMÉES OU IMPLICITES.

IT

### Garanzia di durata limitata

**Garanzia dell'utente finale:** CAPITAL SAFETY garantisce all'utente finale originale (di seguito "Utente finale") che i suoi prodotti sono privi di difetti dei materiali e di fabbricazione se utilizzati nelle normali condizioni d'uso e di servizio. La garanzia copre l'intera durata del prodotto dalla data di acquisto del prodotto da parte dell'Utente finale come prodotto nuovo e mai usato da un distributore autorizzato CAPITAL SAFETY. La responsabilità complessiva di CAPITAL SAFETY nei confronti dell'Utente finale e il ricorso esclusivo dell'Utente finale ai sensi della presente garanzia sono limitati alla riparazione o alla sostituzione in natura dei prodotti difettati entro la durata (così come stabilita a propria esclusiva discrezione da CAPITAL SAFETY). Eventuali informazioni orali o scritte o consigli forniti da CAPITAL SAFETY, dai suoi distributori, direttori, funzionari, agenti o dipendenti non potranno in alcun modo dare origine a garanzie diverse o aggiuntive né potranno ampliare l'ambito della presente garanzia. CAPITAL SAFETY non potrà essere ritenuta responsabile dei difetti derivati da un cattivo o errato utilizzo del prodotto, da alterazioni o modifiche o da difetti dovuti ai mancati installazione, manutenzione o uso del prodotto in conformità alle istruzioni del produttore. LA PRESENTE GARANZIA È L'UNICA GARANZIA APPLICABILE AI NOSTRI PRODOTTI E SOSTITUISCE QUALSIASI ALTRA GARANZIA E RESPONSABILITÀ, ESPRESSE O IMPLICITE.

### Lebenslange Garantie mit Einschränkung

**Endbenutzer-Garantie:** CAPITAL SAFETY garantiert dem ursprünglichen Endbenutzer („Endbenutzer“), dass seine Produkte unter normalem Gebrauch und Betrieb frei von Material- und Herstellungsfehlern sind. Diese Garantie erstreckt sich auf die Lebensdauer des Produkts ab dem Datum, an dem der Endbenutzer das Produkt neu und ungebraucht von einem durch CAPITAL SAFETY autorisierten Händler gekauft hat. Die gesamte Haftung von CAPITAL SAFETY dem Endbenutzer gegenüber und der einzige Anspruch des Endbenutzers ist gemäß dieser Garantie beschränkt auf die Reparatur oder den Ersatz von defekten Produkten innerhalb ihrer Lebensdauer (eine Einschätzung diesbezüglich wird von CAPITAL SAFETY nach eigenem Ermessen durchgeführt). Keine von CAPITAL SAFETY schriftlich oder mündlich an Händler, Vorstandsmitglieder, Führungskräfte, Agenten oder Angestellte übergegebenen Informationen oder Hinweise ergeben jegliche andere oder zusätzliche Gewährleistungen, noch erhöhen sie den Umfang dieser Garantie. CAPITAL SAFETY schließt eine Haftung für Defekte aufgrund von unsachgemäßem Gebrauch, Änderungen oder Modifikationen am Produkt sowie für Defekte, die darauf zurückzuführen sind, dass das Produkt nicht gemäß der Anweisungen des Herstellers montiert, gewartet und verwendet wurde, aus. DIESE GARANTIE IST DIE EINIG GÜLTIGE GARANTIE FÜR UNSERE PRODUKTE UND GILT ANSTELLE VON ALLEN ANDEREN GARANTIEN UND HAFTUNGSBEDINGUNGEN, SEI ES AUSDRÜCKLICH ODER STILLSCHWEIGEND.

ES

### Garantía limitada de por vida

**Garantía para el Usuario final:** CAPITAL SAFETY garantiza al usuario final original ("Usuario final") que sus productos están libres de defectos en materiales y mano de obra bajo condiciones normales de uso y servicio. Esta garantía abarca toda la vida útil del producto, desde la fecha de compra del producto por parte del Usuario final, en estado nuevo y sin uso, a un distribuidor autorizado por CAPITAL SAFETY. Toda la responsabilidad de CAPITAL SAFETY para con el Usuario final y el recurso exclusivo del Usuario final en virtud de esta garantía, se limita a la reparación o sustitución en especie de cualquier producto defectuoso dentro de su vida útil (como CAPITAL SAFETY lo determine y estime conveniente a su sola discreción). Ninguna información oral o escrita, o información dada por CAPITAL SAFETY, sus distribuidores, directores, técnicos, agentes o empleados, creará ninguna garantía distinta o adicional, ni de alguna manera ampliará el alcance de esta garantía. CAPITAL SAFETY no acepta responsabilidad por defectos que sean resultado del abuso, mal uso, alteración o modificación del producto, ni por los defectos que se deban a una instalación, mantenimiento o utilización que no esté de acuerdo con las instrucciones del fabricante. ESTA GARANTÍA ES LA ÚNICA GARANTÍA APLICABLE A NUESTROS PRODUCTOS Y SUSTITUYE A CUALQUIER OTRA GARANTÍA O RESPONSABILIDAD, EXPRESA O IMPLÍCITA.

### Garantia vitalícia limitada

**Garantia de utilizador final:** a CAPITAL SAFETY garante ao utilizador final original ("Utilizador Final") que os seus produtos estão isentos de defeitos de materiais e de fabrico ao abrigo de uma utilização e serviço normal. Esta garantia prolonga-se pela duração da vida útil do produto desde a data de aquisição do produto pelo Utilizador Final, em condição nova e não usada, junto de um distribuidor autorizado da CAPITAL SAFETY. A responsabilidade integral da CAPITAL SAFETY perante o Utilizador Final e o recurso exclusivo do Utilizador Final ao abrigo desta garantia está limitado à reparação ou substituição de qualquer produto defeituoso no decorrer da sua vida útil (consoante apropriado e determinado exclusivamente segundo o critério exclusivo da CAPITAL SAFETY). Nenhuma informação escrita ou oral ou conselho fornecido pela CAPITAL SAFETY, seus distribuidores, directores, representantes, agentes ou funcionários irá criar garantias diferentes ou adicionais ou de qualquer forma aumentarão o âmbito desta garantia. A CAPITAL SAFETY não aceitará responsabilidade por defeitos resultantes de abuso, utilização incorrecta, alteração ou modificação, ou por defeitos do produto que resultem de um incumprimento de instalação, manutenção ou utilização do produto de acordo com as instruções do fabricante. ESTA GARANTIA É A UNICA GARANTIA APLICAVEL AOS NOSSOS PRODUTOS E EXISTE EM DETERIMENTO DE QUAISQUER OUTRAS GARANTIAS E RESPONSABILIDADES, EXPRESSAS OU IMPLÍCITAS.

SW

### Begränsad livstidsgaranti

**Garanti för slutanvändare:** CAPITAL SAFETY garanterar den ursprungliga slutanvändaren (slutanvändaren) att produkterna inte har några material- eller produktionsfel vid normal användning och service. Garantin omfattar produkternas livslängd från det datum då produkten köps av slutanvändaren i nytt och ovanvart skick från en autoriserad återförsäljare för CAPITAL SAFETY. CAPITAL SAFETY hela ansvarsskyldighet gentemot slutanvändaren och slutanvändarens enda gottgörelse inom ramen för denna garanti begränsas till reparation eller byte av trasiga produkter under deras livslängd (enligt vad CAPITAL SAFETY bestämmer och bedömer som lämpligt för ett eget gottfinnande). Inga muntliga eller skriftliga uppgifter eller råd från CAPITAL SAFETY, dess återförsäljare, chefér, tjänstemän, företärdärare eller anställda får uppträda närra andra eller ytterligare garantier eller på något sätt ändra garantins omfattning. CAPITAL SAFETY tar inget ansvar för fel som uppstår på grund av felaktig användning, missbruk, ändring eller modifiering av produkten eller fel som uppstår på grund av att produkten inte har monterats, underhållits eller använts i enlighet med tillverkarens anvisningar. DENNA GARANTI ÄR DEN ENDA GARANTI SOM GÄLLER FÖR VÅRA PRODUKTER OCH DEN ERSÄTTER ALLA ANDRA GARANTIER OCH ANSVAR, BÄDE UTTRYCKLIGA OCH UNDERFÖRSTÄDDA.

### Rajoitettu käyttöön aikainen takuu

**Takuu loppukäyttäjälle:** CAPITAL SAFETY takaa alkuperäiselle loppukäyttäjälle ("loppukäyttäjä"), ettei sen tuotteissa esinyt materiaali- tai valmistusvirheitä normaalissa käytössä ja normaalista huollettuna. Tamä takuu kattaa tuotteen normaalin käytöön siitä päivästä alkaen, kun loppukäyttäjä ostaa tuotteen uutena ja käyttäämättömäna valltuutelta CAPITAL SAFETY -jäälleenvyyjältä. CAPITAL SAFETYn ainoaa korvausvelvollisuutta loppukäyttäjää kohtaan ja loppukäyttäjän ainaa hyvitys tämän takun puitteissa rajoittuvat viallisun tuotteen korjaukseen tai vastaanottavien tuoteteiden käyttöön aikana (CAPITAL SAFETYn harkintaan mukaan määritettäväli sopivaksi katsonalla tavalla). Miltkään CAPITAL SAFETYn, sen jäleemyyjien, johtajien, toimihenkilöiden, edustajien tai työntekijöiden antamat suulliset tai kirjalliset tiedot tai ohjeet ei ovat määrätä eivätkä millään tavalla laajenna sitä. CAPITAL SAFETY ei vastaa vioista, jotka johtuvat tuotteen väärinkäytöstä tai muuttamisesta, eikä vioista, jotka johtuvat tuotteen asennusta, kunnossapitoa ja käyttöä koskevien valmistajan ohjeiden lainimyönnistä. TÄMÄ TAKUU ON AINOAA TUOTTEISEMME SOVELLETTAVAA TAKUUJA, JA SE KORVAA KAikki MUUT NIMENOMAISET JA OLETETUT TAKUUT JA KORVAUSVELVOLLISUUDET.

NO

### Begrenset livstidsgaranti

**Garanti for sluttbruker:** CAPITAL SAFETY garanterer den opprinnelige sluttbrukeren ("Sluttbrukeren") at materialene og håndverket som gjikk med i tilvirkingen av produktene er uten defekter i sammenheng med vanlig bruk. Garantien gjelder for produktets levetid fra datoen Sluttbrukeren kjøper produktet i ny og ubrukt stand fra en autorisert leverandør av CAPITAL SAFETY. CAPITAL SAFETYs fulle og hele ansvar overfor Sluttbrukeren og Sluttbrukerenens eneste rettighet under denne garantien er begrenset til reparasjon og erstattning i natura for alle defekte produkter innen sin levetid (som CAPITAL SAFETY anslår og ansør som passende etter sitt eget forgodtbeffinnende). Verken muntlig eller skriftlig rådgivning fra CAPITAL SAFETY eller dets leverandører, styremedlemmer, ledere, agenter eller ansatte skal opprette ulike eller ytterligere garantier, eller på noen måte utvide omfanget til denne garantien. CAPITAL SAFETY tar ikke ansvar for defekter som er resultatet av produktmisbruk, misbruk, endring eller modifisering, eller defekter som skyldes montering, vedlikehold eller bruk som ikke samsvarer med produsentens anvisninger. DENNE GARANTIEN ER DEN ENESTE GARANTIEN SOM GJELDER FOR VÅRE PRODUKTER. DEN GJELDER I STEDET FOR ALLE ANDRE GARANTIER OG ALT ANNEN ANSVAR, BÅDE UTTRYKT OG UNDERFORSTÅTT.

### Begrænset levetidsgaranti

**Slutbrugergaranti:** CAPITAL SAFETY garanterer over for slutbrugeren ("Slutbruger"), at virksomhedens produkter er fri for defekter i materialer og udførelse, når de anvendes under normale forhold. Denne garanti gælder i produkternes levetid fra den dato, Slutbruger køber produktet i ny og ubrugt stand fra en af CAPITAL SAFETY autoriseret distributør. CAPITAL SAFETYs fulde ansvar over for Slutbrugeren samt Slutbrugers eksklusive retsmiddel begrænser sig i henhold til nærværende garanti til reparation eller erstattning af defekte produkter inden for deres levetid (udelukkende efter CAPITAL SAFETYs skøn og vurdering). Ingen mundtlige eller skriftlige oplysninger eller råd fra CAPITAL SAFETY, virksomhedens distributører, direktører, funktionærer, repræsentanter eller medarbejdere kan udgøre en anden eller yderligere garanti, eller på nogen måde udvide nærværende garanti. CAPITAL SAFETY påtager sig intet ansvar for defekter, der er forårsaget af misbrug, forkert brug, ændringer eller modifikationer af produktet, eller for defekter, der skyldes installation, vedligeholdelse eller bruk af produktet, der er i modstrid med producentens anvisninger. DENNE GARANTI ER DEN ENESTE GARANTI, DER ER GÆLDENDE FOR VORES PRODUNKTER, OG DEN TRÆDER I STEDET FOR ALLE ANDRE GARANTIER, UDTRYKKELIGE ELLER UNDERFORSTÅDE.

SK

### Obmedená doživotná záruka

**Záruka pre koncového používateľa:** Spoločnosť CAPITAL SAFETY zaručuje pôvodnému koncovému používateľovi (ďalej len „Koncový používateľ“), že jeho výrobky sú bez chýb materiálu a vyuhotovenia pri bežnom používaní a servise. Táto záruka platí po celom dobu životnosti výrobku, od dátumu, kedy bol výrobok zakúpený Koncovým používateľom, v novom a nepoužívanom stave, od autorizovaného distribútora spoločnosti CAPITAL SAFETY. Celkové ručenie spoločnosti CAPITAL SAFETY voči Koncovému používateľovi a výhradným nápravným prostriedkom podľa tejto záruky sa obmedzuje na fyzickú opravu alebo výmenu každého chybnejšieho výrobku po dobu jeho životnosti (ako spoločnosť CAPITAL SAFETY určí podľa svojich vlastného uváženia a kék považuje za primerané). Žiadna ďalšia alebo písomná informácia ani rady poskytnuté spoločnosťou CAPITAL SAFETY, jej distribútormi, štatutárnymi predstaviteľmi, riadiťelmi, zástupcami alebo zamestnancami nezadávajú žiadne iné ďalšie záruky, ani akýmkoľvek spôsobom nerozšírujú rozsah tejto záruky. Spoločnosť CAPITAL SAFETY neručí za chyby spôsobené nevhodným, neodborným používaním výrobku, jeho úpravami alebo zmenami, ani za chyby, spôsobené nesprávnou inštaláciou, údržbou alebo používaním výrobku v rozporu s pokynmi výrobcu. TÁTO ZÁRUKA JE JEDINÁ ZÁRUKA NA NAŠE VÝROBKY A NAHRÁDZA VSETKY OSTÁTNÉ ZÁRUKY A ZODPOVEDNOSTI, ČI UŽ POTVRDENÉ SLOVNE ALEBO IMPLICITNE.

### BEPERKTE LEVENSLANGE GARANTIE

**Garantie voor eindgebruiker:** CAPITAL SAFETY garandeert de oorspronkelijke eindgebruiker ("eindgebruiker") dat zijn producten bij normaal gebruik en service vrij zijn van defecten in materialen en vakkmanschap. Deze garantie strekt zich uit tot de levensduur van het product vanaf de datum waarop het product in nieuwstaat en in ongebruikte toestand door de eindgebruiker wordt aangeschaft bij een door CAPITAL SAFETY geautoriseerde distributeur. De gehele aansprakelijkheid van CAPITAL SAFETY jegens de eindgebruiker en de enige remedie die de eindgebruiker ter beschikking staat onder deze garantie, is beperkt tot het repareren of vervangen van het defecte product binnen zijn levensduur (uitsluitend zoals CAPITAL SAFETY naar eigen goeddunken bepaalt en van toepassing acht). Geen enkele informatie of geen enkel advies, mondeling of schriftelijk, verstrekt door CAPITAL SAFETY, diens distributeurs, directeuren, functionarissen, agenten of medewerkers creëert andere of aanvullende garanties en vergroot in geen enkel geval de reikwijdte van deze garantie. CAPITAL SAFETY neemt geen aansprakelijkheid voor defecten die het gevolg zijn van misbruik, verkeerd gebruik, verandering of aanpassing van het product, of voor defecten die het gevolg zijn van het niet opvolgen van de instructies van de fabrikant bij het installeren, onderhouden of gebruiken van het product. DEZE GARANTIE IS DE ENIGE GARANTIE DIE VAN TOEPASSING IS OP ONZE PRODUCENTEN EN TREEDT NIET IN DE PLAATS VAN ANDERE UITDRUKKELIJKE OF STILZWIJGENDE GARANTIES EN AANSPRAKELIJKHEDEN.

FR

DE

PT

DA

NL



Trusted Quality Fall Protection

CSG USA & Latin America  
3833 SALA Way  
Red Wing, MN 55066-5005  
Toll Free: 800.328.6146  
Phone: 651.388.8282  
Fax: 651.388.5065  
[solutions@capitalsafety.com](mailto:solutions@capitalsafety.com)

CSG EMEA  
(Europe, Middle East, Africa)  
Le Broc Center  
Z.I. 1ère Avenue  
5600 M B.P. 15 06511  
Carros  
Le Broc Cedex  
France  
Phone: + 33 4 97 10 00 10  
Fax: + 33 4 93 08 79 70  
[information@capitalsafety.com](mailto:information@capitalsafety.com)

CSG Canada  
260 Export Boulevard  
Mississauga, ON L5S 1Y9  
Phone: 905.795.9333  
Toll-Free: 800.387.7484  
Fax: 888.387.7484  
[info.ca@capitalsafety.com](mailto:info.ca@capitalsafety.com)

CSG Australia & New Zealand  
95 Derby Street  
Silverwater  
Sydney NSW 2128  
AUSTRALIA  
Phone: +(61) 2 8753 7600  
Toll-Free : 1 800 245 002 (AUS)  
Toll-Free : 0800 212 505 (NZ)  
Fax: +(61) 2 87853 7603  
[sales@capitalsafety.com.au](mailto:sales@capitalsafety.com.au)

CSG Northern Europe  
5a Merse Road  
North Moons, Moat  
Reditch, Worcestershire, UK  
B98 9HL  
Phone: + 44 (0)1527 548 000  
Fax: + 44 (0)1527 591 000  
[csgne@capitalsafety.com](mailto:csgne@capitalsafety.com)

CSG Asia  
*Singapore:*  
16S, Enterprise Road  
Singapore 627666  
Phone: +65 - 65587758  
Fax: +65 - 65587058  
[inquiry@capitalsafety.com](mailto:inquiry@capitalsafety.com)  
  
*Shanghai:*  
Rm 1406, China Venturetech Plaza  
819 Nan Jing Xi Rd,  
Shanghai 200041, P R China  
Phone: +86 21 62539050  
Fax: +86 21 62539060

[www.capitalsafety.com](http://www.capitalsafety.com)

