



# 3M™ DIN C-FORM & R-FORM SOCKET, DIN 41612 SERIES

VERTICAL, RIGHT ANGLE, SOLDER TAIL OR PRESS-FIT TERMINATION

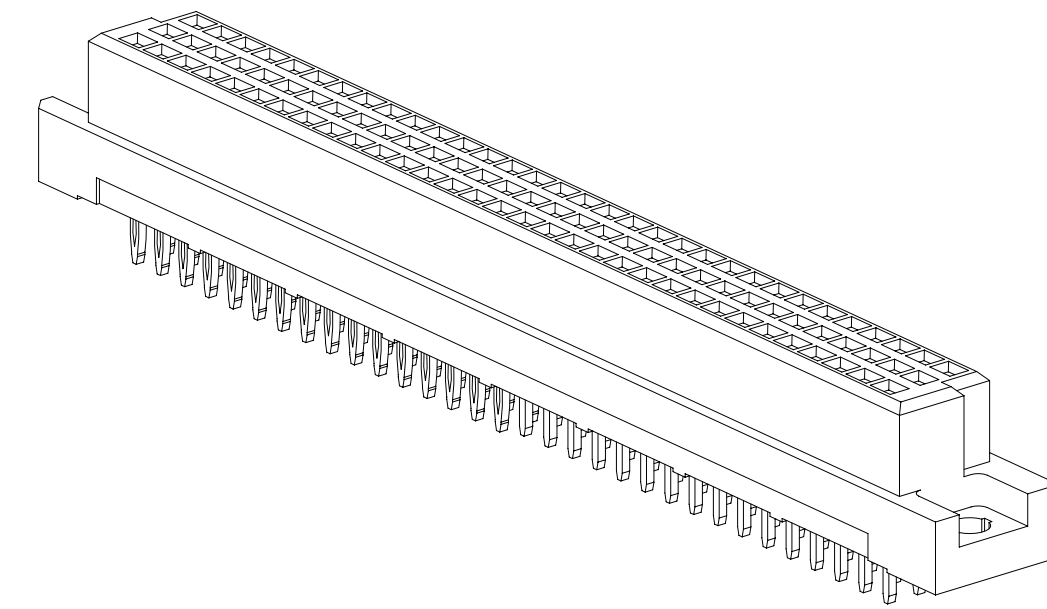

DIN-XXXCSX-XXX  
VERTICAL VERSION

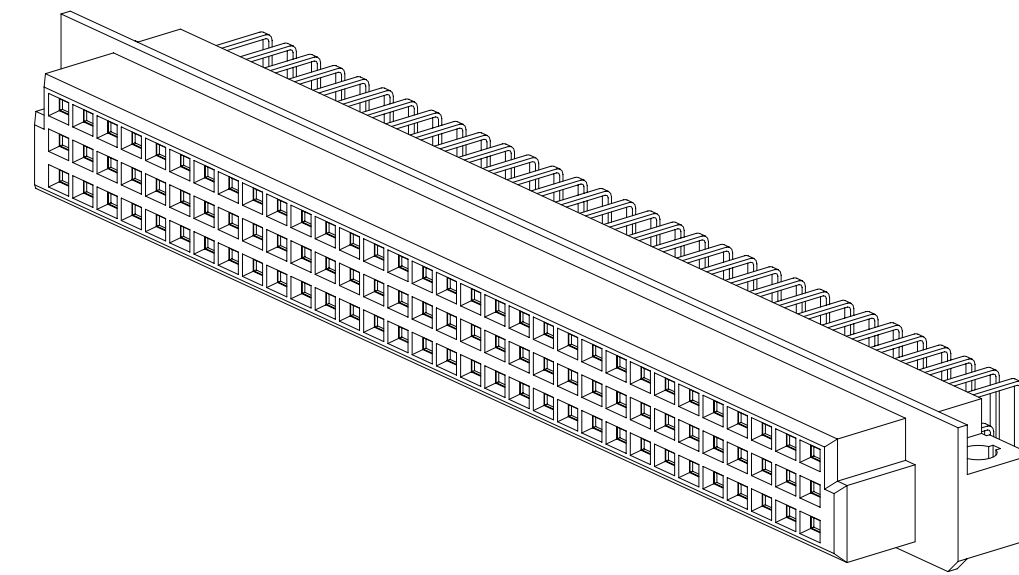

DIN-XXXRSX-XXX  
RIGHT ANGLE VERSION

## 2 PHYSICAL :

INSULATOR: GLASS FILLED POLYESTER (PBT)  
 MATERIAL: UL94V-0  
 FLAMMABILITY: UL94V-0  
 COLOR: GRAY  
 CONTACT: COPPER ALLOY  
 MATERIAL: COPPER ALLOY  
 PLATING: 50μ" MIN. NICKEL  
 UNDER PLATING: SEE ORDERING INFORMATION  
 WIPING AREA: SEE ORDERING INFORMATION  
 TERMINATION AREA: SEE ORDERING INFORMATION

## 2 ELECTRICAL :

CURRENT RATING: 3.0A AT 30°C T-RISE ABOVE AMBIENT  
 CONTACT RESISTANCE: ≤20mΩ  
 INSULATION RESISTANCE: ≥1,000 MΩ, 100 V<sub>DC</sub>  
 WITHSTANDING VOLTAGE: 1,000V<sub>AC</sub> FOR 1 MINUTE

## 2 ENVIRONMENTAL :

TEMPERATURE RATING: -55°C TO 125°C  
 PROCESS TEMPERATURE RATING: MAX. INSULATOR TEMPERATURE 191°C  
 (SOLDER WAVE PROCESS ONLY)

- NOTES
- REGULATORY INFORMATION:  
VISIT 3M.com/regs OR CONTACT YOUR 3M REPRESENTATIVE TO FIND THE RoHS COMPLIANCE STATUS OF THE 3M PART YOU ARE INTERESTED IN.
  - IN THE EVENT OF CONFLICT BETWEEN THIS DATA AND THAT CONTAINED IN THE PRODUCT SPECIFICATION, THE PRODUCT SPECIFICATION TAKES PRECEDENT.

3M ELECTRONICS MATERIALS SOLUTIONS DIVISION  
 INTERCONNECT SOLUTIONS  
<http://www.3mconnectors.com>

3M IS A TRADEMARK OF 3M COMPANY.  
 FOR TECHNICAL, SALES OR ORDERING  
 INFORMATION CALL 800-225-5373

MM [ INCH ]			
TOLERANCE - UNLESS NOTED			
	X.	.X	.XX
MM	±.50	±.25	±.15
[ INCH ]	±.020	±.010	±.006
[ ] = DIM. FOR REFERENCE ONLY			

DIMENSIONS: MM [ INCHES ]  
 [ INCHES ] IS REF. ONLY

  
 UL FILE NO: E68080

REV	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
B	73823	MAY 30, 2017 REMOVE PLATING SH & FJ	JNC	WL
A	72454	FEB 24, 2017 PRODUCTION RELEASE	JNC	WL

DESIGN REFERENCE	NEXT ASSEMBLY

DRW CODES	DIVISION CODE	EMSD

DO NOT SCALE DRAWING	SCALE	TOLERANCES EXCEPT AS NOTED
	2/1	

THIRD ANGLE PROJECTION	INCHES	MILLIMETERS

MAX SURFACE ROUGHNESS	INCHES	MILLIMETERS

CAGE NUMBER	SIZE	DRAWING NO.	REV.
D		78-5100-2670-7	B


  

MODEL	DEF	YES	NO	SHT	OF
				1	4

78-5100-2670-7  
DRAWING NUMBER  
REV B  
Standard Time5/30/2017UTC Offset

# 3M™ DIN C-FORM & R-FORM SOCKET, DIN 41612 SERIES

VERTICAL, RIGHT ANGLE, SOLDER TAIL OR PRESS-FIT TERMINATION

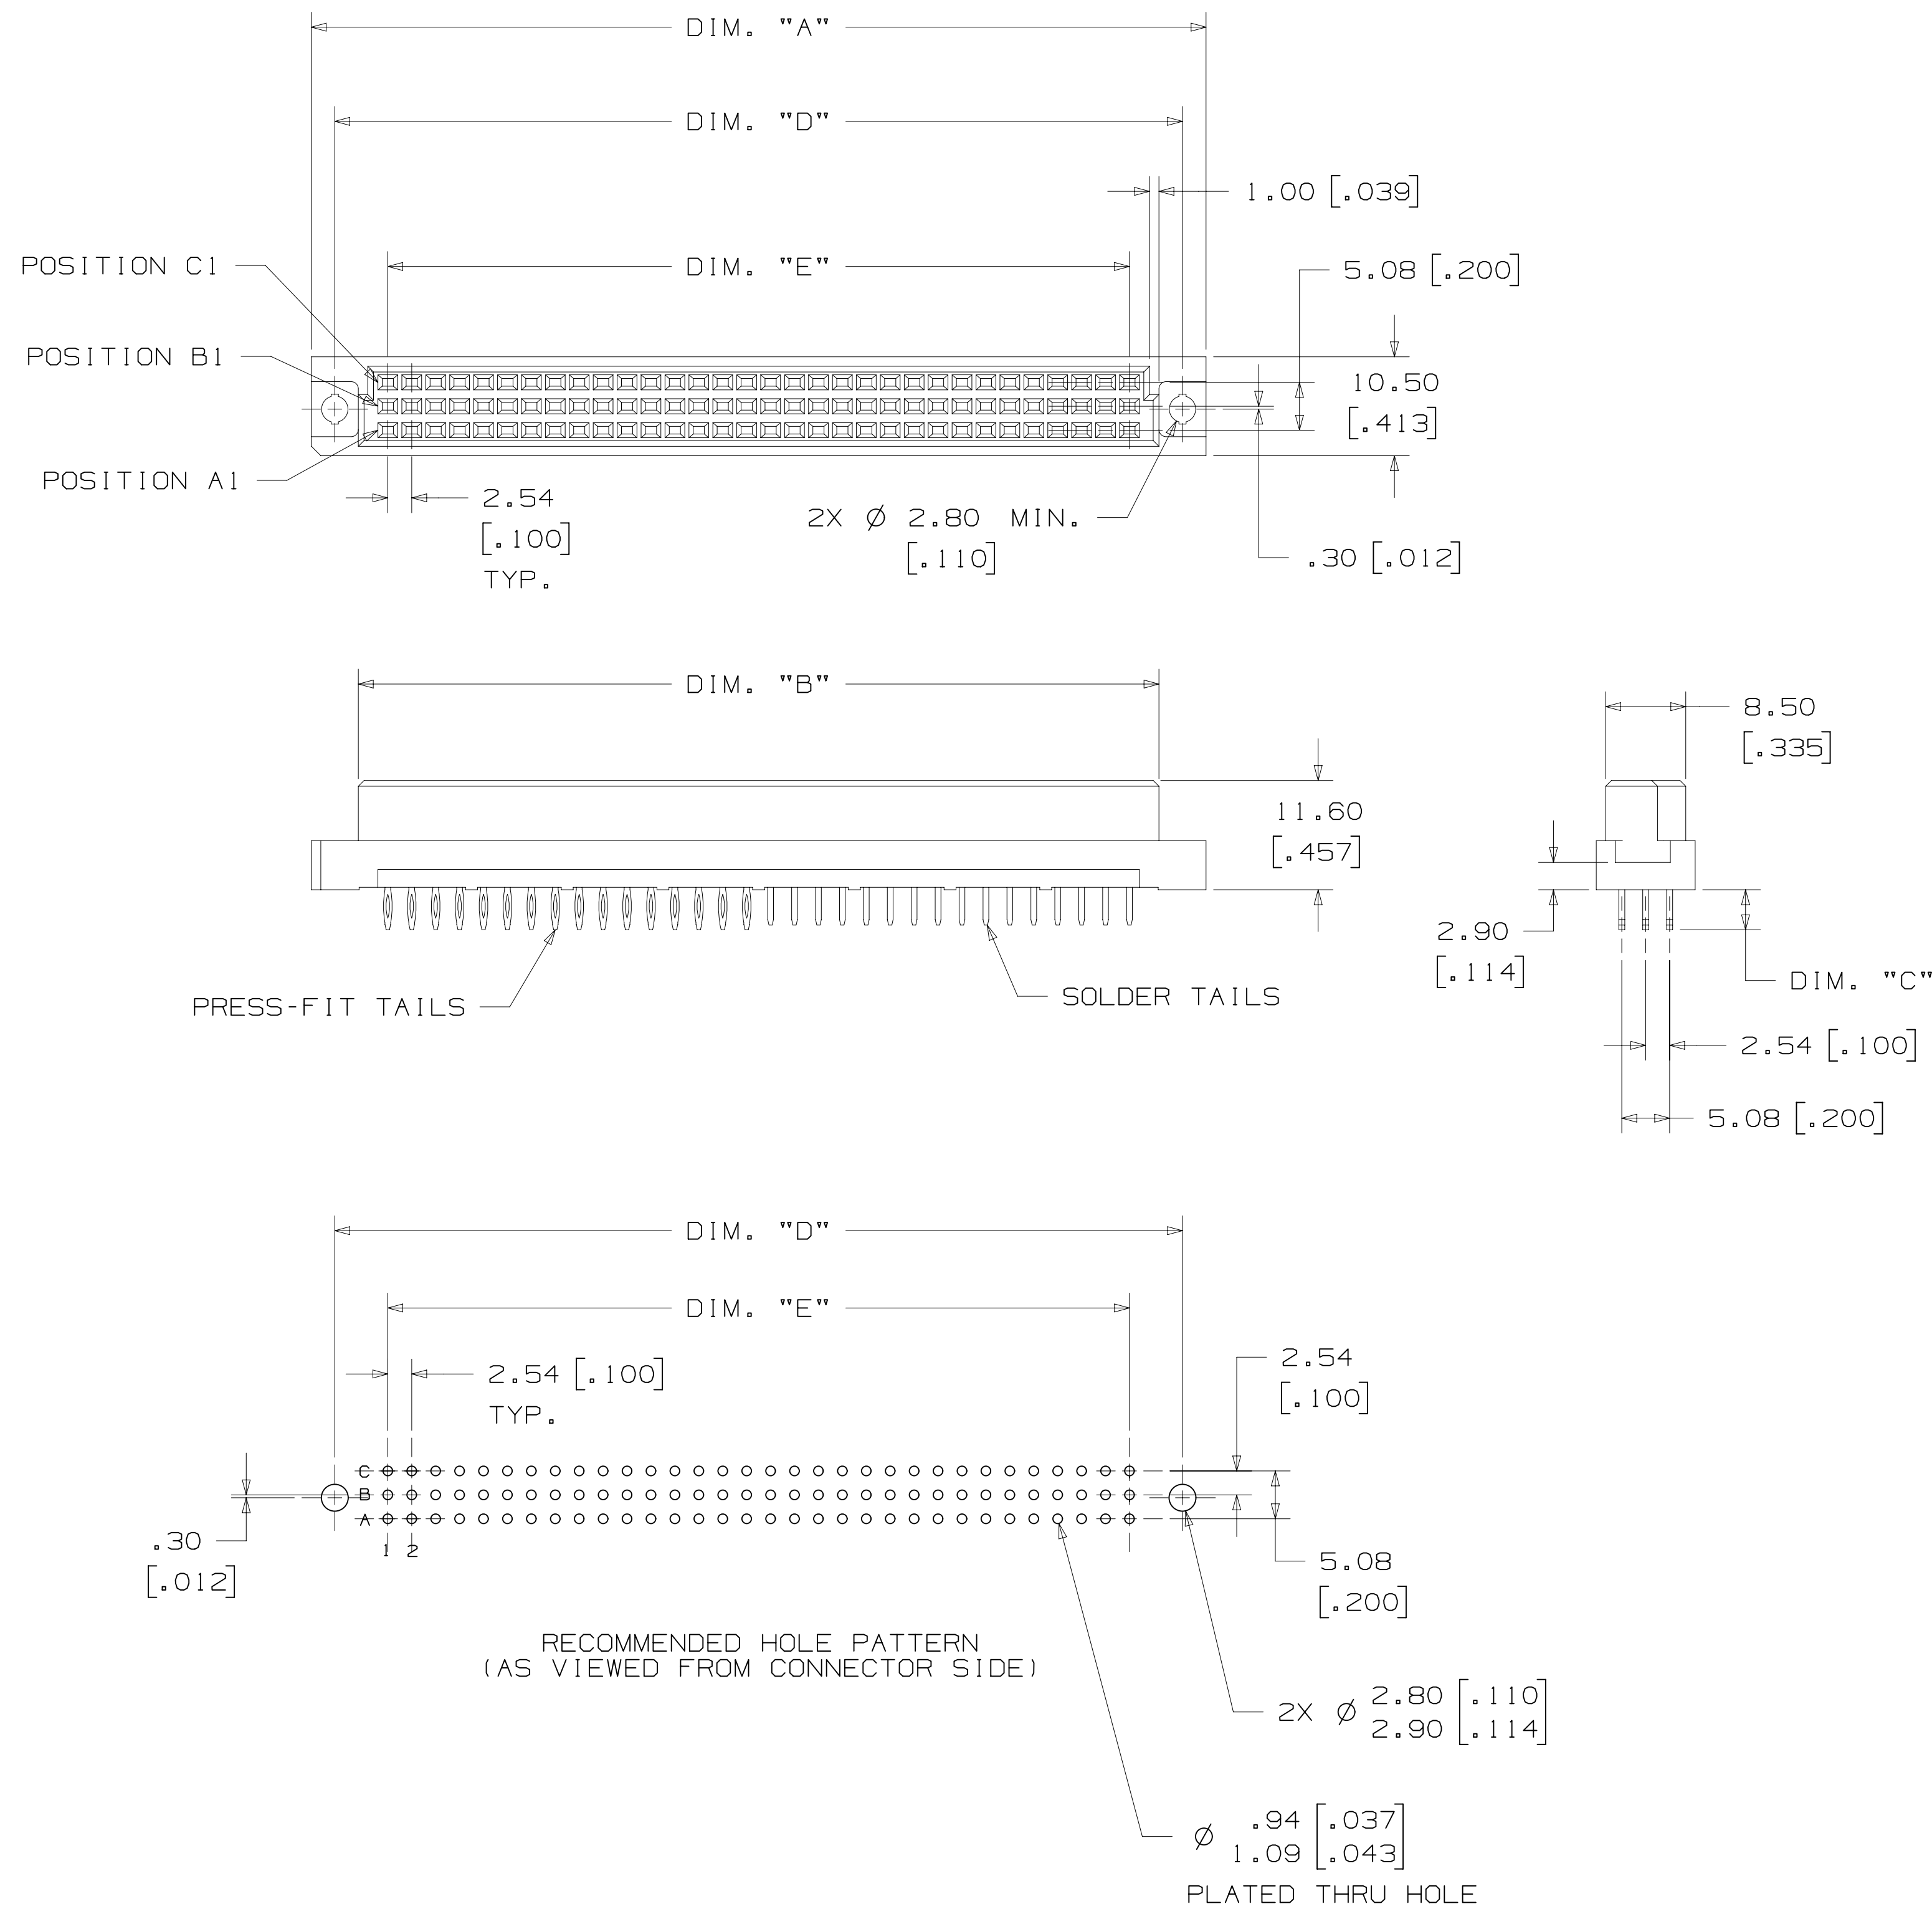

CONTACT QTY.	PART NUMBER	DIM. "A"	DIM. "B"	DIM. "D"	DIM. "E"	CONTACT QTY.
16	DIN-016CSA-XXX-XXXX	54.40 [ 2.142 ]	44.40 [ 1.748 ]	50.00 [ 1.969 ]	38.10 [ 1.500 ]	16
32	DIN-032CSB-XXX-XXXX	54.40 [ 2.142 ]	44.40 [ 1.748 ]	50.00 [ 1.969 ]	38.10 [ 1.500 ]	32
48	DIN-048CSC-XXX-XXXX	54.40 [ 2.142 ]	44.40 [ 1.748 ]	50.00 [ 1.969 ]	38.10 [ 1.500 ]	48
32	DIN-032CSD-XXX-XXXX	54.40 [ 2.142 ]	44.40 [ 1.748 ]	50.00 [ 1.969 ]	38.10 [ 1.500 ]	32
16	DIN-016CSE-XXX-XXXX	54.40 [ 2.142 ]	44.40 [ 1.748 ]	50.00 [ 1.969 ]	38.10 [ 1.500 ]	16
32	DIN-032CSA-XXX-XXXX	95.00 [ 3.740 ]	85.00 [ 3.346 ]	90.00 [ 3.543 ]	78.74 [ 3.100 ]	32
64	DIN-064CSB-XXX-XXXX	95.00 [ 3.740 ]	85.00 [ 3.346 ]	90.00 [ 3.543 ]	78.74 [ 3.100 ]	64
96	DIN-096CSC-XXX-XXXX	95.00 [ 3.740 ]	85.00 [ 3.346 ]	90.00 [ 3.543 ]	78.74 [ 3.100 ]	96
64	DIN-064CSD-XXX-XXXX	95.00 [ 3.740 ]	85.00 [ 3.346 ]	90.00 [ 3.543 ]	78.74 [ 3.100 ]	64
32	DIN-032CSE-XXX-XXXX	95.00 [ 3.740 ]	85.00 [ 3.346 ]	90.00 [ 3.543 ]	78.74 [ 3.100 ]	32

## ORDERING INFORMATION C-FORM VERSION

DIN-XXXCSX-XXX-XX

CONTACT QUANTITY:  
(SEE TABLE 1)

- A = A ROW ONLY (SEE NOTE)
- B = ROWS A & C FILLED
- C = ROWS A, B & C FILLED
- D = ROWS A & B FILLED
- E = B ROW ONLY (SEE NOTE)


PLATING:

- KR = 30-40 $\mu$ " GOLD ON CONTACT AREA  
120-200 $\mu$ " MATTE TIN ON TERMINAL
- HM = 3 $\mu$ " GOLD ON CONTACT AREA, 7 $\mu$ " MIN. PdNi  
120-200 $\mu$ " MATTE TIN ON TERMINAL
- KV = 30 $\mu$ " GOLD ON CONTACT AREA, 1-3 $\mu$ " GOLD  
ON BOARD TERMINATION

TERMINATION OPTIONS:  
SEE TABLE 2

- NOTE:
- 1) A AND E OPTIONS ARE CURRENTLY NOT COVERED IN UL FILE NO. E68080.
  - 2) MATES WITH C-FORM AND R-FORM PLUGS.

SOLDER TERMINATION OPTION NO.	DIM. "C"	COMMENTS
R1L	3.75 [ .148 ]	WITH RETENTION CLIP
R3L	2.29 [ .090 ]	WITH RETENTION CLIP
S1L	3.75 [ .148 ]	NO RETENTION CLIP
S3L	2.29 [ .090 ]	NO RETENTION CLIP
W	14.70 [ .579 ]	NO RETENTION CLIP
PRESS-FIT TERMINATION OPTION NO.	DIM. "C"	COMMENTS
PS	5.99 [ .236 ]	
PSL	4.25 [ .167 ]	
PW1	12.90 [ .508 ]	

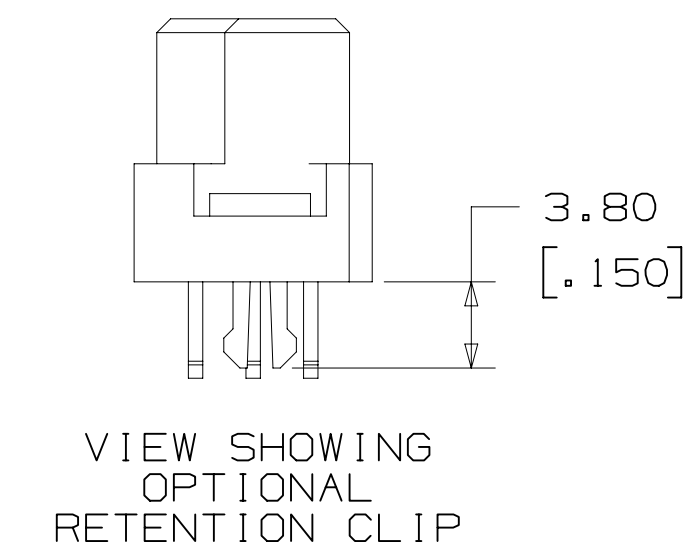

REV	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
B	73823	MAY 30, 2017 REMOVE PLATING SH & FJ	JNC	WL
A	72454	FEB 24, 2017 PRODUCTION RELEASE	JNC	WL
CHKD	DATE	DATE	DATE	DATE
CASTIGLIONE	FEB 20, 2017	MFG		
DATE	DATE	DATE	DATE	DATE
W. LEE	FEB 20, 2017			

DESIGN REFERENCE	NEXT ASSEMBLY
DO NOT SCALE DRAWING	SCALE 2/1
THIRD ANGLE PROJECTION	TOLERANCES EXCEPT AS NOTED
INTERPRET PER ASME Y14.5 - 2009	INCHES
MAX SURFACE ROUGHNESS	MILLIMETERS
MARKED ONLY	0
	.00
	.000
	.0000
	0
	.00
	.00
	.000
	.000

TITLE	DIN C & R-FORM SKT, RA, VERT, SOLDER TAIL OR PRESS-FIT
CAGE NUMBER	D 78-5100-2670-7
SIZE	B
DRAWING NO.	78-5100-2670-7
REV.	B
MODEL	
DET	IS1S
YES	NO
SHT	2 OF 4

# 3M™ DIN C-FORM & R-FORM SOCKET, DIN 41612 SERIES

VERTICAL, RIGHT ANGLE, SOLDER TAIL OR PRESS-FIT TERMINATION




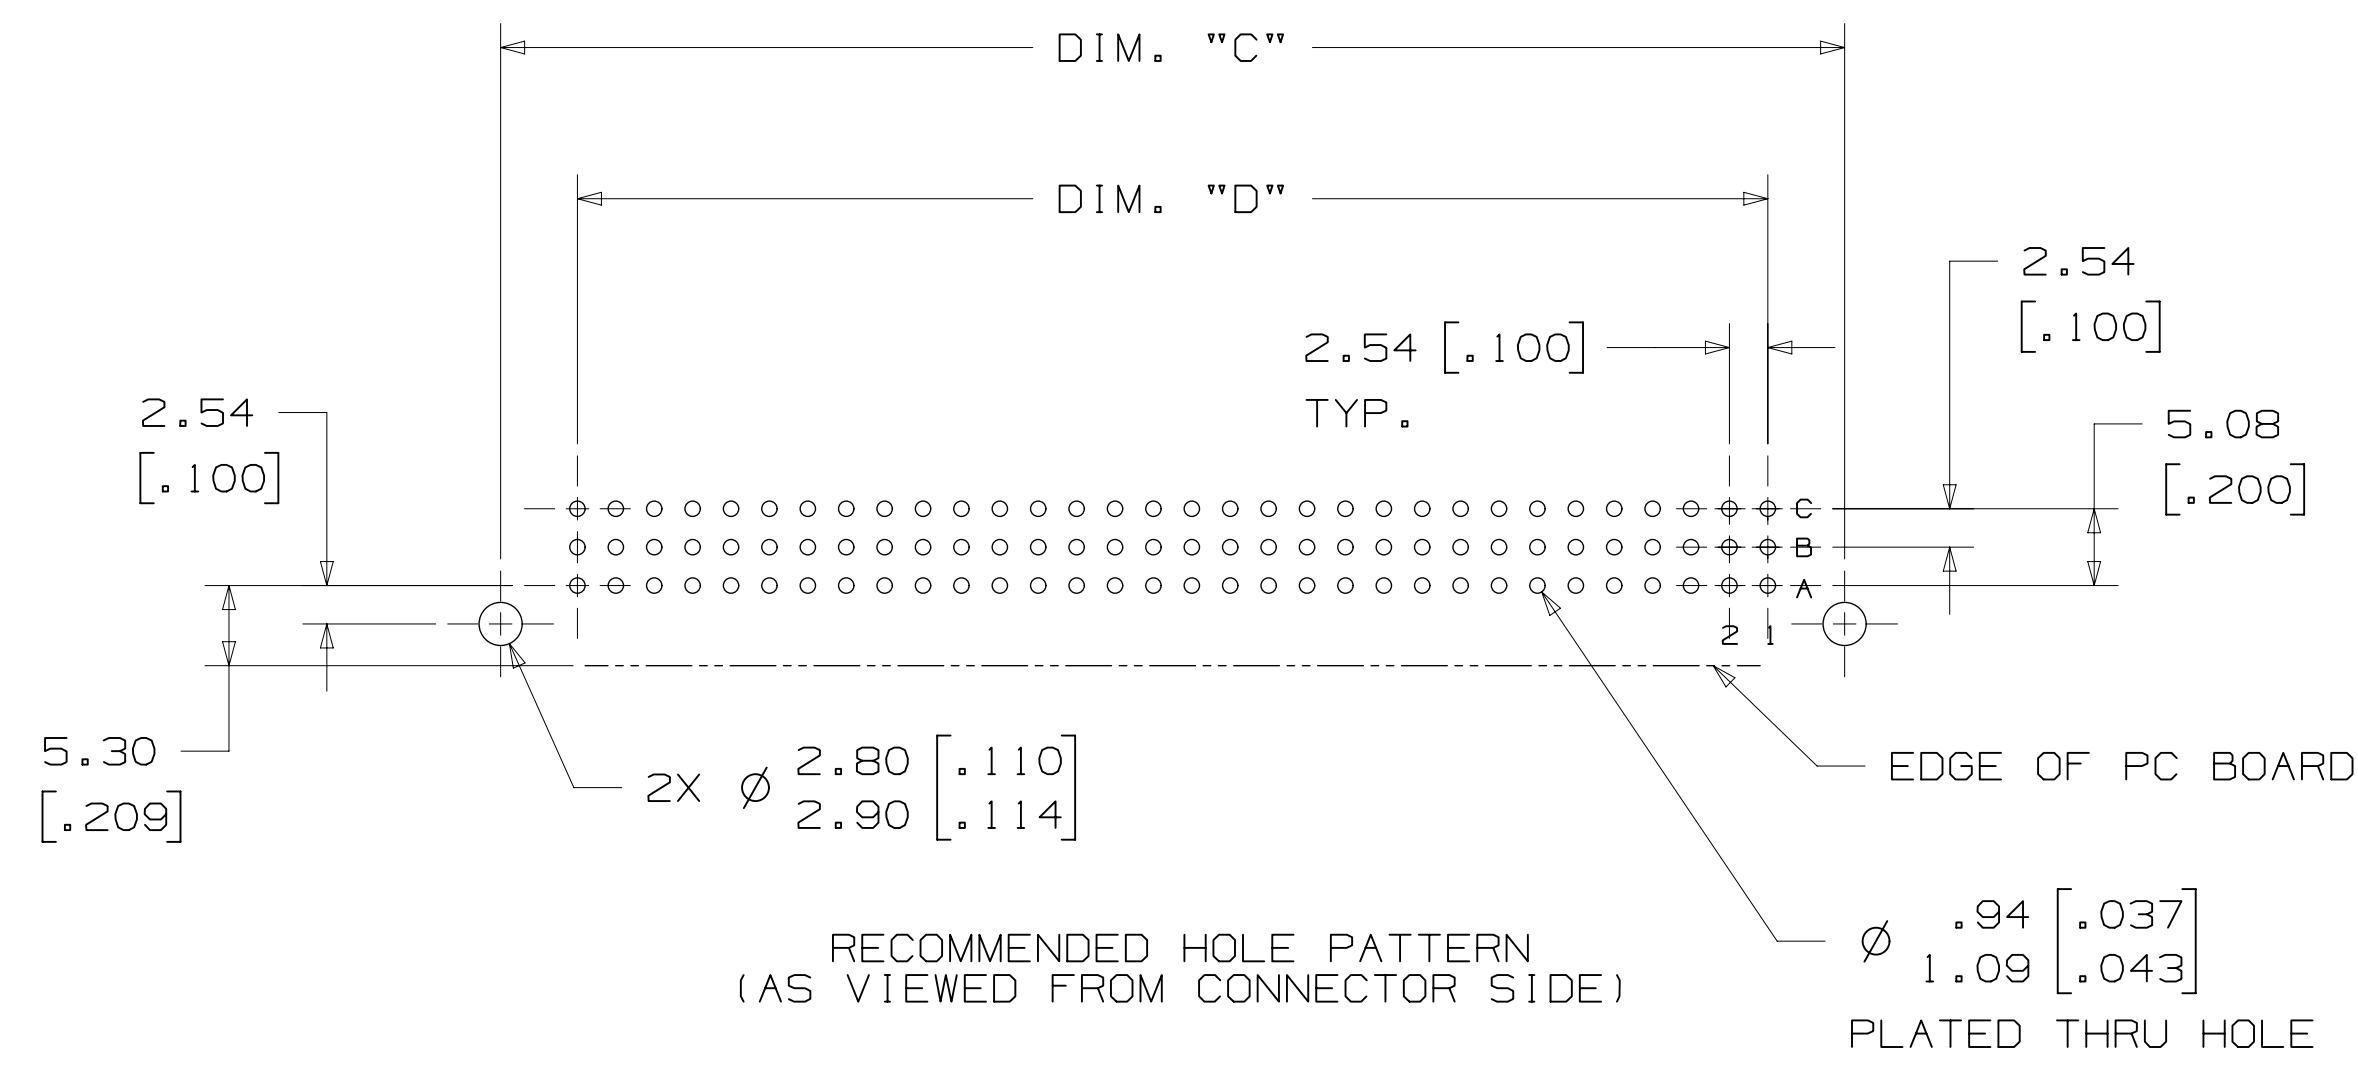


TABLE 1								
CONTACT QTY.	PART NUMBER	DIM. "A"	DIM. "B"	DIM. "C"	DIM. "D"	DIM. "E"	DIM. "F"	CONTACT QTY.
16	DIN-016RSA-XXX-XXXX	53.40 [2.102]	44.40 [1.748]	48.26 [1.900]	38.10 [1.500]	Ø2.60 [.102]	.25 [.010]	16
32	DIN-032RSB-XXX-XXXX	53.40 [2.102]	44.40 [1.748]	48.26 [1.900]	38.10 [1.500]	Ø2.60 [.102]	.25 [.010]	32
48	DIN-048RSC-XXX-XXXX	53.40 [2.102]	44.40 [1.748]	48.26 [1.900]	38.10 [1.500]	Ø2.60 [.102]	.25 [.010]	48
32	DIN-032RSD-XXX-XXXX	53.40 [2.102]	44.40 [1.748]	48.26 [1.900]	38.10 [1.500]	Ø2.60 [.102]	.25 [.010]	32
16	DIN-016RSE-XXX-XXXX	53.40 [2.102]	44.40 [1.748]	48.26 [1.900]	38.10 [1.500]	Ø2.60 [.102]	.25 [.010]	16
32	DIN-032RSA-XXX-XXXX	94.00 [3.701]	85.00 [3.346]	88.90 [3.500]	78.74 [3.100]	Ø2.60 [.102]	.25 [.010]	32
64	DIN-064RSB-XXX-XXXX	94.00 [3.701]	85.00 [3.346]	88.90 [3.500]	78.74 [3.100]	Ø2.60 [.102]	.25 [.010]	64
96	DIN-096RSC-XXX-XXXX	94.00 [3.701]	85.00 [3.346]	88.90 [3.500]	78.74 [3.100]	Ø2.60 [.102]	.25 [.010]	96
64	DIN-064RSD-XXX-XXXX	94.00 [3.701]	85.00 [3.346]	88.90 [3.500]	78.74 [3.100]	Ø2.60 [.102]	.25 [.010]	64
32	DIN-032RSE-XXX-XXXX	94.00 [3.701]	85.00 [3.346]	88.90 [3.500]	78.74 [3.100]	Ø2.60 [.102]	.25 [.010]	32
40	DIN-040RSA-XXX-XXXX	114.32 [4.501]	105.32 [4.146]	109.22 [4.300]	99.06 [3.900]	Ø2.80 [.110]	.60 [.024]	40
80	DIN-080RSB-XXX-XXXX	114.32 [4.501]	105.32 [4.146]	109.22 [4.300]	99.06 [3.900]	Ø2.80 [.110]	.60 [.024]	80
120	DIN-120RSC-XXX-XXXX	114.32 [4.501]	105.32 [4.146]	109.22 [4.300]	99.06 [3.900]	Ø2.80 [.110]	.60 [.024]	120
80	DIN-080RSD-XXX-XXXX	114.32 [4.501]	105.32 [4.146]	109.22 [4.300]	99.06 [3.900]	Ø2.80 [.110]	.60 [.024]	80
40	DIN-040RSE-XXX-XXXX	114.32 [4.501]	105.32 [4.146]	109.22 [4.300]	99.06 [3.900]	Ø2.80 [.110]	.60 [.024]	40

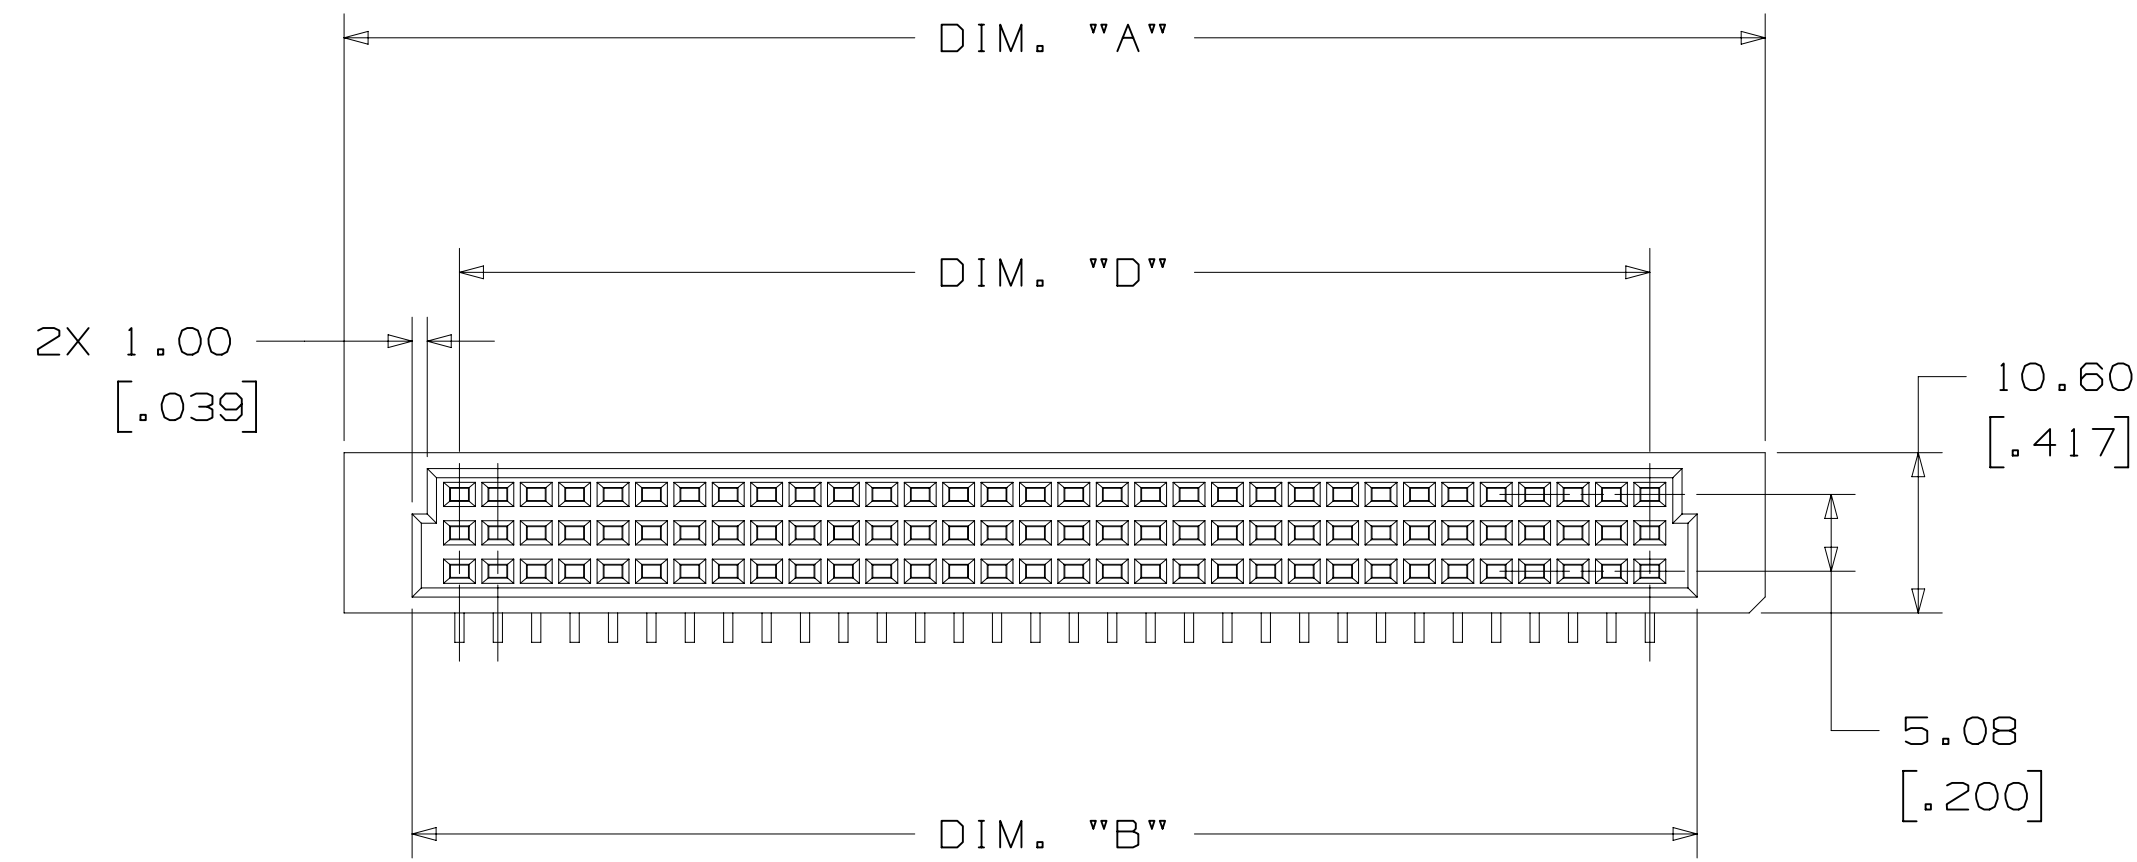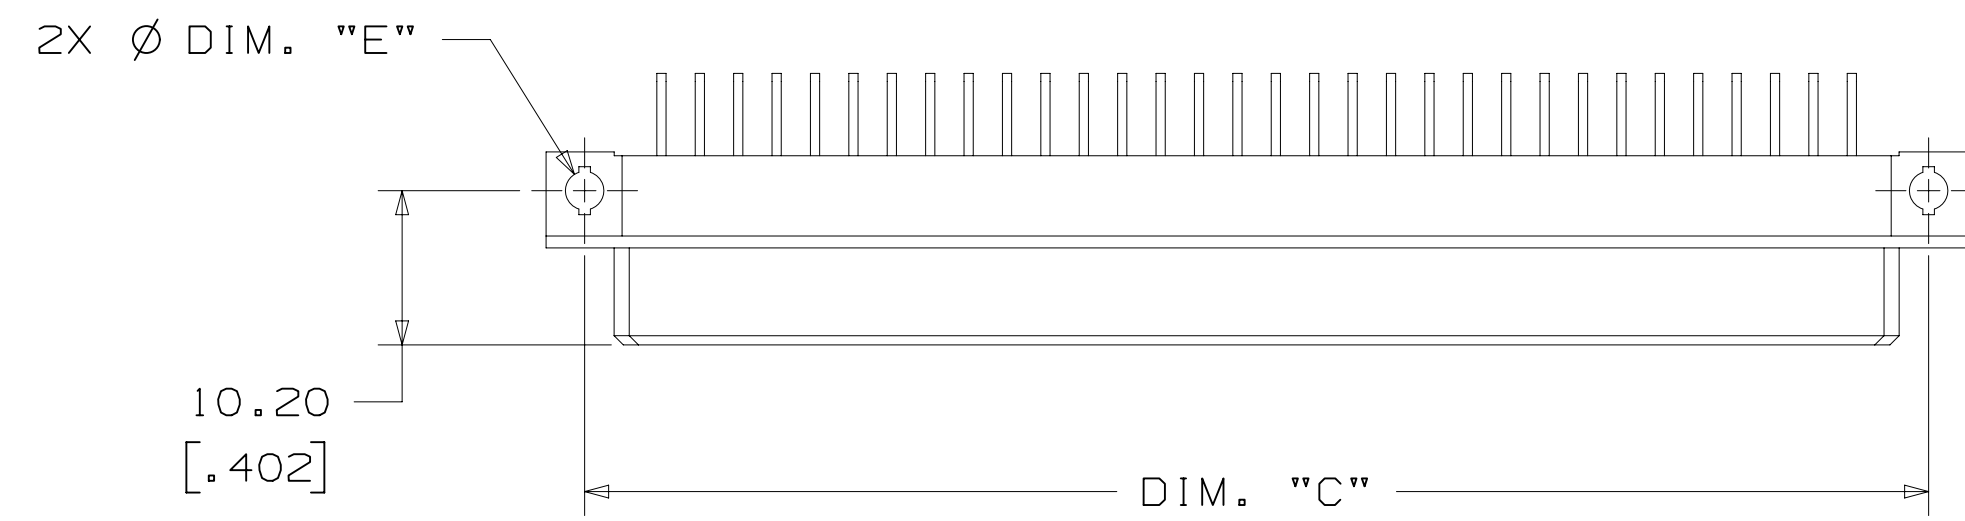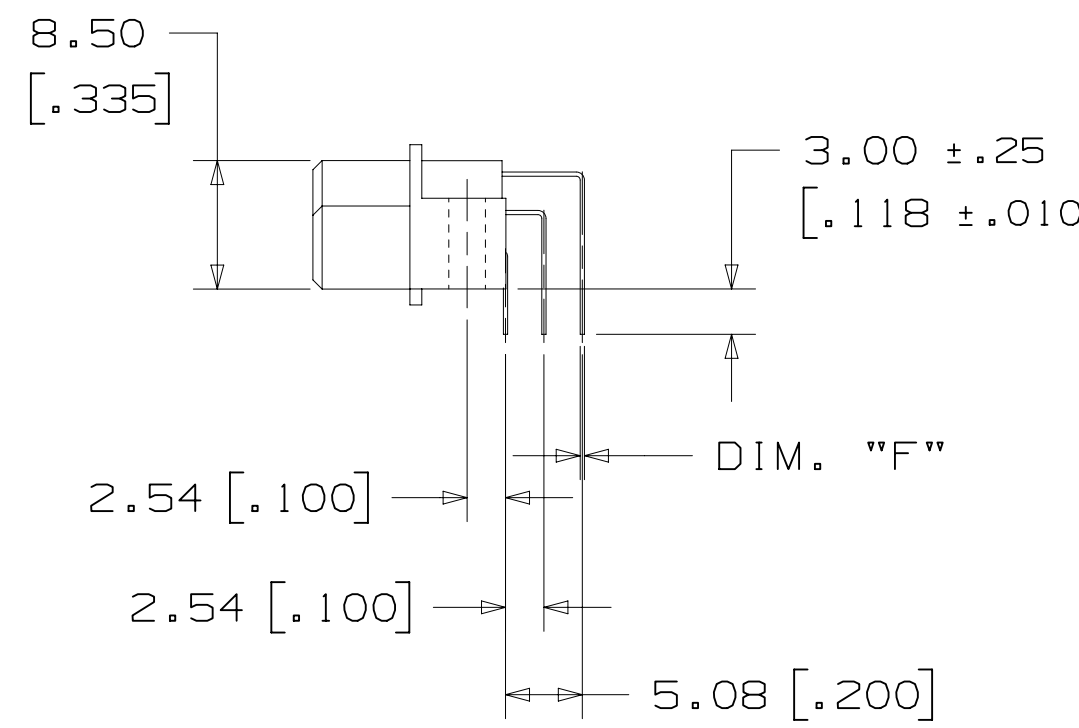

## ORDERING INFORMATION R-FORM VERSION

DIN-XXXRSX-XXX-XX

CONTACT QUANTITY:  
(SEE TABLE 1)

- A = A ROW ONLY (SEE NOTE)
- B = ROWS A & C FILLED
- C = ROWS A, B & C FILLED
- D = ROWS A & B FILLED
- E = B ROW ONLY (SEE NOTE)

TERMINATION OPTIONS:


- SR1 = 3.00 [.118]
- RR1L = 3.00 [.118] WITH 'B' RETENTION CLIPS

PLATING:


- KR = 30-40µ" GOLD ON CONTACT AREA
- 120-200µ" MATTE TIN ON TERMINAL
- HM = 3µ" GOLD ON CONTACT AREA, 7µ" MIN. PdNi
- 120-200µ" MATTE TIN ON TERMINAL

### NOTE:

- 1) A AND E OPTIONS ARE CURRENTLY NOT COVERED IN UL FILE NO. E68080.
- 2) MATES WITH C-FORM AND R-FORM PLUGS.



SR1  
WITHOUT OPTIONAL  
RETENTION CLIPS

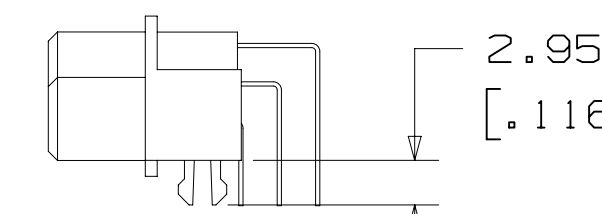

RR1L  
WITH "B" OPTIONAL RETENTION  
CLIPS FOR .062 PCB THICKNESS

DESIGN REFERENCE	NEXT ASSEMBLY	REV	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
		B	73823	MAY 30, 2017 REMOVE PLATING SH & FJ	JNC	WL
		A	72454	FEB 24, 2017 PRODUCTION RELEASE	JNC	WL
DO NOT SCALE DRAWING	SCALE 2/1	DRFT	CHKD	DATE	DATE	DATE
			CASTIGLIONE	FEB 20, 2017	W. LEE	FEB 20, 2017
THIRD ANGLE PROJECTION	INTERPRET PER ASME Y14.5 - 2009					
MAX SURFACE ROUGHNESS	MARKED ONLY	© 3M COPYR[IGHT] 2017 This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.				
TITLE		DIN C & R-FORM SKT, RA, VERT, SOLDER TAIL OR PRESS-FIT				
CAGE NUMBER		D 78-5100-2670-7				
MODEL		SHT 3 OF 4				

# 3M™ DIN C-FORM & R-FORM SOCKET, DIN 41612 SERIES

VERTICAL, RIGHT ANGLE, SOLDER TAIL OR PRESS-FIT TERMINATION


**Technical Information:** The technical information, recommendations and other statements contained in this document are based upon tests or experience that 3M believes are reliable, but the accuracy or completeness of such information is not guaranteed.

**Product Use:** Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, user is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application.

**Warranty, Limited Remedy, and Disclaimer:** Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

**Limitation of Liability:** Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.

Unless otherwise noted, references to industry specifications are intended to indicate substantial compliance to the material elements of the specification. Such references should not be construed as a guarantee of compliance to all requirements in a given specification.

DESIGN REFERENCE	NEXT ASSEMBLY	REV	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
		A		FEB 24, 2017 PRODUCTION RELEASE	JNC	WL
		B		MAY 30, 2017 REMOVE PLATING SH & FJ	JNC	WL
APPROVED	DATE	APPROVED	DATE	APPROVED		
CHKD	DATE	CHKD	DATE	DATE		
				DATE		
DIVISION	DIVISION CODE	 © 3M COPYRIGHT 2017 This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.				
DO NOT SCALE DRAWING	SCALE $\frac{2}{1}$	TOLERANCES EXCEPT AS NOTED INCHES .00 ± .000 ± .0000 ± MILLIMETERS 0 ± .00 ± .000 ± .000 ±				
THIRD ANGLE PROJECTION	INTERPRET PER ASME Y14.5 - 2009	TITLE <b>DIN C &amp; R-FORM SKT, RA, VERT, SOLDER TAIL OR PRESS-FIT</b>				
MAX SURFACE ROUGHNESS	MARKED SURFACES	CAGE NUMBER	SIZE	DRAWING NO.	REV.	
<input checked="" type="checkbox"/> MARKED ONLY		D		78-5100-2670-7	B	
		MODEL			DET	YES <input type="checkbox"/> NO <input checked="" type="checkbox"/> SHT 4 OF 4

78-5100-2670-7 DRAWING NUMBER  
 B REVISION  
 B  
 A  
 Standard Time 5/30/2017 UTC OffSet