



3M Science.
Applied to Life.™

**Faster.
Smoother.
Smarter.**

**3M™ Liqui-Cel™ SP Series
Membrane Contactors**

An industry-leading technology for bubble-free
inks, coatings, solvents and other process liquids.

Solving the trouble with bubbles

From wide-format graphics to printed tees, ink jet production is a growing market. Faced with high customer expectations for print quality and fast turnaround, printers depend on technologies that help keep the presses running without interruption. And without smudging the fine print.



3M™ Liqui-Cel™ SP Series Membrane Contactors

Bubbles and dissolved gas in inks, solvents, coatings, and other low surface tension fluids lead to poor-quality processing and deposition. 3M™ Liqui-Cel™ SP Series Membrane Contactors offer a simple, in-line solution to keep printers and lines running at optimal quality and speeds.

Liqui-Cel SP Series membrane contactors remove bubbles and dissolved gases from processed liquids to help prevent foaming, nozzle malfunction, misfires and poor drop formation. This helps increase line and printing speeds while minimizing downtime and defects for a faster, smoother printing process—and high-quality output.


- Improve printing quality
- Increase run speeds
- Minimize process interruptions
- Reduce waste and yield loss

Applications


- Aqueous, UV, ceramic, textile and solvent-based inks
- Coatings applied to paper, photographic film, printing plates and electronics
- Contact lens solutions
- Other low surface tension fluids
- Quality test equipment

Optimized ink jet printing and processing

Debubbling on the printhead

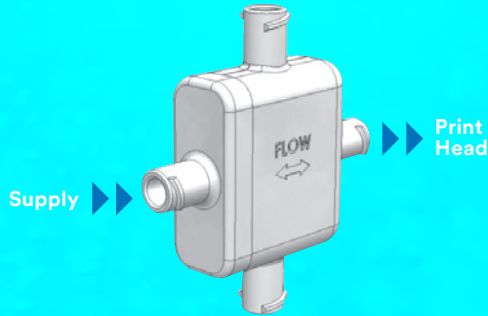


Degassing at filling

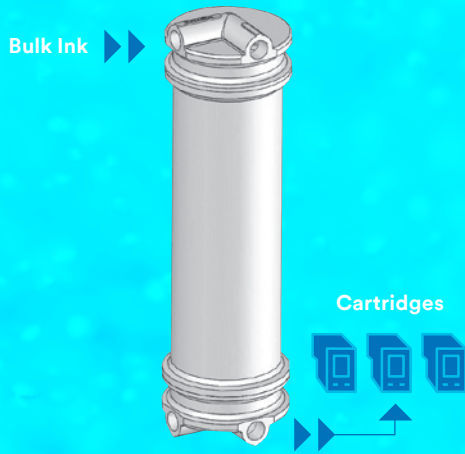


How SP Series membrane contactors work

3M™ Liqui-Cel™ SP Series Membrane Contactors use a non-porous, gas-permeable hollow fiber membrane to transfer dissolved gases from inks, coatings and other low surface tension liquids.

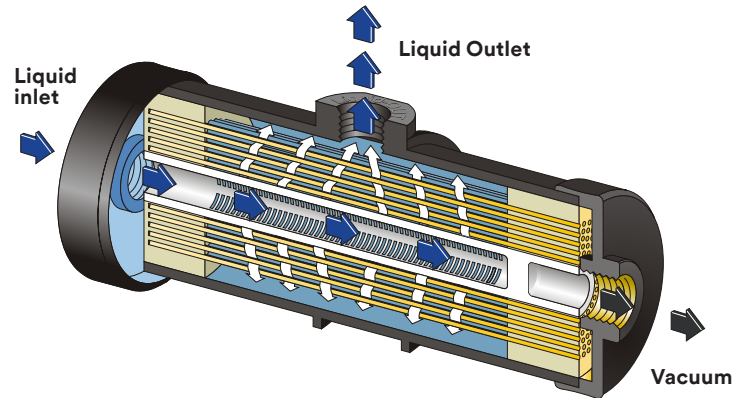

Liquid flows on the outside of the hollow fiber while a vacuum is applied to the inside. The resulting gas concentration differential drives rapid transfer of gases from the liquid into the vacuum.

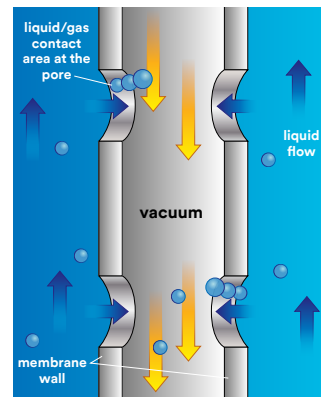

Features and Benefits

- Easy in-line installation
- Continuous debubbling
- Compact, flexible design
- Low maintenance
- Low priming volumes
- Functions with many low surface tension liquids
- Low pressure drop

Reliable debubbling for inks, coatings and more

Many process solutions require debubbling to remove entrained air, prevent foaming, yield loss and other production interruptions, and ensure reliable quality test readings. 3M™ Liqui-Cel™ SP Series Membrane Contactors are well suited for degassing fluids with low surface tension. Contact your 3M representative to discuss your application.

Product Selection and Use: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. As a result, customer is solely responsible for evaluating the product and determining whether it is appropriate and suitable for customer's application, including conducting a workplace hazard assessment and reviewing all applicable regulations and standards (e.g., OSHA, ANSI, etc.). Failure to properly evaluate, select, and use a 3M product and appropriate safety products, or to meet all applicable safety regulations, may result in injury, sickness, death, and/or harm to property.

Warranty, Limited Remedy, and Disclaimer: Unless a different warranty is specifically stated on the applicable 3M product packaging or product literature (in which case such warranty governs), 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR ARISING OUT OF A COURSE OF DEALING, CUSTOM, OR USAGE OF TRADE. If a 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

Limitation of Liability: Except for the limited remedy stated above, and except to the extent prohibited by law, 3M will not be liable for any loss or damage arising from or related to the 3M product, whether direct, indirect, special, incidental, or consequential (including, but not limited to, lost profits or business opportunity), regardless of the legal or equitable theory asserted, including, but not limited to, warranty, contract, negligence, or strict liability.

3M and Liqui-Cel are trademarks of 3M Company. © 2021 3M Company. All rights reserved.



3M Company
3M Separation and
Purification Sciences Division
13840 South Lakes Drive
Charlotte, North Carolina
28273 USA
Phone: +1 980 859 5400

3M Deutschland GmbH
3M Separation and
Purification Sciences Division
Öhder Straße 28
42289 Wuppertal Germany
Phone: +49 202 6099 - 0

LC-1209
70-2016-0266-4

Rev. 05/2021

[3M.com/Liqui-Cel](https://www.3m.com/Liqui-Cel)