

# 3M™ Liqui-Cel™ EXF-2.5×8 Series Membrane Contactor

## Typical Properties

Membrane Characteristics	
Cartridge Configuration	Extra-Flow with Center Baffle
Liquid Flow Guidelines	0.1 – 0.7 m <sup>3</sup> /hr (0.5 – 3.0 gpm)
Membrane Type	X50 Fiber
	Recommended for CO <sub>2</sub> removal from liquid and other gas transfer applications
	X40 Fiber
	Recommended for O <sub>2</sub> removal from liquid and other gas transfer applications
Membrane/Potting Material	Polypropylene / Polyethylene
Priming Volume (approximate)	
Shellside	0.40 L (0.11 gal)
Lumenside	0.15 L (0.04 gal)

Pressure Guidelines*	
	X50 or X40 Fiber
Maximum Shellside LIQUID Working Temperature/ Pressure	5-40°C, 7.2 barg (41-104°F, 105 psig) 70°C, 2.1 barg (158°F, 30 psig)
If no vacuum is used, 1 barg (15 psig) can be added to pressures above.	
Maximum Applied Gas Pressure	4.8 barg at 25°C (70 psig at 77°F)
Maximum applied gas pressure is for integrity testing at ambient temperatures. Normal operating pressures are typically lower.	
Maximum Lumenside Liquid Temperature/Pressure of Semibody Contactor	5°C, 6.2 barg (41°F, 90 psig) 15-25°C, 4.8 barg (59-77°F, 70 psig) 70°C, 1.0 barg (158°F, 15 psig)
* See Operating Guide for complete temp/pressure limits for housings and membrane. Note: Liquid pressure should always exceed gas pressure, including during start-up and shut-down procedures.	

Housing Options and Characteristics	
Material	Polypropylene
Flange Connections	
Shellside (Liquid Inlet/Outlet)	¼ inch NPT female ⅜ inch Flaretek® (nut included)** ½ inch Flaretek® (nut included)**
Lumenside	¼ inch NPT female


\*\* Only available with FKM seal option with welded end caps.

Seal Material Options	Applications
FKM	General Purpose
FFKM (K - UPW)***	Ultra Pure Water
FFKM (K - EXT)****	Chemical Extraction

\*\*\* Only available with welded end caps with NPT connections and X40 fiber.

\*\*\*\* Only available with clamped end caps and NPT connections.

Weight (approximate)	
Dry	0.5 kg (1.1 lbs)
Water-filled (shellside)	0.9 kg (2.0 lbs)

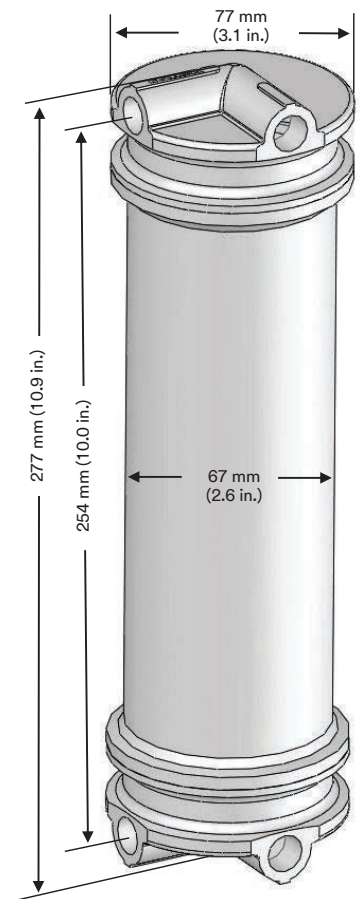

Welded end caps with NPT connections




All dimensions are nominal values for contactors with NPT connections. Overall length with Flaretek® connections increases. See full housing drawing on [3M.com/Liqui-Cel](http://3M.com/Liqui-Cel) for additional details.

**Not for consumer sale or use.**

# 3M™ Liqui-Cel™ EXF-2.5×8 Series Membrane Contactor

## Regulatory

Complies with the limits as set by (EU) 2015/863 amending Annex II to the Restriction on Hazardous Substances (RoHS) Directive (2011/65/EU). 3M™ Liqui-Cel™ EXF-2.5×8 Series Membrane Contactors with FKM seals are constructed of FDA Title 21 CFR § 170-190 compliant materials for wetted parts only at ambient temperatures. 3M™ Liqui-Cel™ EXF-2.5×8 Series Membrane Contactors with FFKM (K-UPW) or FFKM (K-EXT) seals **are not** constructed of FDA Title 21 CFR § 170-190 compliant materials.

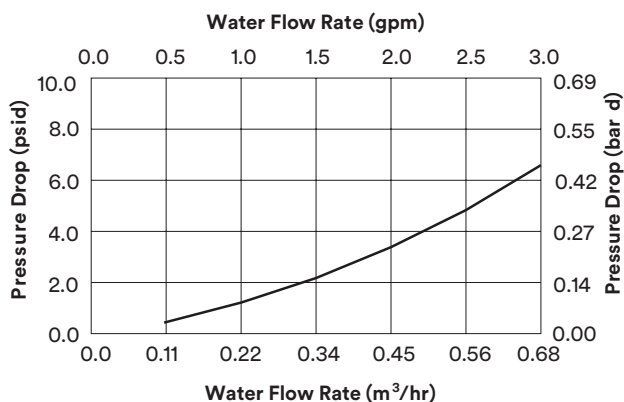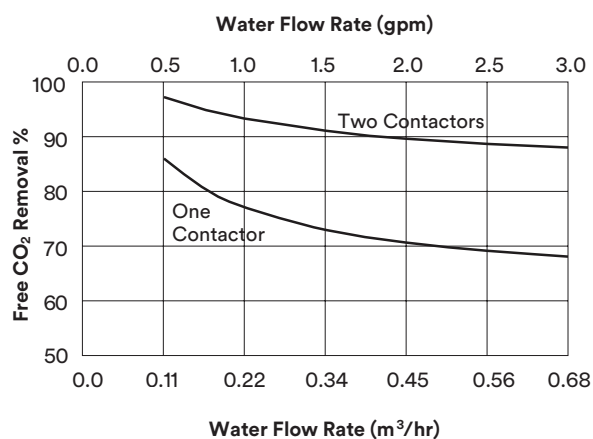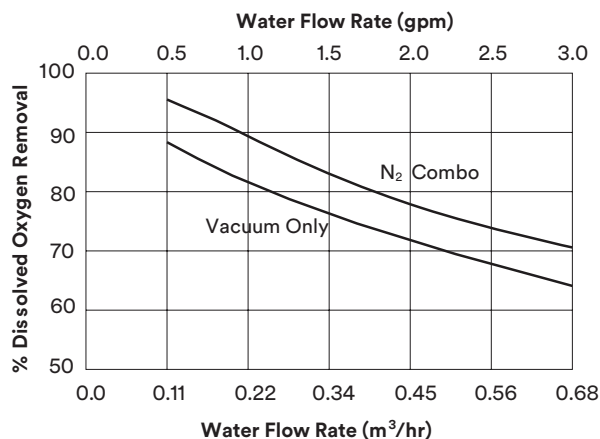

Curves represent nominal values. Characteristics may change under different operating conditions.

Test condition O<sub>2</sub> Removal with X40 membrane 20°C: N<sub>2</sub> vacuum combo mode, N<sub>2</sub> sweep flow rate: 0.05 scfm and 50 mm Hg vacuum Vacuum mode: 50 mm Hg

Test condition CO<sub>2</sub> Removal with X50 membranes 25°C: Air-combo, vacuum 150 mm Hg, air sweep G/L 0.5.

Pressure drop curves using NPT connection. Flaretek® connection will have lower pressure drop.

**Technical Information:** The technical information, guidance, and other statements contained in this document or otherwise provided by 3M are based upon records, tests, or experience that 3M believes to be reliable, but the accuracy, completeness, and representative nature of such information is not guaranteed. Such information is intended for people with knowledge and technical skills sufficient to assess and apply their own informed judgment to the information. No license under any 3M or third party intellectual property rights is granted or implied with this information.

**Product Selection and Use:** Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. As a result, customer is solely responsible for evaluating the product and determining whether it is appropriate and suitable for customer's application, including conducting a workplace hazard assessment and reviewing all applicable regulations and standards (e.g., OSHA, ANSI, etc.). Failure to properly evaluate, select, and use a 3M product and appropriate safety products, or to meet all applicable safety regulations, may result in injury, sickness, death, and/or harm to property.

**Warranty, Limited Remedy, and Disclaimer:** Unless a different warranty is specifically stated on the applicable 3M product packaging or product literature (in which case such warranty governs), 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR ARISING OUT OF A COURSE OF DEALING, CUSTOM, OR USAGE OF TRADE. If a 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

**Limitation of Liability:** Except for the limited remedy stated above, and except to the extent prohibited by law, 3M will not be liable for any loss or damage arising from or related to the 3M product, whether direct, indirect, special, incidental, or consequential (including, but not limited to, lost profits or business opportunity), regardless of the legal or equitable theory asserted, including, but not limited to, warranty, contract, negligence, or strict liability.

3M and Liqui-Cel are trademarks of 3M Company. All other trademarks are the property of their respective owners. © 2021 3M Company. All rights reserved.



3M Company  
3M Separation and  
Purification Sciences Division  
13840 South Lakes Drive  
Charlotte, North Carolina  
28273 USA  
Phone: +1 980 859 5400

3M Deutschland GmbH  
3M Separation and  
Purification Sciences Division  
Önder Straße 28  
42289 Wuppertal Germany  
Phone: +49 202 6099 - 0

LC-1043  
70-2016-0201-1

Rev. 02/2021

3M.com/Liqui-Cel