



3M™ Liqui-Cel™ SP-0.5×1 Series Membrane Contactor

Typical Properties

Membrane Characteristics	
Cartridge Configuration	Transverse Flow
Liquid Flow Guidelines	5–30 ml/min (Liquid must flow on the shellside)
Membrane Type	UP
Membrane/Potting Material	Polyolefin / Epoxy
Priming Volume (approximate)	
Shellside	1.7 ml
Lumenside	1.0 ml



Pressure Guidelines*	
Maximum Shellside LIQUID	5–20°C, 3.1 barg (41–68°F, 45 psig)
Working Temperature/ Pressure	45°C, 1.7 barg (113°F, 25 psig)

* Note: Liquid pressure should always exceed gas pressure.

Housing Options and Characteristics	
Material	Black Polyethylene
Flange Connections	
Shellside (Liquid Inlet/Outlet)	Female Luer Lock
Lumenside (vacuum)	Female Luer Lock

Weight (approximate)	
Dry	8 grams



Regulatory	
Complies with the limits as set by (EU) 2015/863 amending Annex II to the Restriction on Hazardous Substances (RoHS) Directive (2011/65/EU). 3M™ Liqui-Cel™ SP-0.5×1 Series Membrane Contactors are not constructed of FDA Title 21 CFR § 174-186 compliant materials. Not for use in food contact applications.	

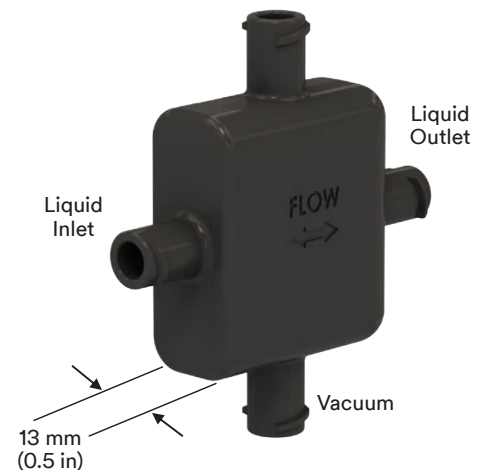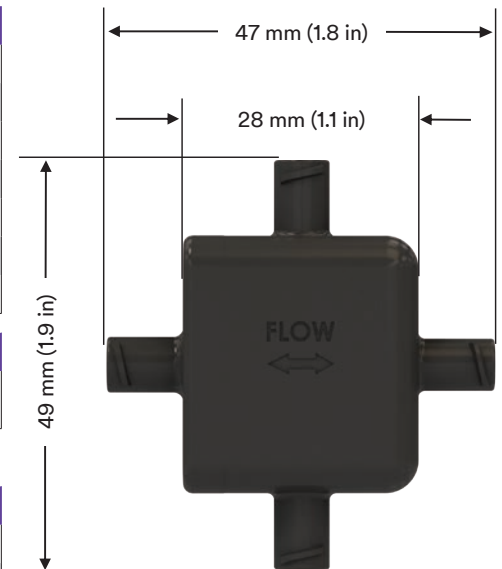

All dimensions are nominal values. See full housing drawing on 3M.com/Liqui-Cel for additional details.

Not for consumer sale or use.

3M™ Liqui-Cel™ SP-0.5×1 Series Membrane Contactor

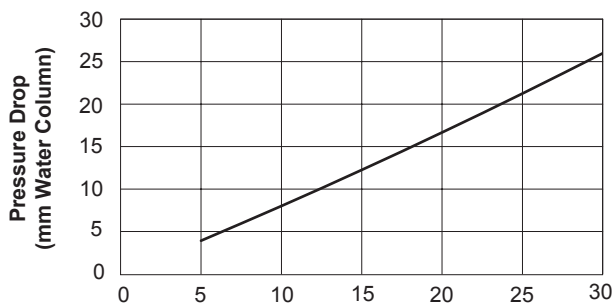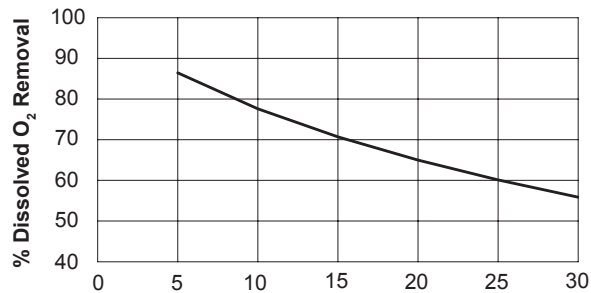

Water flow rate, ml/min

Water flow rate, ml/min

Test condition O₂ Removal: Vacuum mode with water at 20°C. Vacuum: 50 torr.

Product Selection and Use

Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. As a result, customer is solely responsible for evaluating the product and determining whether it is appropriate and suitable for customer's application, including conducting a workplace hazard assessment and reviewing all applicable regulations and standards (e.g., OSHA, ANSI, etc.). Failure to properly evaluate, select, and use a 3M product and appropriate safety products, or to meet all applicable safety regulations, may result in injury, sickness, death, and/or harm to property.

Warranty, Limited Remedy, and Disclaimer

Unless a different warranty is specifically stated on the applicable 3M product packaging or product literature (in which case such warranty governs), 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR ARISING OUT OF A COURSE OF DEALING, CUSTOM, OR USAGE OF TRADE. If a 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

Limitation of Liability

Except for the limited remedy stated above, and except to the extent prohibited by law, 3M will not be liable for any loss or damage arising from or related to the 3M product, whether direct, indirect, special, incidental, or consequential (including, but not limited to, lost profits or business opportunity), regardless of the legal or equitable theory asserted, including, but not limited to, warranty, contract, negligence, or strict liability.

3M and Liqui-Cel are trademarks of 3M Company. All other trademarks are the property of their respective owners.
© 2019 3M Company. All rights reserved.



3M Separation and Purification Sciences Division
13840 South Lakes Drive
Charlotte, North Carolina 28273
USA
Phone: +1 980 859 5400
Fax: +1 980 859 5258

3M Deutschland GmbH Separation and Purification Sciences Division
Öhder Straße 28
42289 Wuppertal Germany
Phone: +49 202 6099 - 0
Fax: +49 202 6099 - 241



LC-1018
Rev. 05/2019

3M.com/Liqui-Cel