



Degassing Sea Water Has Never Been This Compact, Efficient, and Adaptable



Figure 1: 3M™ Liqui-Cel™ Membrane Contactor modules that can process 75,000 - 125,000 BPD

3M™ Liqui-Cel™ Membrane Contactors offer a modular skid option for off-shore oil platforms that is significantly smaller and lighter than traditional vacuum towers.

Utilizing compact Liqui-Cel degassing contactors on platforms is now a viable option based on the new high-pressure degassing modules designed for ASME code-stamped RO vessels. High-pressure RO vessels are already proven and accepted on platforms; now they can be utilized to greatly

reduce the footprint and the weight of degassing technology.

Compared to vacuum towers, Liqui-Cel contactors have 10 times the surface area per volume, which is a huge advantage on an offshore platform. The smaller, lighter design simplifies and lowers the cost of supporting a liquid-full vacuum tower.

Table 1 captures the expandable nature of these Liqui-Cel membrane contactor systems. For example, an initial system accommodating 75,000 BPD can easily be expanded to handle 200,000 BPD if future needs arise. It can also be turned down to meet smaller demands.

Liqui-Cel membrane contactors have been used around the world for over 20 years. They are field-proven in diverse applications such as nuclear and coal-fired power plants, boiler feed water applications, and in the food and beverage, pharmaceutical,

Table 1: System scenarios using 3M™ Liqui-Cel™ Membrane Contactors.

Design Criteria	Option 1	Option 2	Option 3
Contactator Size	8 × 80	8 × 80	8 × 80
Membrane Type	X-40	X-40	X-40
Feed Flow (BPD)	75,000	125,000	200,000
Feed Flow (USGPM)	2188	3646	5833
Temperature (°F)	64	64	64
Temperature (°C)	18	18	18
Component Concentrations (ppb)			
Inlet O ₂	9,415	9,415	9,415
Inlet N ₂	15,443	15,443	15,443
Average Outlet O ₂	5	6	6
Maximum Outlet O ₂	9	10	10
Minimum Gas Removal O ₂	99.90%	99.89%	99.89%
Number of Contactors Required	32	52	84
Number of Parallel Trains	32	52	84
Number in Series	1	1	1
Min. Pressure Drop through train, less pipe loss (psi)	25.7	26.9	26.4
Operating Mode	Combo/N ₂	Combo/N ₂	Combo/N ₂
Total Sweep Rate, scfm	16	26	42
Sweep Composition			
Oxygen	0.010%	0.010%	0.010%
Nitrogen	99.990%	99.990%	99.990%
Carbon Dioxide	0.000%	0.000%	0.000%
Vacuum Volume Flow (acfm)	429	702	1131
Liquid Ring Vacuum Level (mm Hg abs)	50	50	50




Figure 2: 3M™ Liqui-Cel™ EXF-8×80 Series high pressure ASME code- rated degassing system

semiconductor and digital printing sectors for O₂ and CO₂ removal.

Figure 3 demonstrates the increased acceptance of 3M™ Liqui-Cel™ Membrane Contactors with the growth of installed systems over the years. Most systems that were installed over a decade ago are still reliably degassing the water streams they were installed to manage.

To learn more about Liqui-Cel technology and how it can be integrated into existing or new platforms, please contact your 3M representative or visit 3M.com/Liqui-Cel.

Figure 3: Liquid Processed with 3M™ Liqui-Cel™ Membrane Contactors (GPD)

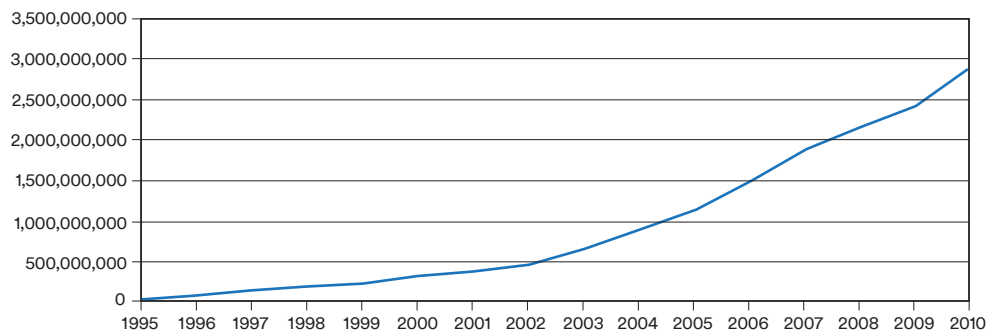

Technical Information: The technical information, recommendations and other statements contained in this document are based upon tests or experience that 3M believes are reliable, but the accuracy or completeness of such information is not guaranteed.

Product Use: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, user is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application.

Warranty, Limited Remedy, and Disclaimer: Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

Limitation of Liability: Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.

3M and Liqui-Cel are trademarks of 3M Company. All other trademarks are the property of their respective owners. © 2017 3M Company. All rights reserved.



ISO 9001



Separation and Purification Sciences Division
13840 South Lakes Drive
Charlotte, North Carolina
28273 USA
Phone: +1 980 859 5400

3M Deutschland GmbH
Separation and Purification Sciences Division
Öhder Straße 28
42289 Wuppertal Germany
Phone: +49 202 6099 - 0
Fax: +49 202 6099 - 241

LC-1074
Rev. 03/2017

3M.com/Liqui-Cel