

# Jotem Water Treatment Uses a 3M™ Liqui-Cel™ System for Oxygen Removal from the Feedwater of a Central District Heating System in a Dutch Power Station

## Introduction

Central district heating systems have gained attention in recent years because they can be more efficient than localized boiler units. The efficiency of district heating is usually due to power generation plants being able to produce heat and electricity simultaneously. District heating also helps prevent pollution by using advanced flue gas cleaning techniques.

Central district heating systems distribute heated water from power plants to densely populated residential and industrial areas through insulated piping networks. Large storage tanks are typically used to safely store heat for use during peak demand times. High water quality is required to prevent internal corrosion and to increase the lifetime of piping and storage tanks.

Inlet water is typically filtered, softened and deoxygenated during the initial filling of the system. But a water source is also needed to feed the recirculation system that compensates for any water loss during operational or seasonal fluctuations, and this water must also be deoxygenated to prevent corrosion. As part of this refilling system, Jotem Waterbehandling BV installed 3M™ Liqui-Cel™ Membrane Contactors for O<sub>2</sub> removal at a Netherlands power station.

## 3M™ Liqui-Cel™ Membrane Contactor Technology

The technology behind Liqui-Cel membrane contactors is based on Henry's Law, which states that gasses will dissolve in water relative to their partial pressure above the liquid. The solubility constant (Henry's Constant), which is different for each gas, also depends on temperature. Water below atmospheric standard conditions (20°C, 1 bar) and in contact with ambient air contains up to 8-9 ppm (mg/L) of oxygen.

Water flows through the contactor on the outside (shellside or liquid side) of the hollow fiber membrane. Because the membrane is microporous and hydrophobic, only gas molecules are able to pass through the membrane. Applying a vacuum or using an inert sweep gas on the inside (lumenside) of the hollow fiber membrane lowers the partial pressure of the gas that needs to be removed, carrying excess gasses away into the vacuum.

## System Design

Jotem's goals were to achieve an O<sub>2</sub> specification of <10 ppb for filling the storage water tanks and to maintain a constant fill level. For an inlet water flow of 30 m<sup>3</sup>/h, Jotem installed



four 14-inch Liqui-Cel contactors connected in series. To achieve the low O<sub>2</sub> requirements, the system operates in N<sub>2</sub>-vacuum (combo) operation. The vacuum pump pulls vacuum through a parallel connected manifold from the bottom gas ports, while the N<sub>2</sub> sweep gas enters the contactors through the top gas ports. The O<sub>2</sub> content is reduced through each membrane step.

The necessary 2.2 m<sup>3</sup>/h of total nitrogen sweep gas (0.55 m<sup>3</sup>/h for each module) is produced in a separate N<sub>2</sub> generator with a pressure swing absorption technique. This generator constantly creates N<sub>2</sub> gas with a purity of >99.99% (100 ppm of O<sub>2</sub>) from ambient air. For each cubic meter of N<sub>2</sub>, about 6 m<sup>3</sup> of compressed air (at 6 bar) is required. The nitrogen can be stored in pressurized tanks during system stand-by.

# Technical Brief | Jotem Water Treatment Uses a 3M™ Liqui-Cel™ System for Oxygen Removal from the Feedwater of a Central District Heating System in a Dutch Power Station


## Results

The vacuum level of 66 mbar absolute (50 torr) is created by a liquid ring vacuum pump with an external water cooling system. The service water is recycled to about 50% by a gas/water separator.

The system exceeded expectations, achieving 5 ppb oxygen levels. The 3M™ Liqui-Cel™ Membrane Contactor system also has a much smaller footprint than a traditional degassification system. This smaller footprint allowed Jotem to install the O<sub>2</sub> removal system close to point-of-use at the treatment solution, lowering energy demand and operating costs.

To learn more about Liqui-Cel technology and how it can be integrated into existing or new platforms, please contact your 3M representative or visit [3M.com/Liqui-Cel](http://3M.com/Liqui-Cel).

Figure 1. Jotem's District Heating System with 3M™ Liqui-Cel™ Membrane Contactors

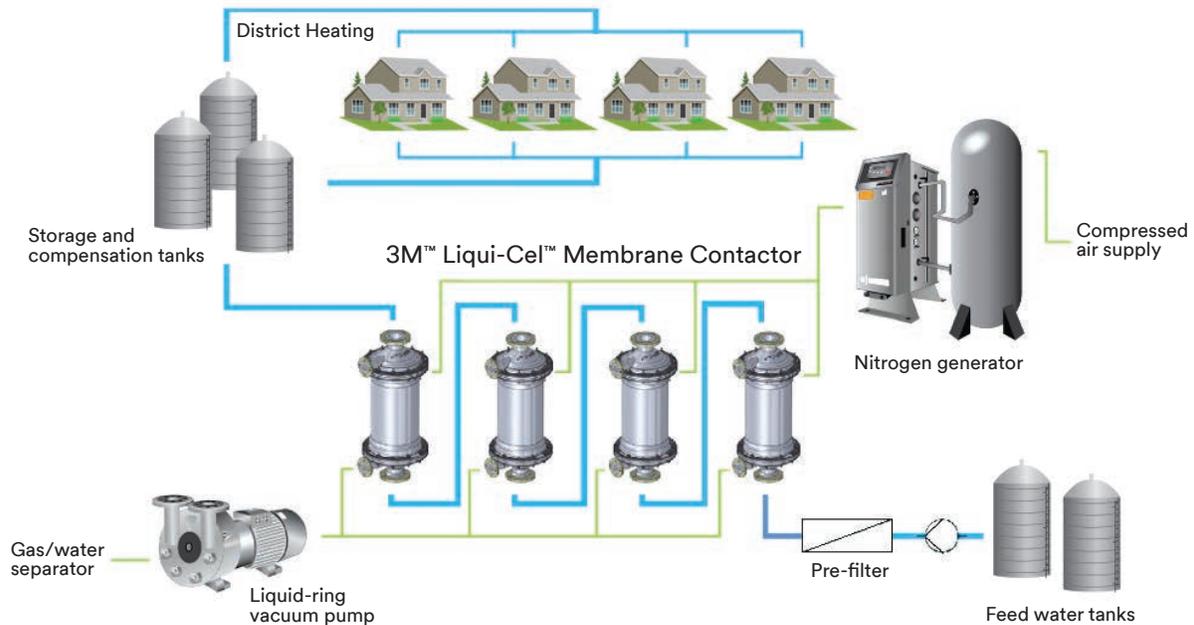

**Technical Information:** The technical information, guidance, and other statements contained in this document or otherwise provided by 3M are based upon records, tests, or experience that 3M believes to be reliable, but the accuracy, completeness, and representative nature of such information is not guaranteed. Such information is intended for people with knowledge and technical skills sufficient to assess and apply their own informed judgment to the information. No license under any 3M or third party intellectual property rights is granted or implied with this information.

**Product Selection and Use:** Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. As a result, customer is solely responsible for evaluating the product and determining whether it is appropriate and suitable for customer's application, including conducting a workplace hazard assessment and reviewing all applicable regulations and standards (e.g., OSHA, ANSI, etc.). Failure to properly evaluate, select, and use a 3M product and appropriate safety products, or to meet all applicable safety regulations, may result in injury, sickness, death, and/or harm to property.

**Warranty, Limited Remedy, and Disclaimer:** Unless a different warranty is specifically stated on the applicable 3M product packaging or product literature (in which case such warranty governs), 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR ARISING OUT OF A COURSE OF DEALING, CUSTOM, OR USAGE OF TRADE. If a 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

**Limitation of Liability:** Except for the limited remedy stated above, and except to the extent prohibited by law, 3M will not be liable for any loss or damage arising from or related to the 3M product, whether direct, indirect, special, incidental, or consequential (including, but not limited to, lost profits or business opportunity), regardless of the legal or equitable theory asserted, including, but not limited to, warranty, contract, negligence, or strict liability.

3M and Liqui-Cel are trademarks of 3M Company. All other trademarks are the property of their respective owners. © 2021 3M Company. All rights reserved.



3M Company  
3M Separation and  
Purification Sciences Division  
13840 South Lakes Drive  
Charlotte, North Carolina  
28273 USA  
Phone: +1 980 859 5400

3M Deutschland GmbH  
3M Separation and  
Purification Sciences Division  
Öhder Straße 28  
42289 Wuppertal Germany  
Phone: +49 202 6099 - 0

LC-1057  
70-2016-0223-5

Rev. 02/2021

[3M.com/Liqui-Cel](http://3M.com/Liqui-Cel)