

3M™ Liqui-Flux™ Membrane Module UF-PES Series, Type W20-08N

Typical Properties

Applications	
Intended Use	Ultrafiltration
Membrane Characteristics	
Membrane Type	Hollow fiber, inside - out
Membrane Material	Polyethersulfone
Outer/Inner Diameter	1.2 mm/0.8 mm
Burst Pressure	≥1200 kPa (174 psi)
Membrane Configuration	Multifiber P.E.T. Technology
Housing Characteristics	
Housing Material	PVC
Potting Material	Polyurethane
Sealing End Caps	EPDM
Connectors	Variable, see back side
Weight, Dry	60 kg (132 lbs)
Weight Filled with Liquid	157 kg (346 lbs)
Effective Membrane Surface Area	91 m ² (979 ft ²)
Maximum Working Pressure	600 kPa (87 psi) @ 20°C (68°F)
Maximum Working Temperature	40°C (104°F) @ 400 kPa (58 psi)
Regulatory Compliance	
USA	ANSI/NSF61




Typical Application / Operating Data	
Operating Mode	Dead-End/Cross-Flow
Typical Flux Range, Filtration	50 - 150 l/m ² *h (29 - 88 gal/ft ² *day)
Typical Flux, Backwash	250 l/m ² *h (147 gal/ft ² *day) (-10% / +20%)
Filtrate Flow Rate Range	5 - 14 m ³ /h (22 - 62 gpm)
Typical Transmembrane Pressure, Filtration	10 - 70 kPa (1.5 - 10 psi)
Typical Transmembrane Pressure, Backwash	50 - 200 kPa (7 - 30 psi)
Maximum Transmembrane Pressure	250 kPa (36 psi)
Typical Cleaning Chemicals	NaOH, HCl, NaOCl
pH-range During Cleaning	1 - 13
Maximum Instantaneous Free Chlorine Concentration	200 ppm @ pH ≥9.5
Maximum Free Chlorine Exposure	200000 ppm h @ pH ≥9.5

Variable Connect Concept - VCC


3M™ Liqui-Flux™ Membrane Module UF-PES Series, Type W20-08N are optionally equipped with one or two filtrate ports and end caps with axial or radial port. The connection of those ports is available as Victaulic® 76 mm or 73 mm.

Those options are defined by the following code:

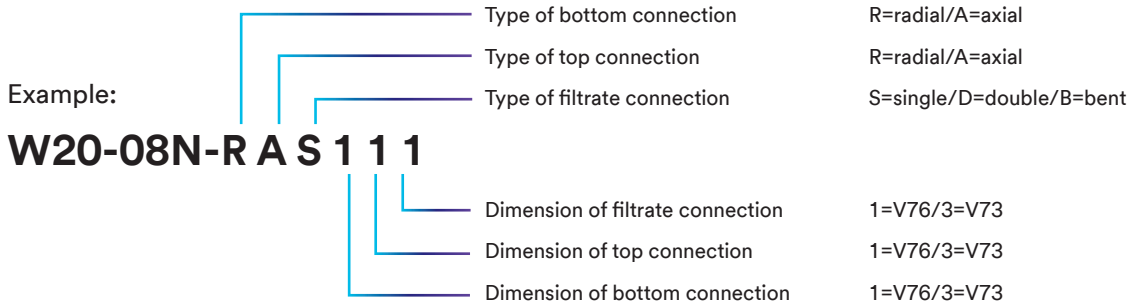

All end caps are prepared to fasten the module directly on the skid or to connect it to other modules.

To obtain information on product configurations and dimensions, please refer to the separate 3M™ Liqui-Flux™ Membrane Module VCC Dimensions document available upon demand and on our website at 3M.com/Liqui-Flux.

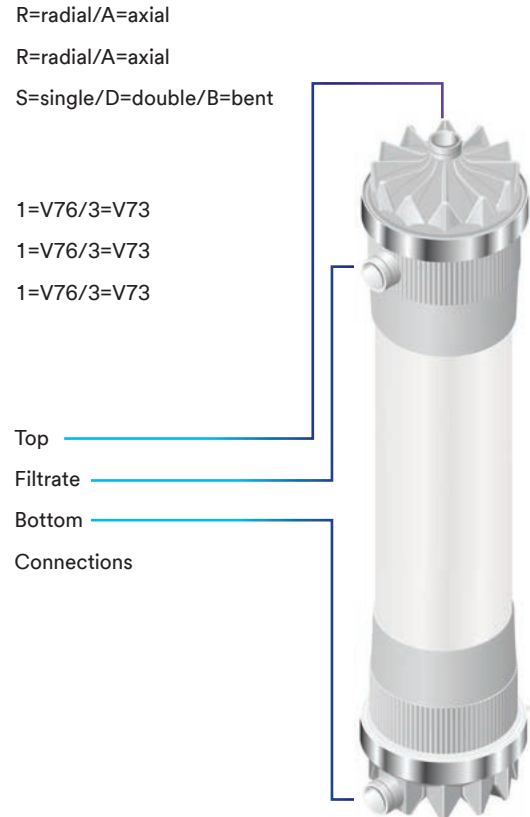

Technical Information: The technical information, guidance, and other statements contained in this document or otherwise provided by 3M are based upon records, tests, or experience that 3M believes to be reliable, but the accuracy, completeness, and representative nature of such information is not guaranteed. Such information is intended for people with knowledge and technical skills sufficient to assess and apply their own informed judgment to the information. No license under any 3M or third party intellectual property rights is granted or implied with this information.

Product Selection and Use: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. As a result, customer is solely responsible for evaluating the product and determining whether it is appropriate and suitable for customer's application, including conducting a workplace hazard assessment and reviewing all applicable regulations and standards (e.g., OSHA, ANSI, etc.). Failure to properly evaluate, select, and use a 3M product and appropriate safety products, or to meet all applicable safety regulations, may result in injury, sickness, death, and/or harm to property.

Warranty, Limited Remedy, and Disclaimer: Unless a different warranty is specifically stated on the applicable 3M product packaging or product literature (in which case such warranty governs), 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR ARISING OUT OF A COURSE OF DEALING, CUSTOM, OR USAGE OF TRADE. If a 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

Limitation of Liability: Except for the limited remedy stated above, and except to the extent prohibited by law, 3M will not be liable for any loss or damage arising from or related to the 3M product, whether direct, indirect, special, incidental, or consequential (including, but not limited to, lost profits or business opportunity), regardless of the legal or equitable theory asserted, including, but not limited to, warranty, contract, negligence, or strict liability.

3M and Liqui-Flux are trademarks of 3M Company. All other trademarks are the property of their respective owners. © 2020 3M Company. All rights reserved.



3M Separation and Purification Sciences Division
13840 South Lakes Drive
Charlotte, North Carolina
28273 USA
Phone: +1 980 859 5400
Fax: +1 704 587 8610

3M Deutschland GmbH
3M Separation and Purification Sciences Division
Öhder Straße 28
42289 Wuppertal Germany
Phone: +49 202 6099 - 0
Fax: +49 202 6099 - 241

LF-1043
70-2016-0198-9

Rev. 11/2020

3M.com/Liqui-Flux