



3M Science.
Applied to Life.™



**Supporting your designs
behind the seams**


Innovative fastening solutions



Experience simplicity.

When it comes to innovative fastening solutions, you can depend on 3M.

Challenge traditional fastening methods.

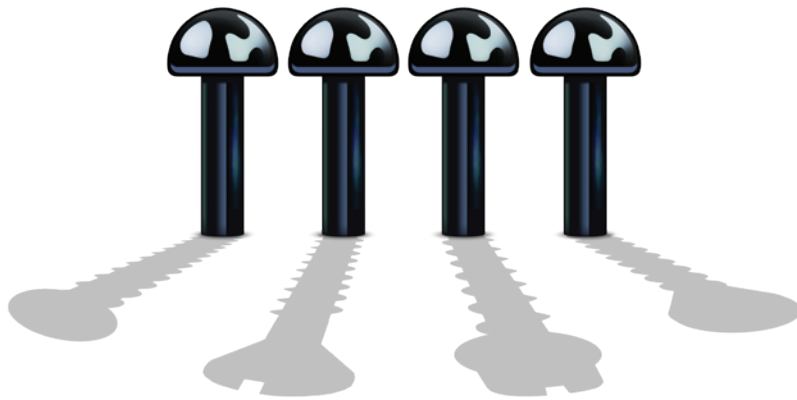


Creative alternatives to fastening challenges.

You have options. Whether you're frustrated by the performance of your current reclosable fastening method, or you've never considered how much easier fastening could be, 3M offers a large portfolio of solutions.

- Clean, smooth “behind the scenes” hold for aesthetic improvements
- Lightweight alternatives to metal fasteners
- Simple to apply, use and maintain
- Variety of strengths to fit your project needs
- Flexibility to fit your designs — even the most constricted areas
- Ability to join dissimilar materials without corrosion and contamination
- Vibration absorption and security — no loosening or failing attachments
- Durable for repeated opening and closings — hundreds of reattachments



Strength Increases



3M™ Dual Lock™
Reclosable Fastener
Type 400



3M™ Dual Lock™
Reclosable Fastener
Type 250



3M™ Dual Lock™
Reclosable Fastener
Type 170



3M™ Dual Lock™
Reclosable Fastener
Low Profile



3M™ Hook and Loop
Reclosable Fastener
Standard Thickness



3M™ Hook and Loop
Reclosable Fastener
Low Profile

Holding strength increases as you move up from 3M™ Hook and Loop through 3M™ Dual Lock™ Reclosable Fasteners.

Super strength. Ultimate ease.

3M™ Dual Lock™ Reclosable Fasteners

Unique mushroom-shaped heads snap shut and stay locked.

- Helps reduce vibration
- Temperature, moisture and UV resistant
- Durable — up to 1,000 openings and closings before losing 50% of original tensile strength
- Pressure-sensitive adhesive easily forms a powerful bond
- Interlocking mushroom-shaped heads have **5X the tensile strength** of hook-and-loop products
- Application and maintenance ease
- Low-profile option available — approximately half the thickness of standard fastener



Secure plastic signs to window glass



Mount transponder on windshield



Attach elevator control panel to interior wall



Fasten ceiling panels to interior for future access



Attach access panels to industrial, electronic and electrical equipment

Reliable hold for light-duty attachments

3M™ Hook and Loop Reclosable Fasteners

Hooks on one side, loops on the other for secure, repeated closures.

- 3M adhesive expertise adds reliable PSA hold on contact with a variety of materials
- Low-profile options available, as much as 50% thinner than 3M standard Dual Lock product
- Up to 5,000 closures for our standard hook and loop
- Flame-resistant product available
- Also available without adhesive
- Custom colours available



Attach cushioning panels in an ambulance or bus



Hang graphics and banners that change frequently



Sew to the fabric and leather of jackets and gloves



Use as a replacement for string, tapes, rubber bands, wire and strapping



Attach removable seat cushions

Select the right 3M™ Dual Lock™ Reclosable Fastener for the job.



Product	Stem Density per cm ² (in ²)	Adhesive	Colour	3M Liner	Engaged Thickness	Temperature Resistance	Substrates					Use	Applications					
							Metals (Al, SS)	Glass	Plastics (Acrylic, PC, ABS)	Powder Coated Paints	Low Surface Energy (PP, PE)		Indoor/Outdoor	Interior Panels (Walls, doors, headliner, storage)	Accessory Attachment	Curtain Rails	Seats	
Specialty Vehicle																		
SJ3550	39 (250)	White Acrylic	Black	Clear, 0.10 mm (4 mil) Polyolefin	5.7 mm (0.23 in)	93°C (200°F)	■	●	■	▲	▲	Indoor/Outdoor	■	■	■	■	■	
SJ3551	62 (400)						■	●	■	▲	▲	Indoor/Outdoor	■	■	■	■		
SJ3552	26 (170)						■	●	■	▲	▲	Indoor/Outdoor	■	■	■	■		
SJ3560	39 (250)	Clear Acrylic	Clear	Clear, 0.10 mm (4 mil) Polyolefin	5.7 mm (0.23 in)	104°C (220°F)	●	■	●	▲	▲	Indoor/Outdoor	●	●	●	●	●	
SJ4570	Low Profile	Low Surface Energy Acrylic	Clear	Brown, 83# Polykraft	2.489 mm (0.098 in)	70°C (158°F)	●	●	●	■	■	Indoor	●	●	●	●	●	



General Industrial							Metals (Al, SS)	Glass	Plastics (Acrylic, PC, ABS)	Powder Coated Paints	Low Surface Energy (PP, PE)	Indoor/Outdoor	Panel Assembly	Accessory Attachment	General Attachment	Floor Attachment	
Specialty Vehicle																	
SJ3550	39 (250)	White Acrylic	Black	Clear, 0.10 mm (4 mil) Polyolefin	5.7 mm (0.23 in)	93°C (200°F)	■	●	■	▲	▲	Indoor/Outdoor	■	■	■	■	
SJ3551	62 (400)						■	●	■	▲	▲	Indoor/Outdoor	■	■	■	■	
SJ3552	26 (170)						■	●	■	▲	▲	Indoor/Outdoor	■	■	■	■	
SJ3560	39 (250)	Clear Acrylic	Clear	Clear, 0.10 mm (4 mil) Polyolefin	5.7 mm (0.23 in)	104°C (220°F)	●	■	●	▲	▲	Indoor/Outdoor	●	●	●	●	
SJ4570	Low Profile	Low Surface Energy Acrylic	Clear	Brown, 83# Polykraft	2.489 mm (0.098 in)	70°C (158°F)	●	●	●	■	■	Indoor	●	●	●	●	




POP, Display and Signage							Metals (Al, SS)	Glass	Plastics (Acrylic, PC, ABS)	Powder Coated Paints	Low Surface Energy (PP, PE)	Indoor/Outdoor	Trade Shows and Exhibits	Point of Purchase Displays	General Signage	Interior Design	
Specialty Vehicle																	
SJ3550	39 (250)	White Acrylic	Black	Clear, 0.10 mm (4 mil) Polyolefin	5.7 mm (0.23 in)	93°C (200°F)	●	●	●	▲	▲	Indoor/Outdoor	●	●	●	●	
SJ3551	62 (400)						●	●	●	▲	▲	Indoor/Outdoor	●	●	●	●	
SJ3552	26 (170)						●	●	●	▲	▲	Indoor/Outdoor	●	●	●	●	
SJ3560	39 (250)	Clear Acrylic	Clear	Clear, 0.10 mm (4 mil) Polyolefin	5.7 mm (0.23 in)	104°C (220°F)	●	●	●	▲	▲	Indoor/Outdoor	●	●	●	●	
SJ4570	Low Profile	Low Surface Energy Acrylic	Clear	Brown, 83# Polykraft	2.489 mm (0.098 in)	70°C (158°F)	■	■	■	■	■	Indoor	■	■	■	■	

- Best suggested product
- Alternative suggested product
- ▲ Alternate product — must use primer

Temperature Performance	
Best	SJ3560
Better	SJ3550
Good	SJ4570

Dual Lock Effective Combinations	
Strongest	Type 400 to Type 250
Stronger	Type 400 to Type 170
Strong	Type 250 to itself
Not Recommended	Type 170 to itself or Type 400 to itself



Innovative solutions from 3M

We've got you covered.

The 3M lineup of reclosable fasteners taps into a wealth of 3M innovations, such as the unique microreplicated interlocking mushroom-shaped heads and the unmatched bond of 3M™ VHB™ Tape. These technologies combine to deliver the transformative **3M™ Dual Lock™ Reclosable Fasteners** with optimum holding strength and ease of use. In addition, 3M capabilities in adhesives improve our standard **3M™ Hook and Loop Reclosable Fasteners** in bonding to a variety of materials. From bundling and strapping to assembling wall panels, there's a product just right for your application that offers you the best in 3M quality and ingenuity.



For more information, visit [3M.ca/Fasteners](https://www.3m.ca/Fasteners) or call 1-800-364-3577.

Warranty, Limited Remedy and Disclaimer: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. User is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application. Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

Limitation of Liability: Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



**3M Industrial Adhesives
and Tapes Division**
3M Canada
P.O. Box 5757
London, Ontario N6A 4T1
Phone 1-800-364-3577
Web 3M.ca/Fasteners