



Science.
Applied to Life.™

69 kV / 72.5 kV

High Voltage Underground Cable Accessories
for 69 kV / 72.5 kV

Reliable
solutions
for trusted
connections.

3M™ Cold Shrink QT-III Termination Kits for 69kV / 72.5kV

3M™ Cold Shrink Termination Kits are designed to help provide high reliability and help save you time and money.


Cold Shrink Delivery Systems:

- Installing quickly and easily
- Helping to reduce potential craft errors
- Requiring no specialized tools or flame
- Lightweight for safer and easier installation
- Safer to use with no flame or torch needed



3M™ Cold Shrink QT-III Termination 7673-S-8/10 for 69 kV / 72.5 kV

3M Cold Shrink Terminations 69kV/72.7kV 7673-S-8/10 Series **meet or exceed requirements of IEEE 48, Class 1 and IEC 60840**. The semi-con/high-k adaptor provides reduced surface stress, which allows for a more compact termination, with large cross-sectional coverage. (1/0awg/50 mm² - 3000 kcmil/1500 mm², insulation O.D. 2.01"/51, 1 mm - 3.45"/87, 6 mm)

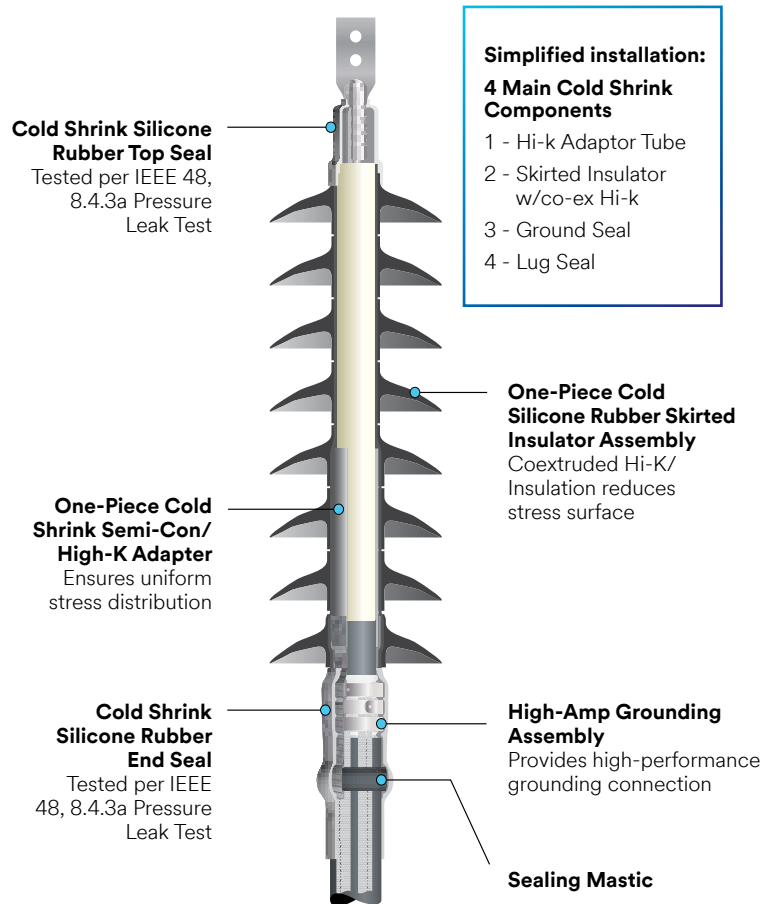

Direct Heat Shrink/Porcelain Replacement Application

Step 1 •



Remove existing termination and clean.

Step 2 •



Determine position of skirt assembly and stress control tubes.

Step 3 •



Install grounding moisture seal.

Step 4 •



Install primary stress control.

Step 5 •



Install the skirt assembly tube.

Step 6 •



Install the top seal tube.

Step 7 •

Install the bottom seal tube.



NOTE: Minimal or no additional cutbacks required to existing cable. Can use existing lug as there is no need to replace it.

3M™ Cold Shrink QT-III Silicone Rubber Skirted Termination Kit 7673-S-8 & 7673-S-10 Series

Kit Number	Typical conductor* size range AWG kcmil (mm²)	Primary insulation OD range inches (mm)	Jacket OD range inches (mm)	Maximum lug width inches (mm)	Number of skirts	Dimension A typical	Creepage distance typical	Pollution class USCD required for 72.5 kV per IEC 60815
Standard 8 Skirt Termination Kit(s)								
7673-S-8(S)	350 - 1500 (175 - 725)	2.01 - 2.87 (51.1 - 72.9)	2.25 - 3.45 (57.2 - 87.6)	3 (76)	8	46" (117 cm)	82" (208 cm)	Class (d) 43.3 mm/kV Heavy
7673-S-8	1500 - 3000 (800 - 1500)	2.79 - 3.45 (70.9 - 87.6)	3.00 - 4.25 (76.2 - 108.0)	4 (102)	8	46" (117 cm)	82" (208 cm)	Class (d) 43.3 mm/kV Heavy
Industrial 10 Skirt Termination Kit(s)								
7673-S-10(R)	1/0 - 350 (50 - 175)	1.30 - 2.36 (33.0 - 60.0)	1.60 - 2.85 (40.6 - 72.4)	2 (51)	10	49" (124 cm)	89" (226 cm)	Class (d) 53.7 mm/kV Very Heavy
7673-S-10(S)	350 - 1500 (175 - 725)	2.01 - 2.87 (51.1 - 72.9)	2.25 - 3.45 (57.2 - 87.6)	3 (76)	10	52" (132 cm)	105" (266 cm)	Class (d) 53.7 mm/kV Very Heavy
7673-S-10	1500 - 3000 (800 - 1500)	2.79 - 3.45 (70.9 - 87.6)	3.00 - 4.25 (76.2 - 108.0)	4 (102)	10	52" (132 cm)	105" (266 cm)	Class (d) 53.7 mm/kV Very Heavy
Industrial 10 Skirt Termination Kit(s) w/WaterBlock								
7673-S-10(R)-WB	1/0 - 350 (50 - 175)	1.30 - 2.36 (33.0 - 60.0)	1.60 - 2.85 (40.6 - 72.4)	2 (51)	10	49" (124 cm)	89" (226 cm)	Class (d) 53.7 mm/kV Very Heavy
7673-S-10(S)-WB	350 - 1500 (175 - 725)	2.01 - 2.87 (51.1 - 72.9)	2.25 - 3.45 (57.2 - 87.6)	3 (76)	10	52" (132 cm)	105" (266 cm)	Class (d) 53.7 mm/kV Very Heavy
7673-S-10-WB	1500 - 3000 (800 - 1500)	2.79 - 3.45 (70.9 - 87.6)	3.00 - 4.25 (76.2 - 108.0)	4 (102)	10	52" (132 cm)	105" (266 cm)	Class (d) 53.7 mm/kV Very Heavy
Inverted 8 and 10 Skirt Termination Kit(s)								
7673-S-INV-8(S)	350 - 1500 (175 - 725)	2.01 - 2.87 (51.1 - 72.9)	2.25 - 3.45 (57.2 - 87.6)	3 (76)	8	46" (117 cm)	82" (208 cm)	Class (d) 43.3 mm/kV Heavy
7673-S-INV-8	1500 - 3000 (800 - 1500)	2.79 - 3.45 (70.9 - 87.6)	3.00 - 4.25 (76.2 - 108.0)	4 (102)	8	46" (117 cm)	82" (208 cm)	Class (d) 43.3 mm/kV Heavy
7673-S-INV-10(R)	1/0 - 350 (50 - 175)	1.30 - 2.36 (33.0 - 60.0)	1.60 - 2.85 (40.6 - 72.4)	2 (51)	10	49" (124 cm)	89" (226 cm)	Class (d) 53.7 mm/kV Very Heavy
7673-S- INV-10(S)	350 - 1500 (175 - 725)	2.01 - 2.87 (51.1 - 72.9)	2.25 - 3.45 (57.2 - 87.6)	3 (76)	10	52" (132 cm)	105" (266 cm)	Class (d) 53.7 mm/kV Very Heavy
7673-S- INV-10	1500 - 3000 (800 - 1500)	2.79 - 3.45 (70.9 - 87.6)	3.00 - 4.25 (76.2 - 108.0)	4 (102)	10	52" (132 cm)	105" (266 cm)	Class (d) 53.7 mm/kV Very Heavy
Inverted 10 skirt Termination Kit(s) w/WaterBlock								
7673-S-INV-10(R)-WB	1/0 - 350 (50 - 175)	1.30 - 2.36 (33.0 - 60.0)	1.60 - 2.85 (40.6 - 72.4)	2 (51)	10	49" (124 cm)	89" (226 cm)	Class (d) 53.7 mm/kV Very Heavy
7673-S-INV-10(S)-WB	350 - 1500 (175 - 725)	2.01 - 2.87 (51.1 - 72.9)	2.25 - 3.45 (57.2 - 87.6)	3 (76)	10	52" (132 cm)	105" (266 cm)	Class (d) 53.7 mm/kV Very Heavy
7673-S-INV-10-WB	1500 - 3000 (800 - 1500)	2.79 - 3.45 (70.9 - 87.6)	3.00 - 4.25 (76.2 - 108.0)	4 (102)	10	52" (132 cm)	105" (266 cm)	Class (d) 53.7 mm/kV Very Heavy

NOTE: Shearbolt lugs sold separately.

3M™ Mechanical Shearbolt Lugs for 69 kV / 72.5 kV

Shearbolt lugs from 3M help simplify installations with features like:

- Greater contact force
- No specialized tools required
- Centering rings for range taking
- Norm/standard: NEMA WC 70/71/74



3M™ Mechanical Shearbolt Two-Hole Lug QL-2 Series



3M™ Mechanical Shearbolt Four-Hole Lug QL-4 Series

3M™ Mechanical Shearbolt Lugs QL-2 (2 holes) and QL-4 (4 holes) Series 69 kV / 72.5 kV

3M Part	Number of holes	Conductor size range AWG kcmil (mm ²)	Stud size	Tongue width inches (mm)	Lug hole spacing (L x W) inches (mm)	Lug hole diameter	Outside diameter barrel inches (mm)	Lug length with centering rings inches (mm)	Lug I.D. inches (mm)
QL2-A-1/0-350	2	1/0 - 350 (54 - 177)	0.50 (13)	1.30 (33)	1.75 (44.5)	0.56 (14.2)	1.10 (28)	5.98 (152.0)	0.64 (16.3)
QL4-A-350-750	4	350 - 750 kcmil (177 - 380)	0.50 (13)	2.99 (76)	1.75 (44.5) x 1.75 (44.5)	0.56 (14.3)	1.65 (42)	7.24 (184)	1.03 (26.2)
QL4-A-600-1250	4	600 - 1250 kcmil (325 - 630)	0.50 (13)	2.99 (76)	1.75 (44.5) x 1.75 (44.5)	0.56 (14.3)	2.05 (52)	8.27 (210)	1.31 (33.3)
QL4-A-1500	4	1500 kcmil (800)	0.50 (13)	2.99 (76)	1.75 (44.5) x 1.75 (44.5)	0.56 (14.3)	2.56 (65)	8.50 (216)	1.41 (36)
QL4-A-1750-2000	4	1750 - 2000 kcmil (875 - 1000)	0.50 (13)	3.94 (100)	1.75 (44.5) x 1.75 (44.5)	0.56 (14.3)	2.56 (65)	11.22 (285)	1.65 (42)
QL4-A-2500-3000	4	2500 - 3000 kcmil (1300 - 1600)	0.50 (13)	3.94 (100)	1.75 (44.5) x 1.75 (44.5)	0.56 (14.3)	3.36 (85)	10.24 (260)	2.04 (52)

Cable Clamps and Mounting Plates

3M™ Termination Mounting Hardware - Cable Mounting Plates 69 kV / 72.5 kV

Kit number	Description	Application
MP-1	Cable/termination mounting plate	New construction
MP-1(L)	Cable/termination mounting plate	Retrofit/replacement

3M™ Termination Mounting Hardware - Cable Clamps 69 kV / 72.5 kV

Kit number	Description	Cable outer jacket O.D. range inches (mm)
CC-1(S)	Cast aluminum cable clamp - includes springs	3 - 4 (49.3 - 75.4 mm)
CC-2(S)	Cast aluminum cable clamp	4 - 5 (49.3 - 75.4 mm)



3M™ Cold Shrink QS-III Splice Kits for 69 kV / 72.5 kV

3M Cold Shrink Splice Kits for high voltage applications **meet or exceed the 69kV voltage class rating requirements of IEEE std. 404 and IEC 60840 for 72.5kV.**


Made of durable silicone rubber to provide reliable and long-lasting installations.

Cold Shrink Splice kits from 3M offer:


- **Safer, easier and more economical installations**
- **Covers a wide range of cable sizes for in-line, transition and cross-bond applications**
- **No specialized tools or torches**
- **Excellent electrical performance**
- **Shearbolt connector included in kit**



Typical dimensions (installed splice)

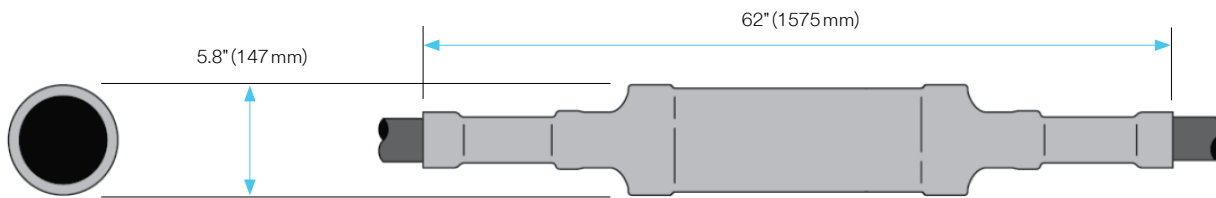

Parking distance (stacked)

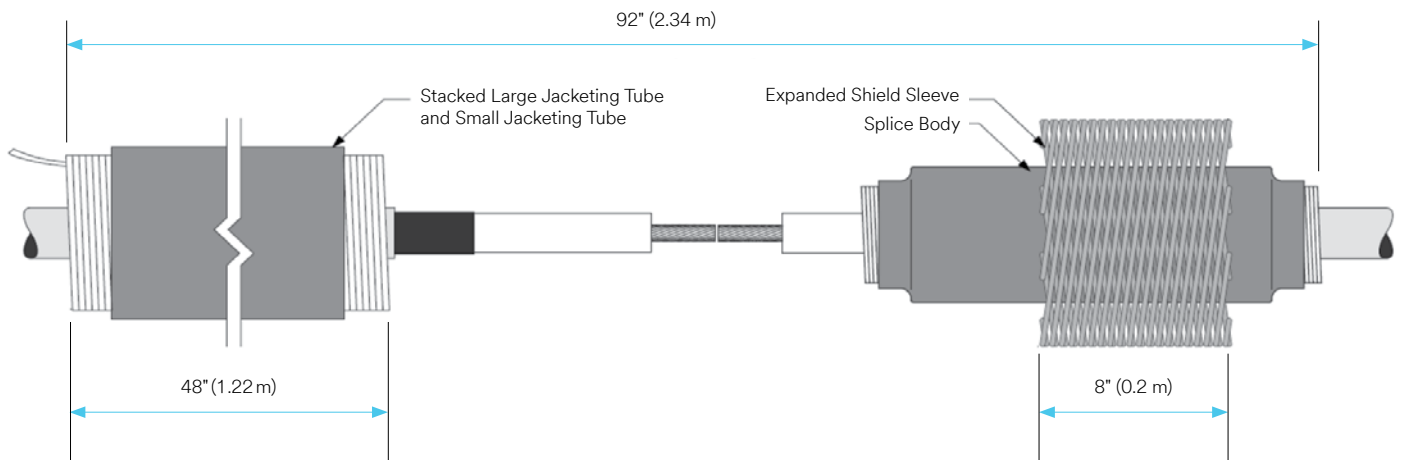



3M™ Cold Shrink QS-III Silicone Rubber Splice Kits 5488A, 5488A-JCN-XB, and 5488A-Shielded-XB for 69 kV / 72.5 kV

**Cu/Al Shearbolt Connector
Included in Standard Kits**

Kit Number	Stock Number	Description	Primary cable insulation O.D. range inches (mm)	Conductor size range AWG kcmil (mm ²)	Typical dimensions installed splice	Parking distance	Connector O.D.	Connector length	"XB" cross bond
5488A-250-500	80-6114-3386-5	69kV Cold Shrink QS-III Underground Splice for 250 - 500 Standard Wall Cable	1.94 - 3.08" (49.3 - 75.4 mm)	250 - 500 (125 - 325 mm ²)	62" L x 5.8" W (1575 x 147 mm)	92" (2.34 m)	1.94 - 2.50" (49.3 - 63.5 mm)	8" ± 0.10" (203 ± 2.54 mm)	—
5488A-750-1000	80-6114-3387-3	69kV Cold Shrink QS-III Underground Splice for 750 - 1000 Standard Wall Cable	1.94 - 3.08" (49.3 - 75.4 mm)	750 - 1000 (400 - 500 mm ²)	62" L x 5.8" W (1575 x 147 mm)	92" (2.34 m)	1.94 - 2.50" (49.3 - 63.5 mm)	8" ± 0.10" (203 ± 2.54 mm)	—
5488A-1250-1500	80-6114-3388-1	69kV Cold Shrink QS-III Underground Splice for 1250 - 1500 Standard Wall Cable	1.94 - 3.08" (49.3 - 75.4 mm)	1250 - 1500 (655 - 800 mm ²)	62" L x 5.8" W (1575 x 147 mm)	92" (2.34 m)	2.51 - 3.25" (63.6 - 75.4 mm)	9.25" ± 0.10" (235 ± 2.54 mm)	—
5488A-1750-2000	80-6114-3389-9	69kV Cold Shrink QS-III Underground Splice for 1750 - 2000 Standard Wall Cable	1.94 - 3.08" (49.3 - 75.4 mm)	1750 - 2000 (875 - 1000 mm ²)	62" L x 5.8" W (1575 x 147 mm)	92" (2.34 m)	2.51 - 3.25" (63.6 - 75.4 mm)	9.25" ± 0.10" (235 ± 2.54 mm)	—
5488A-XB-JCN-250-500	80-6114-3390-7	69kV JCN X-Bond Cold Shrink QS-III Underground Splice for 250 - 500 JCN Standard Wall Cable	1.94 - 3.08" (49.3 - 75.4 mm)	250 - 500 (125 - 325 mm ²)	62" L x 5.8" W (1575 x 147 mm)	92" (2.34 m)	1.94 - 2.50" (49.3 - 63.5 mm)	8" ± 0.10" (203 ± 2.54 mm)	Yes - JCN Cable
5488A-XB-JCN-750-1000	80-6114-3391-5	69kV JCN X-Bond Cold Shrink QS-III Underground Splice for 750 - 1000 JCN Standard Wall Cable	1.94 - 3.08" (49.3 - 75.4 mm)	750 - 1000 (400 - 500 mm ²)	62" L x 5.8" W (1575 x 147 mm)	92" (2.34 m)	1.94 - 2.50" (49.3 - 63.5 mm)	8" ± 0.10" (203 ± 2.54 mm)	Yes - JCN Cable
5488A-XB-JCN-1250-1500	80-6114-3392-3	69kV JCN X-Bond Cold Shrink QS-III Underground Splice for 1250 - 1500 JCN Standard Wall Cable	1.94 - 3.08" (49.3 - 75.4 mm)	1250 - 1500 (655 - 800 mm ²)	62" L x 5.8" W (1575 x 147 mm)	92" (2.34 m)	2.51 - 3.25" (63.6 - 75.4 mm)	9.25" ± 0.10" (235 ± 2.54 mm)	Yes - JCN Cable
5488A-XB-JCN-1750-2000	80-6114-3393-1	69kV JCN X-Bond Cold Shrink QS-III Underground Splice for 1750 - 2000 JCN Standard Wall Cable	1.94 - 3.08" (49.3 - 75.4 mm)	1750 - 2000 (875 - 1000 mm ²)	62" L x 5.8" W (1575 x 147 mm)	92" (2.34 m)	2.51 - 3.25" (63.6 - 75.4 mm)	9.25" ± 0.10" (235 mm ± 2.54 mm)	Yes - JCN Cable
5488A-XB-Shielded-250-500	80-6114-4997-8	69kV Shielded X-Bond Cold Shrink QS-III Underground Splice for 250 - 500 Shielded Standard Wall Cable	1.94 - 3.08" (49.3 - 75.4 mm)	250 - 500 (125 - 325 mm ²)	62" L x 5.8" W (1575 x 147 mm)	92" (2.34 m)	1.94 - 2.50" (49.3 - 63.5 mm)	8" ± 0.10" (203 ± 2.54 mm)	Yes - Shielded Cable
5488A-XB-Shielded-750-1000	80-6114-4998-6	69kV Shielded X-Bond Cold Shrink QS-III Underground Splice for 750 - 1000 Shielded Standard Wall Cable	1.94 - 3.08" (49.3 - 75.4 mm)	750 - 1000 (400 - 500 mm ²)	62" L x 5.8" W (1575 x 147 mm)	92" (2.34 m)	1.94 - 2.50" (49.3 - 63.5 mm)	8" ± 0.10" (203 ± 2.54 mm)	Yes - Shielded Cable
5488A-XB-Shielded-1250-1500	80-6114-4999-4	69kV Shielded X-Bond Cold Shrink QS-III Underground Splice for 1250 - 1500 Shielded Standard Wall Cable	1.94 - 3.08" (49.3 - 75.4 mm)	1250 - 1500 (655 - 800 mm ²)	62" L x 5.8" W (1575 x 147 mm)	92" (2.34 m)	2.51 - 3.25" (63.6 - 75.4 mm)	9.25" ± 0.10" (235 ± 2.54 mm)	Yes - Shielded Cable
5488A-XB-Shielded-1750-2000	80-6114-5000-0	69kV Shielded X-Bond Cold Shrink QS-III Underground Splice for 1750 - 2000 JCN Standard Wall Cable	1.94 - 3.08" (49.3 - 75.4 mm)	1750 - 2000 (875 - 1000 mm ²)	62" L x 5.8" W (1575 x 147 mm)	92" (2.34 m)	2.51 - 3.25" (63.6 - 75.4 mm)	9.25" ± 0.10" (235 ± 2.54 mm)	Yes - Shielded Cable

NOTE: Shearbolt connector is included in Kit.

High Voltage Accessory Installation History

A legacy of enhanced performance.

For over 40 years, electrical installers from around the world have depended on 3M™ Cold Shrink technology for their fast, easy and reliable connections.

69 kV / 72.5 kV Class Accessories

- First install 2009
- + 9,000 kits installed globally

115 kV / 123 kV Class Accessories

- First install in 2004
- +8,500 kits installed globally

138 kV / 145 kV Class Accessories

- First installation 2008
- +4,000 kits installed globally



Global High Voltage underground support from start to finish.

- Global Presence
- Customized Solutions
- Onsite Technical and Customer Support
- Onsite Classroom and Field Installation Training
- Online back-up support documentation / installation videos at www.3M.com/highvoltage

With 60+ years of industry experience in 64 international subsidiaries and Operations in 200+ countries, we can work with you getting the expert support where you need it – when you need it.

The information in this brochure is accurate, to 3M's knowledge and belief, which may be based on information provided by third party suppliers to 3M.

Important Notice:

Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.

Warranty; Limited Remedy; Limited Liability

This product will be free from defects in material and manufacture from the time of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any loss or damage arising from this 3M product, whether direct, indirect, special, incidental or consequential regardless of the legal theory asserted.**



Electrical Markets Division

6801 River Place Blvd.
Austin, TX 78726-9000 USA

3M Customer Service (U.S.)
Phone: 800.245.3573

3M Medium Voltage/High Voltage Hotline (U.S.)
Phone: 512.984.5000
Web: 3M.com/highvoltage

3M is a trademark of 3M Company.
NEMA is a registered trademark of the
National Electrical Manufacturers Association.
© 3M 2025. All rights reserved.
80-6016-0865-8 HB14179