


3M™ Ceramic Sand Screen deployed on coiled tubing assured fast return on investment

Gaining incremental production from existing well paying back within 5 days

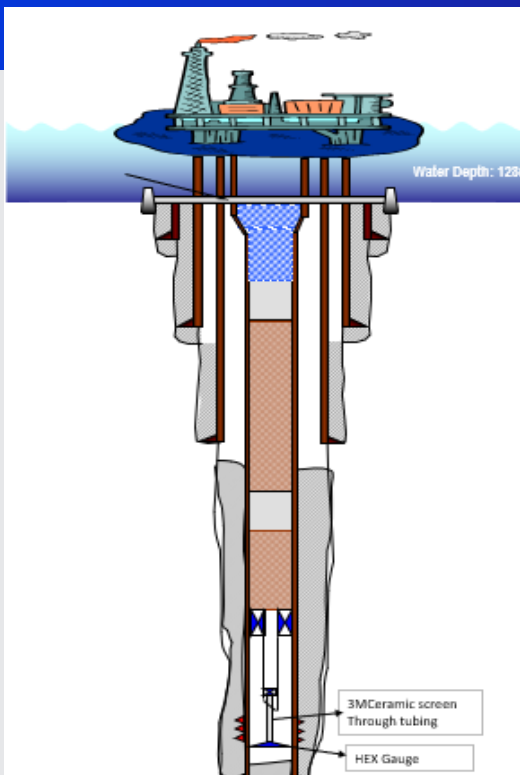

Customer challenge

Reservoir depletion reached the point when sand production started to occur, and the operator had to restrict the flow rate to achieve sand-free production. The well had no sand control in place. Operator was looking for a cost-effective sand control solution which could offer the possibility to increase production rate in high flux and impingement velocities environment. Another challenge was poorly sorted sand with a high content of fines.

The cased hole gravel pack option was rejected due to the high cost and increased complexity.



Challenge

Operator was looking for a cost-effective sand control solution which could offer the possibility to increase production rate in high flux and impingement velocities environment.



Solution

The screen with 2 3/8" base pipe and 3.6" max OD was selected to assure a smooth deployment through minimum well restriction.



Key Features

- Deployment on coiled tubing
- Screens straddled across the perforations
- Erosion & Hot spotting resistance
- Maintain slot opening
- Corrosion resistant filter media



Application Reservoir PSD

- Uc (d40/d90)= 8 to 16
- Sc (d10/d95)= 40 to 72
- Fines (<44µm) = 16% to 29%



Location

Caspian Sea

Why Ceramics?

Metallic sand screens tend to fail rapidly in highly erosive environments.

Changing filter media material to ceramics (non-oxide silicon carbide) provides extreme resistance to erosion leading to increased production rates and period.

Solution offered

3M™ Ceramic Sand Screens previously had a successful track record with this operator in another location and were chosen to address the given challenges. The screen with 2 3/8" base pipe and 3.6" max OD was selected to assure a smooth deployment through minimum well restriction. Total BHA assembly of 376ft with actual screen length of 203 ft was run through 5 1/2" tubing and set inside 9 5/8" casing with high expansion gauge at the bottom.

Deployment was performed with coiled tubing unit over 2 runs. The high expansion gauge was set at the required depth following with Ceramic Sand Screens landed on it and set across the perforations.

Customer value

Operator fulfilled the goal of increased production through a cost-effective retrofit solution deployed on coiled tubing

Well producing at 7800 BOPD with ca. 14 MMSCFD Gas. Ca. 2000 BOPD production increase from initial rate

3M Ceramic Sand Screens pay-back in 5 days based on incremental oil production

Sand control maintained at higher drawdown

Technical references

SPE-176225-MS: Cased Hole Ceramic Screen Cutting Completion Cost for Marginal Reservoir: Application in Tunu Field

OTC-25106-MS: An Innovative Approach of Revival for Damaged Wells in High Erosive Environment Using Ceramic Sand Screens – BG Group

SPE 146721: An Innovative Milestone in Sand Control – Maersk Oil & Gas

SPE 160327: Ceramic Sand Screens for Sand Control in Unconsolidated Reservoirs (with Fines Content) – RAG

SPE 166092-MS: Ceramic Sand Screen: Ceramic Sand Screen – An Innovative Downhole Sand Control Solution for Old and Challenging Cased Holes – BG Group

MOC-Egypt- April 2016: Ceramic Sand Screen Systems - A Unique Down-Hole Solution for Sand Control

Sand Control with Ceramic Screens in Unconsolidated Reservoirs Demonstrated in the Mature Gaiselberg Oilfield. **OIL GAS European Magazine**, 2/2012, p. 74–78

SPE-182278-MS: Sand Control in Corrosive and Erosive Downhole Conditions at High Temperatures- 3M Technical Ceramics



3M Technical Ceramics
Zweigniederlassung der 3M Deutschland GmbH
Max-Schaidhauf-Str. 25, 87437
Kempten, Germany

3m.com/ceramicsandscreens

3M Advanced Materials Division
3M Center
St. Paul, MN 55144 USA

3m.com/advancedmaterials

The management system has been certified according to DIN EN ISO 9001, DIN EN ISO 50001, DIN EN ISO 14001.

3M is a trademark of 3M Company.

Please recycle. © 3M 2020.
All rights reserved. Issued: 10/2020