


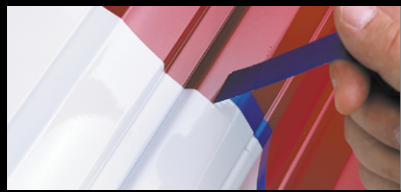













3M™ Masking Tapes

														
Product number	101E	201E	301E	401E	501E	2814	244	218	8901	8902	8905	8991	8992	8995
Properties/suitable for	Value mask- ing tape	General use masking tape	Performance masking tape	High performance masking tape	Specialty high temper- ature masking tape	UV Resistant 14 Days. Crisp paint lines.	UV Resistant 30 Days. Sharp paint lines.	Fine line masking tape	Performance powder coat painting	Performance powder coat painting	Performance powder coat painting	Masking in extreme environ- ments	Masking in extreme environ- ments	Masking in extreme environ- ments
Key features														
Shop														

Do you have a tape or adhesive challenge?
Do you need help finding the right product for your project?

Available from:

Product Use

All statements, technical information, and recommendations contained in this document are based upon tests or experience that 3M believes are reliable and are average values not to be used for specification purposes. However, many factors beyond 3M's control can affect the use and performance of a 3M product in a particular application, including the conditions under which the product is used and the time and environmental conditions in which the product is expected to perform. Since these factors are uniquely within the user's knowledge and control, it is essential that the user evaluates the 3M product to determine whether it is fit for a particular purpose and suitable for the user's method or application. All questions of liability relating to this product are governed by the terms of the sale subject, where applicable, to the prevailing law.