



Technical Data Sheet

3M™ Damping Aluminum Foam Sheet 4014



[Product Details](#)



[Regulatory Info/SDS](#)

Product Description

3M™ Damping Aluminum Foam Sheet 4014 is an open-cell polyurethane foam with an aluminum constraining layer on one side and a pressure sensitive adhesive on the opposite side to facilitate attachment to the surface of the vibrating panel. The adhesive is protected by an easy-release liner.

How it works:

Strain energy from the vibrating panel is introduced into the viscoelastic foam. The strain in the foam is in shear as a result of the aluminum constraining layer. The viscous portion of the response of viscoelastic foam results in mechanical energy being dissipated to negligible heat. This energy dissipation results in (1) attenuated amplitudes of vibration when systems are being continuously excited at frequencies which match their natural frequencies, or (2) more rapid decay in systems that are freely oscillating at their natural frequencies as a result of a momentary excitation such as an impact.

Product Features

- Excellent damping per pound of material used and installed cost ratio.
- Easy to apply - only hand pressure required.
- Good thermal insulator and heat reflector.
- Excellent moisture resistance, aging properties and fatigue resistance.
- Meets Federal Air Regulation Flammability Specifications for acoustical insulation materials (FAR Section 25.853, Paragraph B).

Technical Information Note

The following technical information and data should be considered representative or typical only and should not be used for specification purposes.


Typical Physical Properties

Attribute Name	Test Method	Value
Weight		1.32 kg/m ² (0.27 lb/ft ²)
Total Thickness	ASTM D3652	6.35 mm (250 mil)
Moisture Resistance		Less than 0.25% weight gain (When conditioned at 150°F/67°C and 100% RH for one week).

Typical Damping Properties

The figure below illustrates the damping measured on 2 of the bending modes of a stainless steel cantilever beam when 3M damping aluminum foam sheet 4014 is attached to the surface of the beam. The damping is measured as a function of temperature and is compared to an untreated beam. This damping was determined by the half power band width technique on frequency response functions measured with a Fast Fourier Transform Analyzer.

3M™ Damping Aluminum Foam Sheet 4014
Test on 7 in. x 1/2 in. x 0.060 in. Stainless Steel Beam

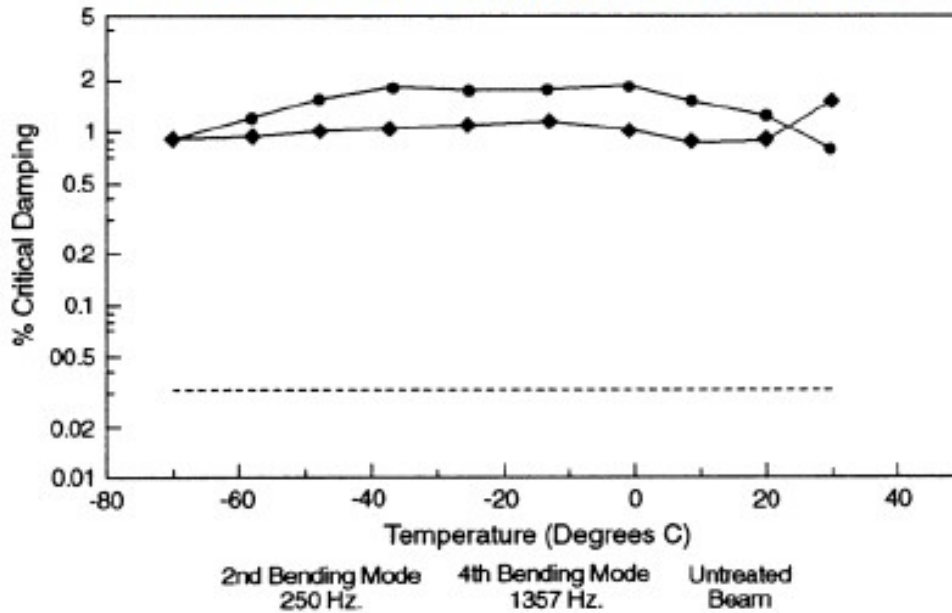

Electrical and Thermal Properties

Attribute Name	Value
Thermal Conductivity	0.069 W/m/°C (0.48 (btu-in)/(h-ft ² -°F))

Handling/Application Information

Application Examples

- Reduce resonant noise, vibration and fatigue in metal, plastic panels and support structures.
- Almost anywhere plastic or metal contact with materials that can result in potentially damaging vibration.

Application Techniques

3M™ Damping Aluminum Foam Sheet 4014 contains an aggressive pressure sensitive adhesive to facilitate bonding to the surface of the structure. Best results are obtained when applied at temperatures above 50°F (10°C) on a clean, dry surface (free of oil, wax, dust, rust, etc.) and the bond is continuous (void-free) throughout the interface between 3M damping aluminum foam sheet 4014 and the structure.

For best results apply as follows:

1. Clean metal surface of structure with appropriate solvent for removing any surface contaminants such as processing oils or waxes.

Note:When using solvents, be sure to extinguish ignitions sources and follow the manufacturer’s precautions and directions for use when handling such materials.

2. Wipe the clean surface of the structure to complete dryness with a clean, dry lint free cloth.

Note:Steps 1 and 2 should be repeated until the used drying cloth is clean (no more residue appears on the cloth after wiping).

3. Remove the protection liner.

4. Place one edge on the surface of the structure and press into place with finger pressure. Lower the rest of the foam piece into place while applying finger pressure on the bond line as it progresses across the surface of the structure. This method of application will minimize voids in the pressure sensitive bond.

Certifications/Standards

Federal Aviation Regulations, FAR 25.853

3M™ Damping Aluminum Foam Sheet 4014 FAR (Federal Air Regulation) Section 25.853 Compartment Interiors
We have classified our 3M damping aluminum foam sheet 4014 construction within paragraph (B) of the subject FAR Section as it is included in the class of acoustical insulation materials. As such, it must be self extinguishing when tested vertically in accordance with the applicable portions of Appendix F (Acceptable Test Procedure for showing compliance 25.853).

Specimen samples of 3M damping aluminum foam sheet 4014 were prepared in accordance with paragraph (B) of Appendix F. "Materials must be tested either as a section cut from a fabricated part as installed in the airplane or as a specimen simulating a cut section." Samples of 3M damping aluminum foam sheet 4014 (3 in x 12 in) were applied to 20-mil aluminum panels of the same size to meet this requirement. The apparatus used to conduct this testing was as specified in Paragraph (C) of Appendix F.

Industry Specifications

FAR (Federal Air Regulation) Section 25.853, Paragraph B

Storage and Shelf Life

Store under normal conditions of 16° to 27°C (60° to 80°F) and 40 to 60% relative humidity in the original packaging, out of direct sunlight. For best performance, use this product within 24 months from date of manufacture.

Automotive Disclaimer

Select Automotive Applications:

This product is an industrial product and has not been designed or tested for use in certain automotive applications, such as automotive electric powertrain battery or high voltage applications, which may require the product to be manufactured in a IATF certified facility, meet a Ppk of 1.33 for all properties, undergo an automotive production part approval process (PPAP), or fully adhere to automotive design or quality system requirements (e.g., IATF 16949 or VDA 6.3). Customer assumes all responsibility and risk if customer chooses to use this product in these applications.

Information

Technical Information: The technical information, guidance, and other statements contained in this document or otherwise provided by 3M are based upon records, tests, or experience that 3M believes to be reliable, but the accuracy, completeness, and representative nature of such information is not guaranteed. Such information is intended for people with knowledge and technical skills sufficient to assess and apply their own informed judgment to the information. No license under any 3M or third party intellectual property rights is granted or implied with this information.

Product Selection and Use: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. As a result, customer is solely responsible for evaluating the product and determining whether it is appropriate and suitable for customer's application, including conducting a workplace hazard assessment and reviewing all applicable regulations and standards (e.g., OSHA, ANSI, etc.). Failure to properly evaluate, select, and use a 3M product and appropriate safety products, or to meet all applicable safety regulations, may result in injury, sickness, death, and/or harm to property.

Warranty, Limited Remedy, and Disclaimer: Unless a different warranty is specifically stated on the applicable 3M product packaging or product literature (in which case such warranty governs), 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR ARISING OUT OF A COURSE OF DEALING, CUSTOM, OR USAGE OF TRADE. If a 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

Limitation of Liability: Except for the limited remedy stated above, and except to the extent prohibited by law, 3M will not be liable for any loss or damage arising from or related to the 3M product, whether direct, indirect, special, incidental, or consequential (including, but not limited to, lost profits or business opportunity), regardless of the legal or equitable theory asserted, including, but not limited to, warranty, contract, negligence, or strict liability.

Disclaimer: 3M industrial and occupational products are intended, labeled, and packaged for sale to trained industrial and occupational customers for workplace use. Unless specifically stated otherwise on the applicable product packaging or literature, these products are not intended, labeled, or packaged for sale to or use by consumers (e.g., for home, personal, primary or secondary school, recreational/sporting, or other uses not described in the applicable product packaging or literature), and must be selected and used in compliance with applicable health and safety regulations and standards (e.g., U.S. OSHA, ANSI), as well as all product literature, user instructions, warnings, and limitations, and the user must take any action required under any recall, field action or other product use notice. Misuse of 3M industrial and occupational products may result in injury, sickness, or death. For help with product selection and use, consult your on-site safety professional, industrial hygienist, or other subject matter expert. For additional product information, visit www.3M.com.

ISO Statement

This product was manufactured under a 3M quality system registered to ISO 9001 standards.

3M™ Industrial Adhesives and Tapes Division
3M Center, St. Paul, MN 55144-1000
3M.com/iatd

©3M (1/16)