




Cubitron™ 3

Performance Abrasives

Produce more. With less.

3M™ Cubitron™ 3 Fibre Discs and Roloc™

Breakthroughs in technology that redefine the limits of cut rate and total stock removal, with a focus on prioritising productivity, safety, sustainability, and optimising automation.

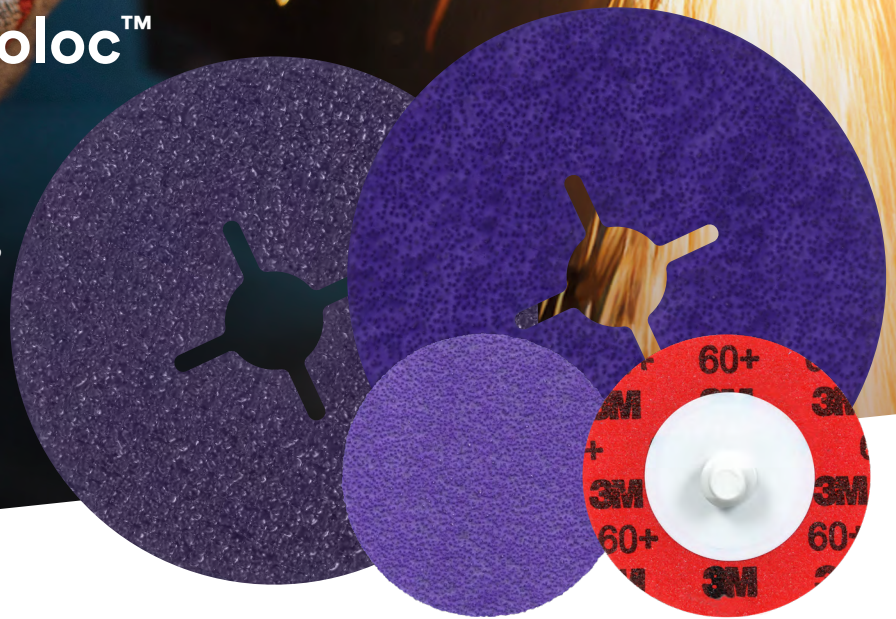

Now 36+, 60+ and 80+ grades available!

3M™ Cubitron™ 3 Fibre Discs 1182C and 1187C
3M™ Cubitron™ 3 Roloc™ 1184F, 1182C and 1187C

A new era of abrasive performance is here.

Introducing 3M re-engineered Precision-Shaped Grain, boosting the speed and life of 3M™ Cubitron™ Performance Abrasives to new heights. This advancement prioritises operator safety, maximises sustainability, and amplifies time and labour efficiency.

3M™ Cubitron™ 3 Fibre Disc 1182C, 36+


Up to

60%

→ Faster sustained cut rate

→ More total material removed

vs. 3M™ Cubitron™ II Fibre Disc 982C, 36+

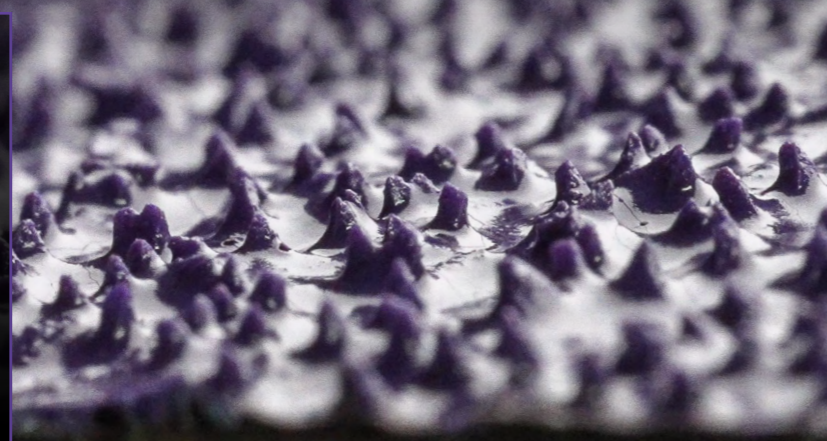

Enhanced mineral orientation

Re-shaping the way work gets done.



Our latest 3M Precision-Shaped Grain




Re-engineered precision-shaped ceramic triangular grain using a proprietary breakthrough in grain shape. This helps increase productivity and lower overall grinding costs.

3M Precision-Shaped Grain

3M pioneered the first precision-shaped grain using 3M microreplication technology to form consistent sharp peaks that easily “slice” through metal—cutting cooler, faster, and lasting longer than conventional abrasive grain.

Conventional ceramic abrasive

Conventional ceramic abrasive grain tends to “plough” through metal, causing heat to build up in the workpiece and abrasive, resulting in a slower cut and shorter abrasive life compared to our latest precision-shaped grain.

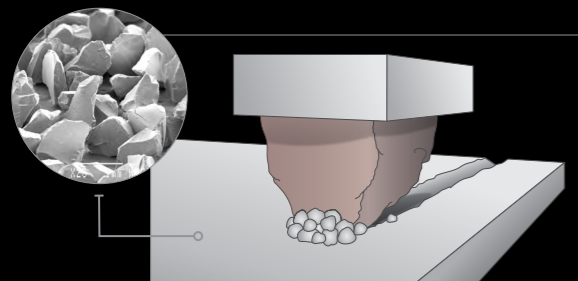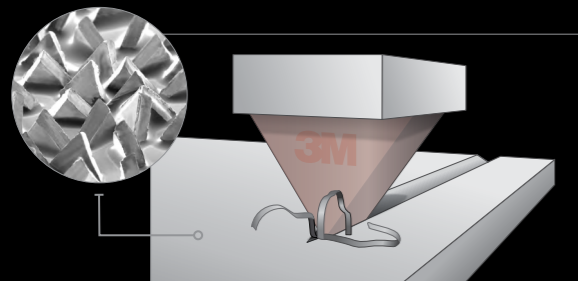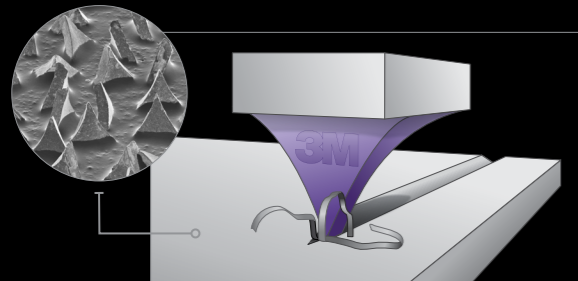

Ideal for heavy grinding applications.

By using long-lasting, fast-cutting 3M™ Cubitron™ 3 Performance Abrasives, you can minimise abrasive changeover to save money over time. A stiff fibre backing and a strong resin bond provide durability and tear-resistance for heavy grinding applications from beveling, weld grinding, surface grinding to deburring, and flame cut smoothing. In each application the product grinds more freely and at lower temperatures, helping to reduce job times, operator fatigue and minimise rework.



Beveling



Surface grinding



Flame cut smoothing



Weld grinding

Industries: ▶ Metal fabrication ▶ Machinery manufacturing ▶ Shipyards




Proven to change the game for your process.

3M™ Cubitron™ 3 Fibre Disc 1182C

Mild steel grinding

Grade **36+**

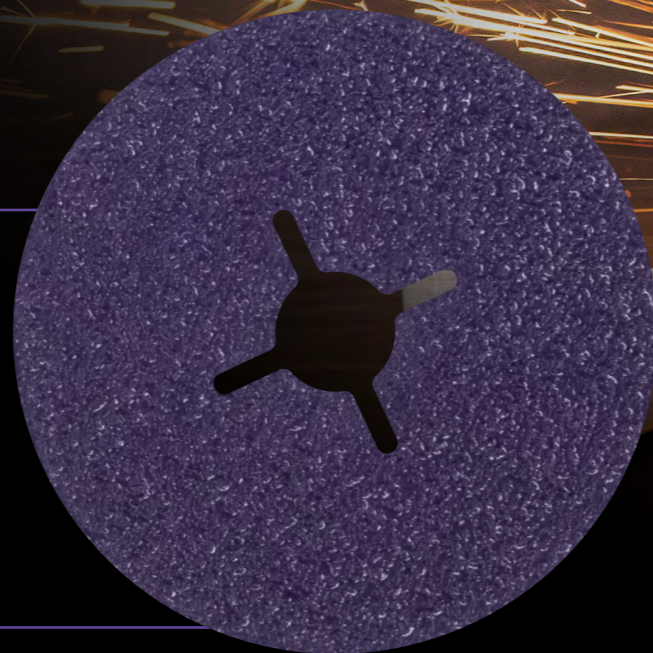

Grade 36+

We tested 3M™ Cubitron™ 3 Fibre Disc 1182C, 36+ and here are the results:

Productivity Delivered



More total material removed

Longer lasting abrasives with fewer changeouts needed and less downtime



Less operator fatigue

Prioritize workplace wellbeing and motivation with less pressure required on the tool



Cool cutting

Helps to reduce metal discoloration and stress cracks — ultimately minimizing re-work



Faster cut rate

Incredibly fast cut rate helps to increase throughput, maximize productivity and boost your bottom line



Less vibration exposure


Helps improve workplace safety without compromising productivity




Sustainability at the core

Longer-lasting abrasives and recycled shipper packaging helps reduce carbon footprints and waste


Up to **36%** Faster sustained cut rate¹

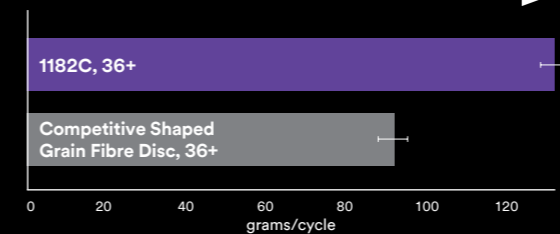

Up to **34%** More total material removed¹

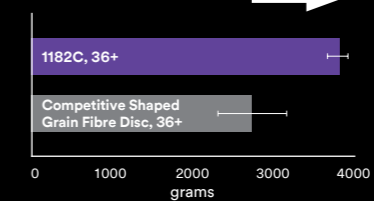


Up to **3X** Faster initial cut rate²




Helps improve workplace safety without compromising productivity.

Safety Built In


Up to **88%** Less vibration exposure²

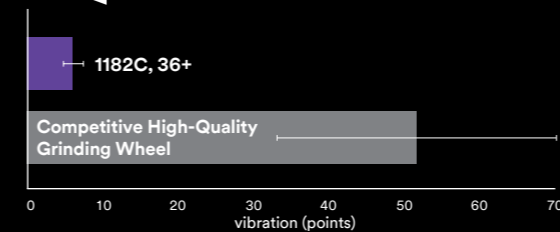

Up to **70%** Less noise energy generated³

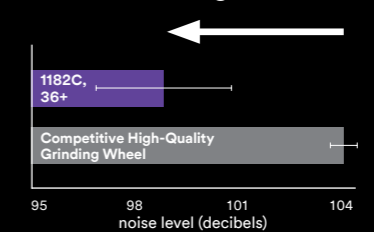

Up to **47%** Less vibration exposure⁴



Error bars represent the results with a 95% confidence level.

¹ Compared to Competitive Shaped Grain Fibre Disc. Results are based on an automated, 30-minute, high pressure test on 1018 steel using 7 inch, 36+ grit fibre discs and 3M™ Disc Pad Face Plate Ribbed 80514 on a servo motor.


² Performance testing in a typical weld preparation process; 3M™ Cubitron™ 3 Fibre disc average compared to the average result of 10 globally available high-quality competitive shape type-27 Grinding wheels including ceramic grain products, according to independent testing by Fraunhofer Institute. January 2024. **

³ Noise energy operator exposure testing in a typical weld preparation process; Cubitron™ 3 Fibre disc average compared to the average result of 10 globally available high-quality competitive shape type-27 Grinding wheels including ceramic grain products, according to independent testing by Fraunhofer Institute. January 2024.

⁴ Performance testing in a typical weld preparation process; 3M™ Cubitron™ 3 Fibre disc average compared to the average result of 5 globally available high-quality competitive Fibre discs including ceramic shaped grain products, according to independent testing by Fraunhofer Institute. January 2024.

⁵ Average result from 10 high-quality globally represented competitive Grinding wheels including ceramic grain products. Error bars shows a range of likely values for the mean with a confidence level of 95%.

Independent hazards testing performed by:

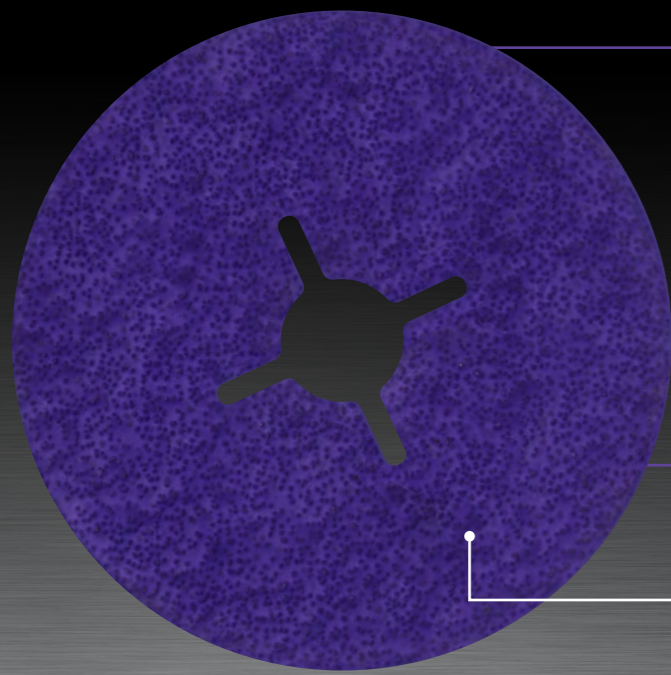

3M™ Cubitron™ 3 Fibre Disc 1187C

Stainless steel grinding

Grade **36+**


Coated with a grinding aid

Reduces the risk of discoloration from thermal damage in heat sensitive metals

3M™ Cubitron™ 3 Fibre Disc 1182C

Mild steel grinding

Grades **60+ & 80+**

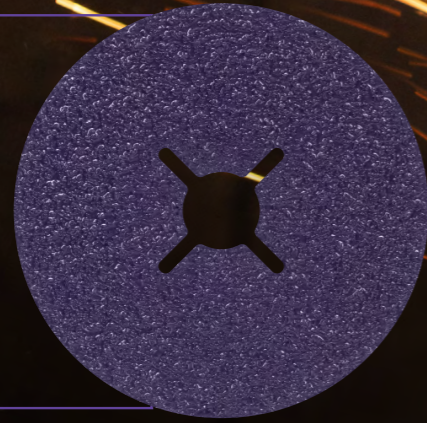

NEW!

3M™ Cubitron™ 3 Fibre Disc 1187C

Stainless steel grinding

Grades **60+ & 80+**



NEW!

We tested 3M™ Cubitron™ 3
Fibre Disc 1182C 60+ and 80+,
and here are the results:


Productivity
Delivered

We tested 3M™ Cubitron™ 3
Fibre Disc 1187C 60+ and 80+,
and here are the results:


Productivity
Delivered

Grade 60+

Up to
38% More total
material
removed¹

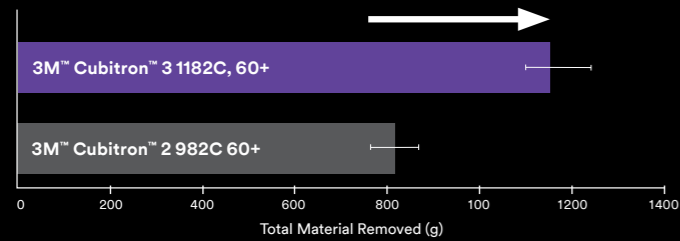


Up to
42% Faster
sustained
cut rate²

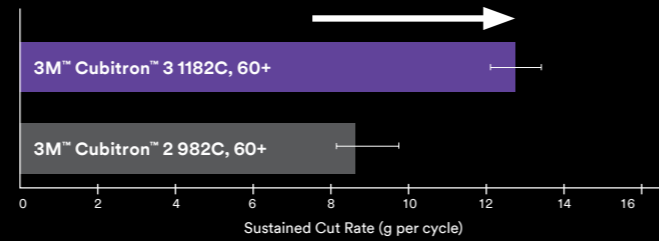


Grade 60+

Up to
57% More total
material
removed¹

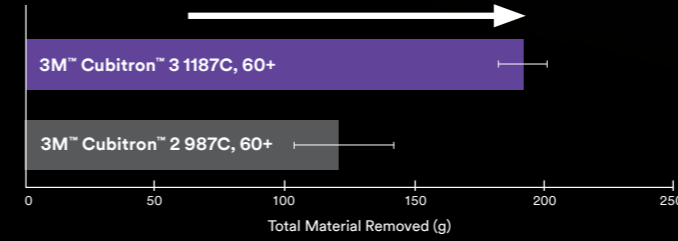


Up to
58% Faster
sustained
cut rate²

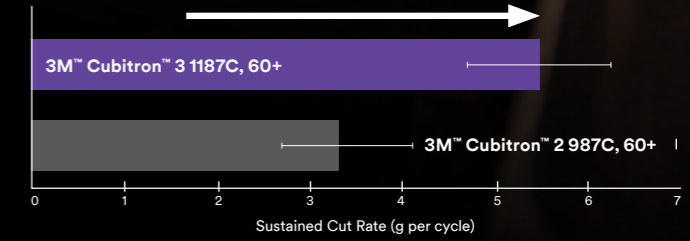


Grade 80+

Up to
29% More total
material
removed¹

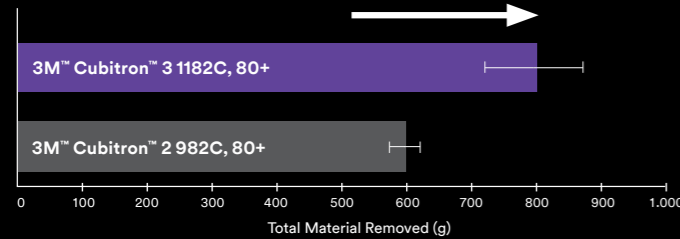


Up to
32% Faster
sustained
cut rate²

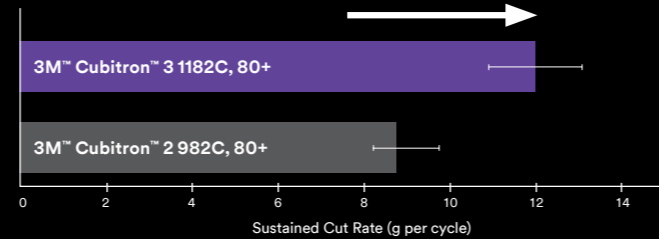


Grade 80+

Up to
48% More total
material
removed¹

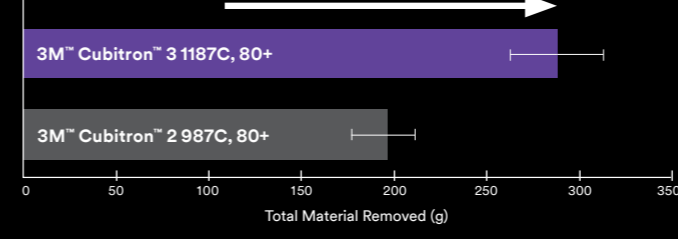

Up to
42% Faster
sustained
cut rate²

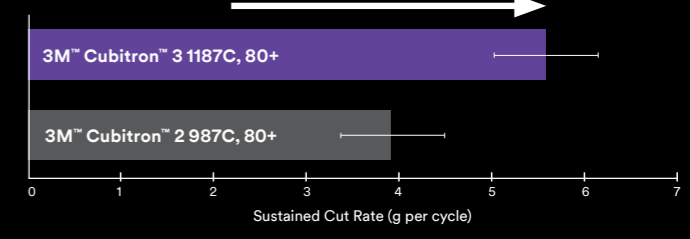

Total Material Removed:
60+ Carbon Steel: The 'total material removed' claim is determined by averaging the amount of metal ground over 100 cycles, approximately 42 minutes of grinding.
80+ Carbon Steel: The 'total material removed' claim is determined by averaging the amount of metal ground over 70 cycles, approximately 30 minutes of grinding.

Units for carbon steel will be Grams
Each cycle for the carbon steel test method = 25.3 seconds of grinding per cycle

Sustained Cut Rate:
60+ & 80+ Carbon Steel: The 'sustained cut rate' claim is determined from averaging the cut/cycle from cycles 11-50 (40 cycles total, which is approximately 17 minutes of grinding)

Total Material Removed:
60+ Stainless Steel: The 'total material removed' claim is determined by averaging the amount of metal ground over 40 cycles, approximately 8.5 minutes of grinding.
80+ Stainless Steel: The 'total material removed' claim is determined by averaging the amount of metal ground over 72 cycles, approximately 15 minutes of grinding.

Units for stainless steel will be Grams
Each cycle for the stainless steel test method = 12.7 seconds of grinding per cycle

Sustained Cut Rate:
60+ & 80+ Stainless Steel: The 'sustained cut rate' claim is determined from averaging the cut/cycle from cycles 5-24 (20 cycles total, which is approximately 4 minutes of grinding)
Units for stainless steel will be (Grams/cycle)


3M™ Cubitron™ 3 Roloc™ Fibre Discs

The benefits of the Roloc™ attachment

3M™ Roloc™ Abrasive Discs are smaller discs that quickly attach onto a Roloc™ disc pad so that you can conveniently and rapidly change discs as needed. Our system provides a secure attachment

even for heavy-duty applications. Disc buttons are also color-coded when needed to identify its grade, making it easy to select the grade required for different applications.

- ▶ Remote applications
- ▶ Retain extra control
- ▶ Localized, refining, finishing
- ▶ Corner or curved surfaces
- ▶ Intricate, difficult to reach areas
- ▶ Remove weld splatter on small areas

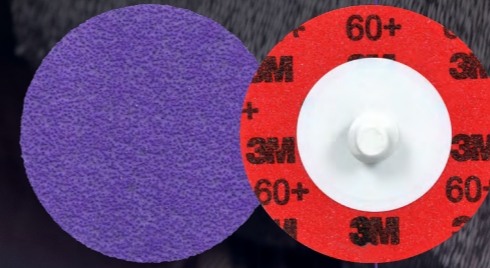


3M™ Cubitron™ 3 Roloc™ Durable Edge Disc 1184F

Stainless steel and other heat-sensitive alloys.

Designed for metalworking applications where flexibility is required and wear resistance in edge work is needed as well as weld grinding, beveling, and deburring.

Grades 36+, 60+ & 80+

NEW!

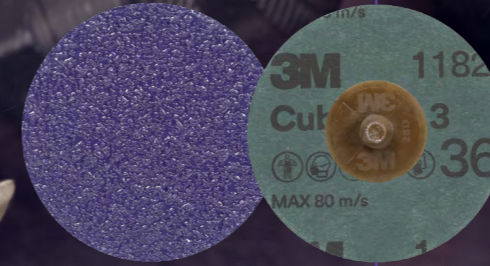


3M™ Cubitron™ 3 Roloc™ Fibre Disc 1182C

Carbon steel grinding

Outstanding performance and productivity for medium to high pressure grinding applications on carbon steel when a smaller sized disc is needed.

Grades 36+, 60+ & 80+

NEW!

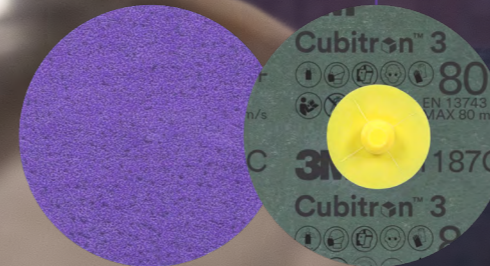

3M™ Cubitron™ 3 Roloc™ Fibre Disc 1187C

Stainless steel, cobalt chrome, and nickel alloy applications.


Long-lasting disc offering a fast cut rate with high stock removal across a wide range of application pressures

Grades 36+, 60+ & 80+

NEW!

Productivity Delivered

Grinding and stock removal

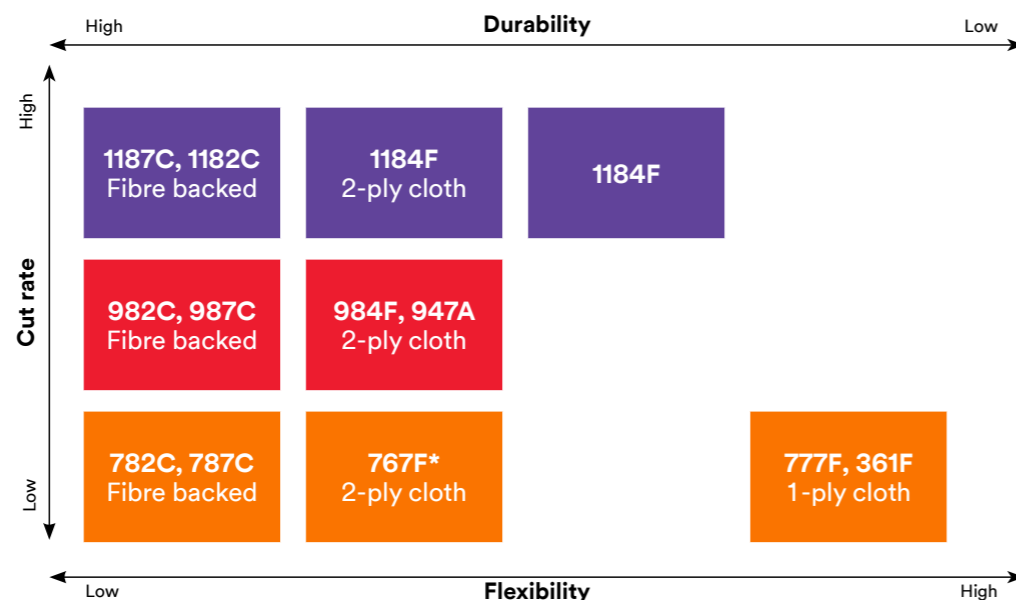

3M™ Roloc™ Disc button color/grade guide

CB3 Fibre Disc	Color	Grade
1184F Durable edge	○ White	All*
1182C 1187C	● Brown	36+
	● Orange	60+
	● Yellow	80+

Optimum tool speed to maximize 3M™ Roloc™ Disc cut rates and life

Disc size	Substrate			
	Carbon Steel	Stainless Steel	Titanium	Aluminium
50mm	20.000rpms	15.000rpms	7.000rpms	20.000rpms
75mm	15.000rpms	10.000rpms	4.500rpms	15.000rpms

3M™ Roloc™ Attachment System



CB3 Fibre Disc	Size (mm)	TR
1184F	50	●
	75	●
1182C	50	●
	75	●
1187C	50	●
	75	●

*Ask for other dimensions availability.



TR plastic button

Product Ordering Information



3M™ Cubitron™ 3 Fibre Disc 1182C

Product ID	Grade	Diameter (mm)	Max RPM	Unit/Case
7100309905	36+	100 × 16	15,300	25/100
7100308530	36+	115 × 22	13,300	25/100
7100308531	36+	125 × 22	12,250	25/100
7100309794	36+	180 × 22	8,500	25/100
NEW 7100349563	60+	100 × 16	15,300	25/100
NEW 7100349583	60+	115 × 22	13,300	25/100
NEW 7100349498	60+	125 × 22	12,250	25/100
NEW 7100349667	60+	180 × 22	8,500	25/100
NEW 7100349570	80+	100 × 16	15,300	25/100
NEW 7100349564	80+	115 × 22	13,300	25/100
NEW 7100349571	80+	125 × 22	12,250	25/100
NEW 7100349585	80+	180 × 22	8,500	25/100

3M™ Cubitron™ 3 Fibre Disc 1187C

Product ID	Grade	Diameter (mm)	Max RPM	Unit/Case
7100309798	36+	100 × 16	15,300	25/100
7100309789	36+	115 × 22	13,300	25/100
7100310794	36+	125 × 22	12,250	25/100
7100309795	36+	180 × 22	8,500	25/100
NEW 7100349572	60+	100 × 16	15,300	25/100
NEW 7100349586	60+	115 × 22	13,300	25/100
NEW 7100349581	60+	125 × 22	12,250	25/100
NEW 7100349679	60+	180 × 22	8,500	25/100
NEW 7100349573	80+	100 × 16	15,300	25/100
NEW 7100349587	80+	115 × 22	13,300	25/100
NEW 7100349590	80+	125 × 22	12,250	25/100
NEW 7100349663	80+	180 × 22	8,500	25/100

DISCS TECH TIP:

Keep discs in the closed, resealable foil bag to help maintain disc shape and quality when not in use.



3M™ High Pressure Fibre Disc Back Up Pads (Red) - 36+

Product ID	Diameter (mm)	Part Number	Max RPM	Density Rating
7000032410	125	64861	12,000	Extra Hard
7000032411	180	64862	8,500	Extra Hard



3M™ Fibre Disc Back Up Pads (Black) - 60+ & 80+

Product ID	Diameter (mm)	Part Number	Max RPM	Density Rating
7000008959	100	7312	15,200	Hard
7000105441	115	9583	13,200	Hard
7000105442	125	9584	12,000	Hard
7100016545	180	9921	8,500	Hard

PADS TECH TIP:

If higher performance (faster stock removal) is required when working on flat surfaces with grades: 60+ & 80+, use black ribbed or red ribbed.

Product Ordering Information

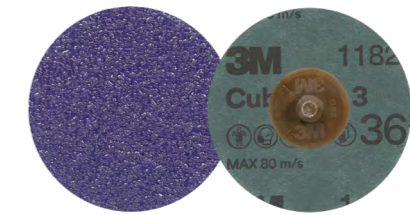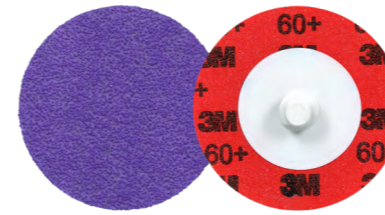


3M™ Cubitron™ 3 Roloc™ Durable Edge Disc 1184F

Product ID	Diameter (mm)	Grade	Box/Case
NEW 7100331727	50	36+	50/200
NEW 7100331410	50	60+	50/200
NEW 7100332404	50	80+	50/200
NEW 7100331731	75	36+	50/200
NEW 7100331725	75	60+	50/200
NEW 7100332405	75	80+	50/200

3M™ Cubitron™ 3 Roloc™ Fibre Disc 1182C

Product ID	Diameter (mm)	Grade	Unit/Case
NEW 7100332086	50	36+	50/200
NEW 7100332343	50	60+	50/200
NEW 7100332356	50	80+	50/200
NEW 7100332346	75	36+	50/200
NEW 7100332232	75	60+	50/200
NEW 7100332357	75	80+	50/200

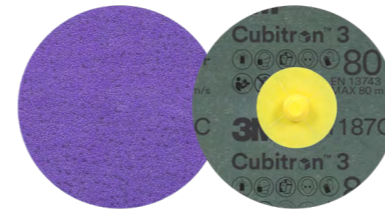

3M™ Cubitron™ 3 Roloc™ Fibre Disc 1187C

Product ID	Diameter (mm)	Grade	Unit/Case
NEW 7100331754	50	36+	50/500
NEW 7100331745	50	60+	50/200
NEW 7100331753	50	80+	50/200
NEW 7100331749	75	36+	50/200
NEW 7100332087	75	60+	50/200
NEW 7100332088	75	80+	50/200

3M™ Roloc™ Shank

Part Number	Shank Size	Thread Size	MOQ
45102	1/4"	1/4-20 EXT	5

Pads for Roloc™ discs

Product ID	Diameter (mm)	Attachment thread	Grade	Hardness
7000045286	38	1/4-20INT	36+ & 60+	Extra Hard or Hard*
7000045284	50	1/4-20INT		
7000045285	70	1/4-20INT		
7000045282	50	1/4-20INT	80+	Medium or Hard*
7000000602	70	1/4-20INT	& 120+	

*Ask for other dimensions availability.



Sustainability matters to 3M Abrasives.

When you buy from the SEAM value chain, you are helping to build a sustainable future for our industry, for people and for the planet.

3M is a founding member of the SEAM abrasives manufacturers program and aligns to the world's highest standards of quality, safety and performance in a sustainable environment.

We commit to transparency, accountability, innovation and progress. When buying from the SEAM value chain, customers are helping to build themselves a sustainable future.



Find out more at
www.seam.earth



Get the discs that get more done at go.3M.com/FibreDiscsNZ



3M New Zealand Ltd
Abrasive Systems Division
94 Apollo Drive, Albany
Auckland, New Zealand

Phone 0800 362 886
Web go.3M.com/NZabrasives

Watch Video



go.3M.com/FibreDiscVideoNZ

Product Selection and Use: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. As a result, customer is solely responsible for evaluating the product and determining whether it is appropriate and suitable for customer's application, including conducting a workplace hazard assessment and reviewing all applicable regulations and standards (e.g., OSHA, ANSI, etc.). Failure to properly evaluate, select, and use a 3M product and appropriate safety products, or to meet all applicable safety regulations, may result in injury, sickness, death, and/or harm to property. **Disclaimer:** 3M industrial and occupational products are intended, labeled, and packaged for sale to trained industrial and occupational customers for workplace use. Unless specifically stated otherwise on the applicable product packaging or literature, these products are not intended, labeled, or packaged for sale to or use by consumers (e.g., for home, personal, primary or secondary school, recreational/sporting, or other uses not described in the applicable product packaging or literature), and must be selected and used in compliance with applicable health and safety regulations and standards (e.g., U.S. OSHA, ANSI), as well as all product literature, user instructions, warnings, and other limitations, and the user must take any action required under any recall, field action or other product use notice. Misuse of 3M industrial and occupational products may result in injury, sickness, death, or property damage. For help with product selection and use, consult your on-site safety professional, industrial hygienist, or other subject matter expert. For additional product information, visit www.3M.com. **Warranty and Limited Remedy:** Unless a different warranty is specifically stated on the applicable 3M product packaging or product literature (in which case such warranty governs), 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. If a 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price. **Limitation of Liability:** Except for the limited remedy stated above, and except to the extent prohibited by law, 3M will not be liable for any loss or damage arising from or related to the 3M product, whether direct, indirect, special, incidental, or consequential (including, but not limited to, lost profits or business opportunity), regardless of the legal or equitable theory asserted, including, but not limited to, warranty, contract, negligence, or strict liability.

3M, Cubitron and Roloc are trademarks of 3M Company. All other trademarks are property of their respective owners. © 3M 2025. All rights reserved.

3M Abrasive Products are for industrial use only.