



3M™ TWIN AXIAL PCI EXPRESS EXTENDER ASSEMBLIES GEN 5.0

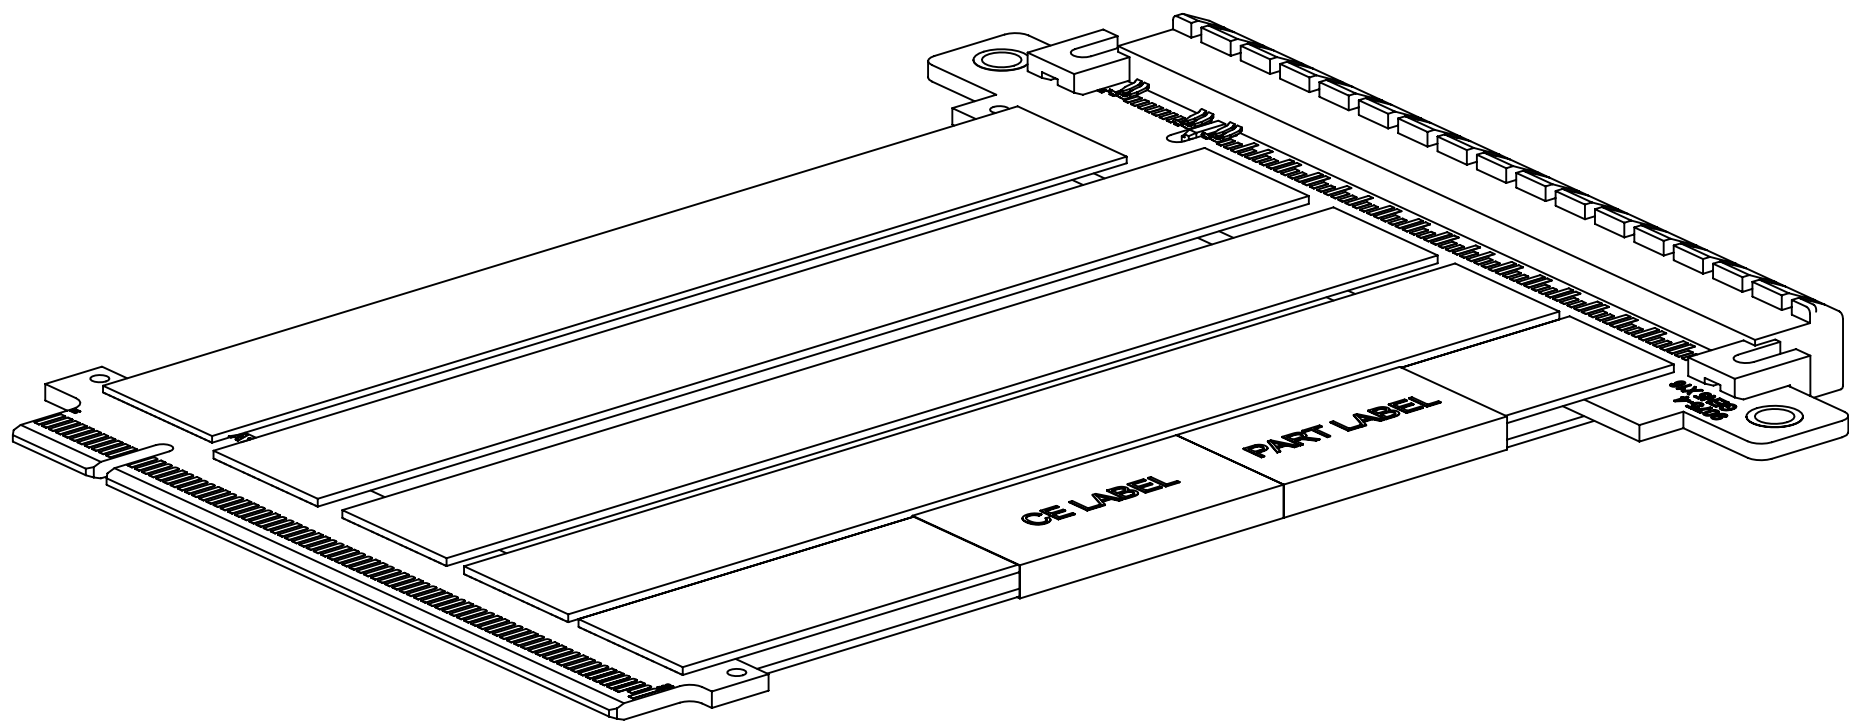

ADHESIVE ENCAPSULANT
APPLIED TO END OF
EACH CABLE ON BOTH
SIDES, 10 PLACES

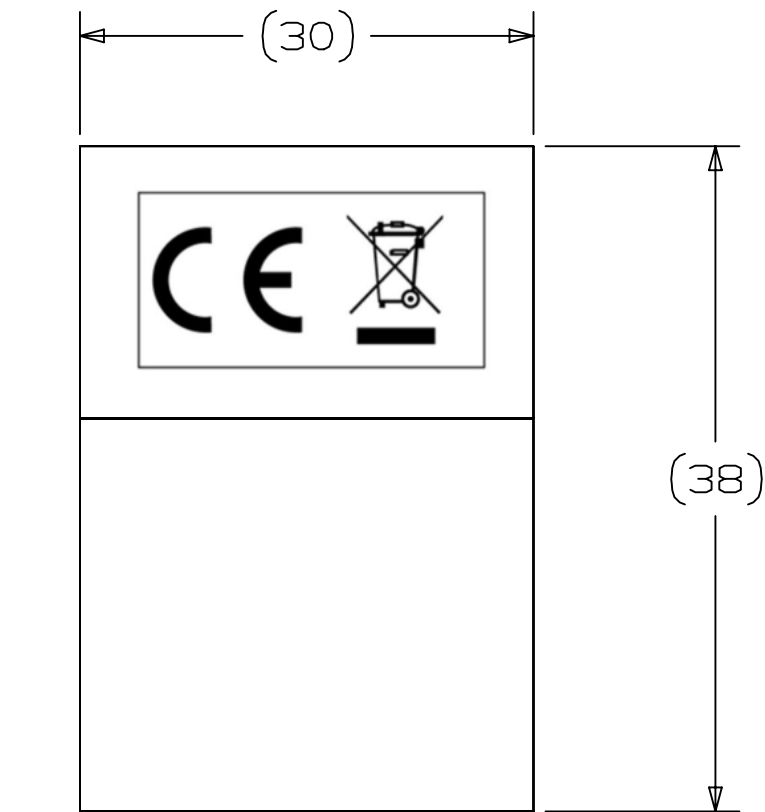

CE WEEE LABEL
(FOR ALL ASSEMBLIES)


×16 STRADDLEMOUNT CEM VERSION
ORDERING INFORMATION
8KDH-0981-XXXX

STANDARD LENGTHS DIM. "A"
0250 = [250 MM]
0500 = [500 MM]

NOTE:
NON-STANDARD LENGTHS AVAILABLE UPON REQUEST.
MAY REQUIRE HIGHER MOQ'S AND LONGER LEAD TIMES.

3M™ Display and Electronics Product Platform, (DEPP)
Transportation and Electronics Business Group (TEBG)
<http://www.3M.com/interconnect>


3M IS A TRADEMARK OF 3M COMPANY.
FOR TECHNICAL, SALES OR ORDERING
INFORMATION CALL 800-225-5373

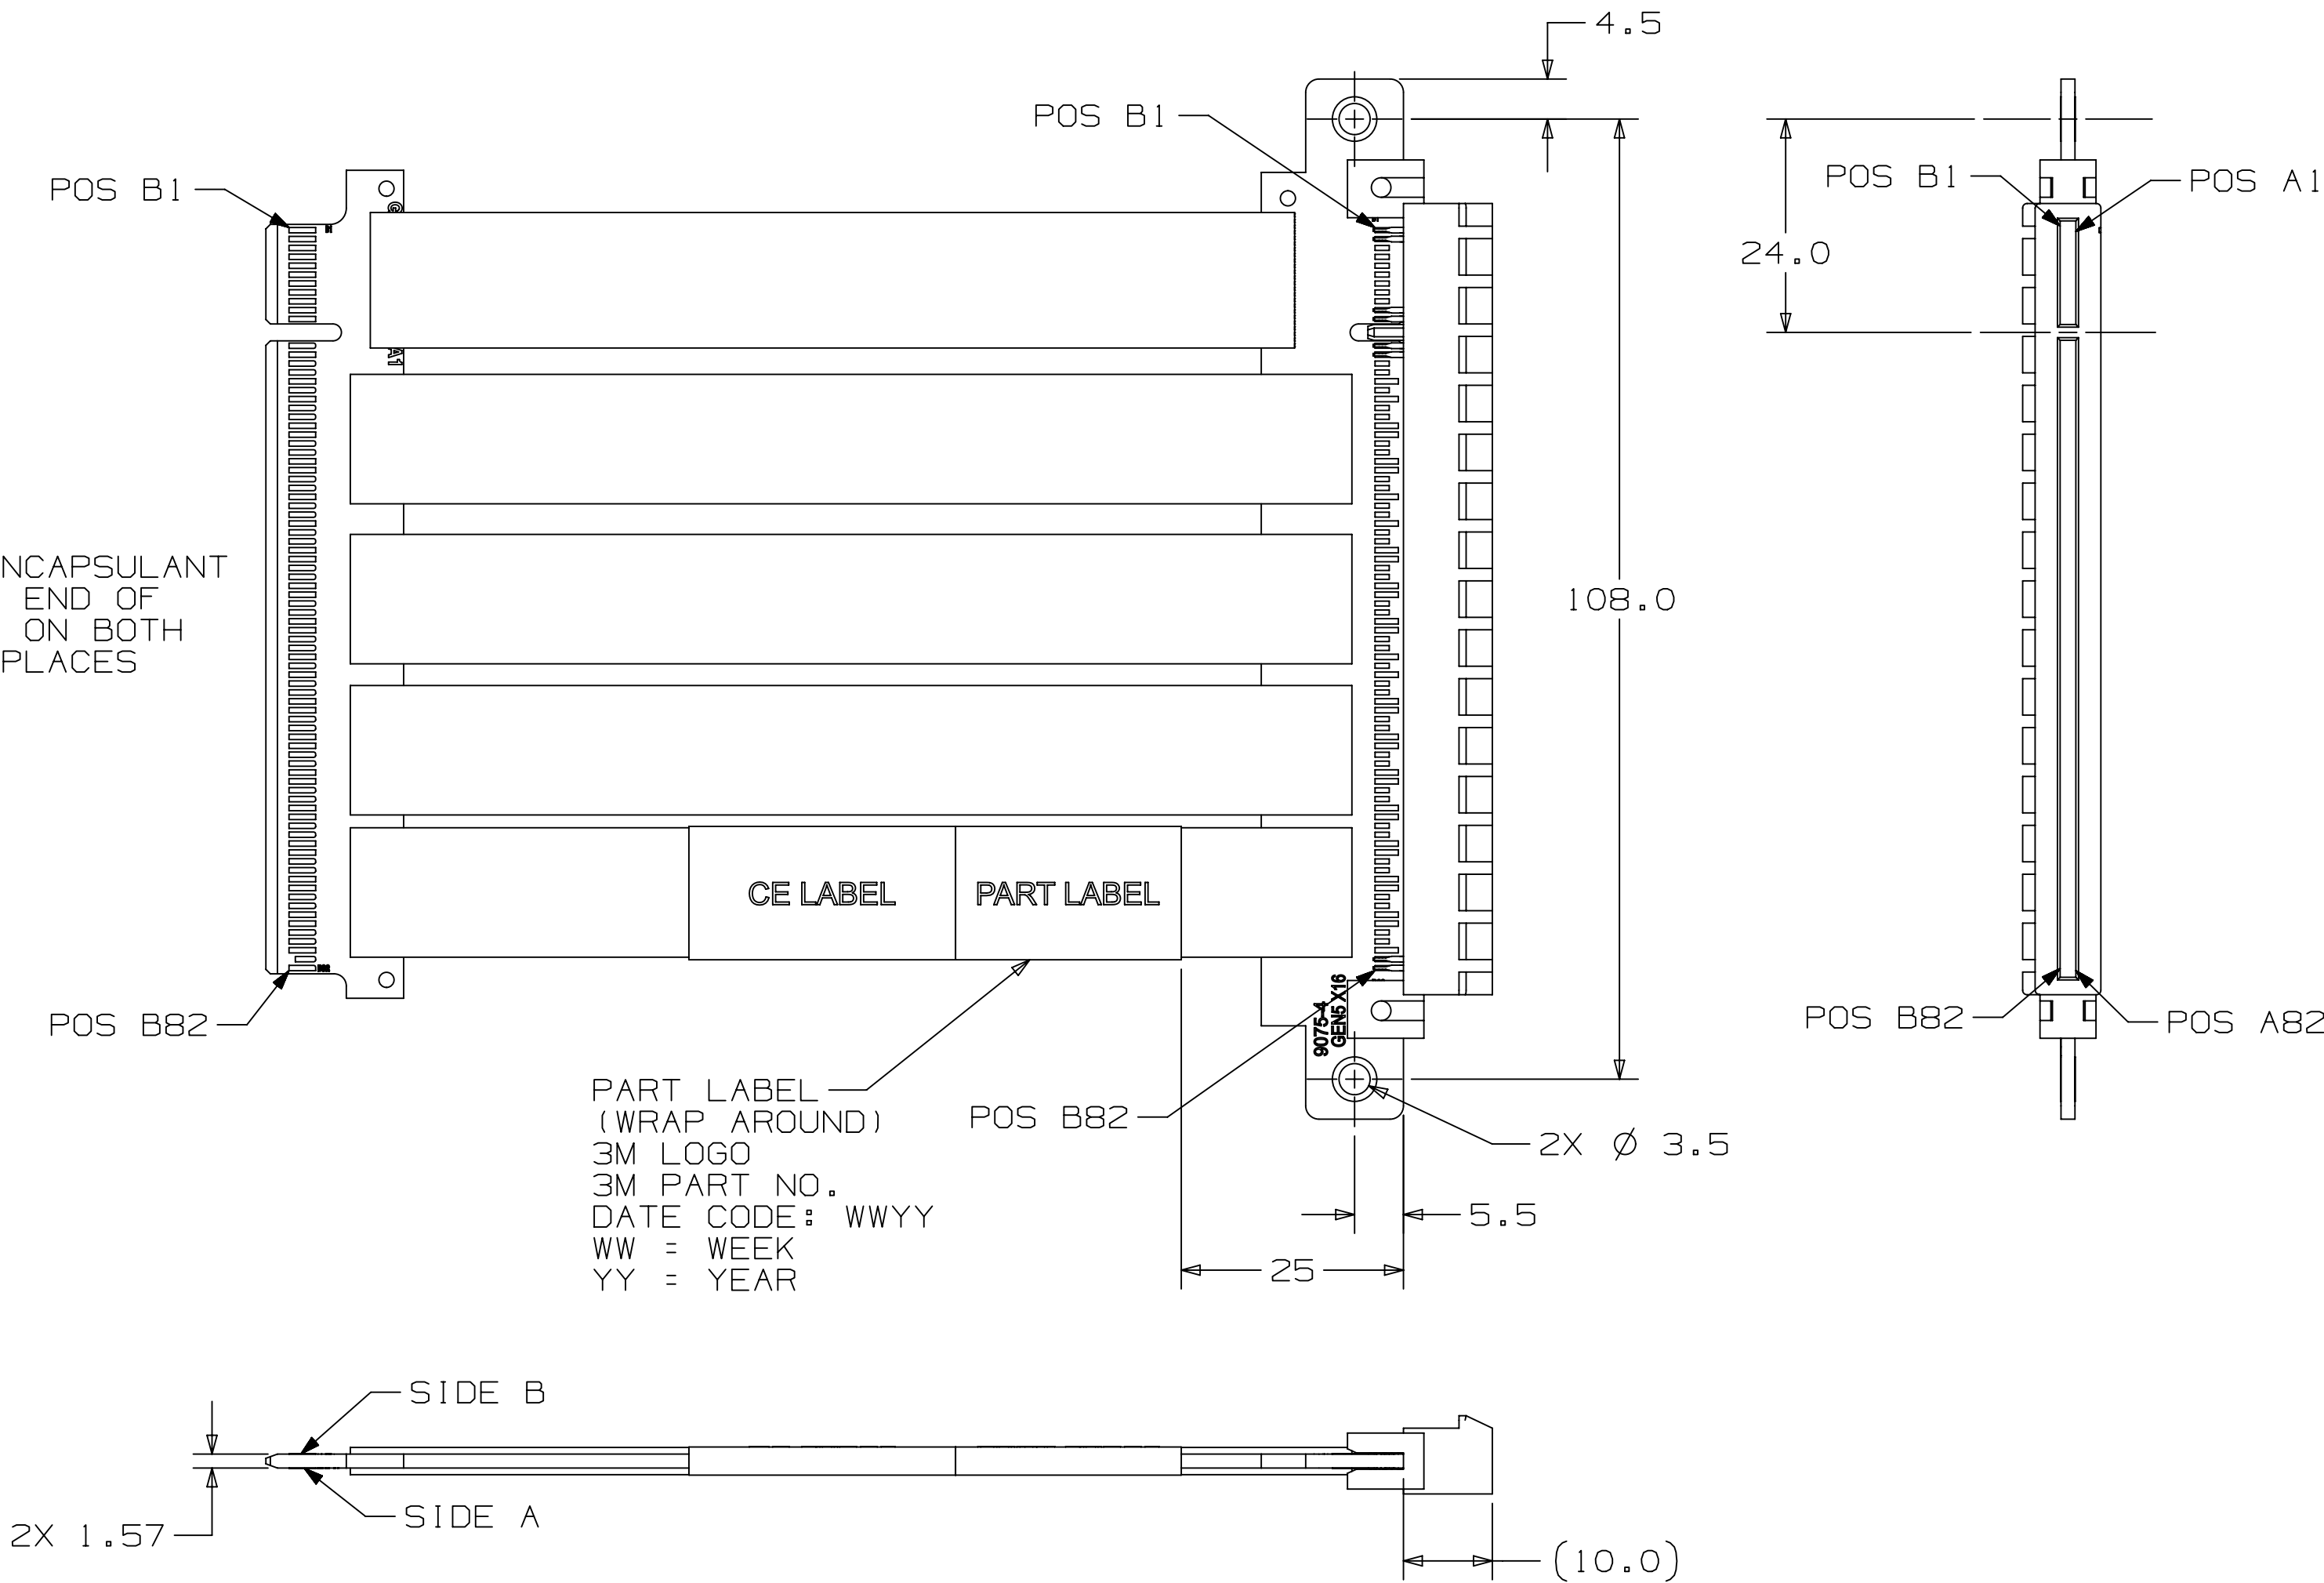



- NOTES
- DIMENSIONS ARE IN MILLIMETERS.
 - 3M TWIN AXIAL CABLE DESCRIPTION:
30 AWG, SILVER PLATED SIGNAL WIRE
IMPEDANCE: 87 ±5 OHM
OVERALL RIBBON WIDTH: 14.6 MM
OVERALL RIBBON THICKNESS: 0.74 MM
 - REGULATORY INFORMATION:
VISIT 3M.com/regs OR CONTACT
YOUR 3M REPRESENTATIVE TO FIND
THE RoHS COMPLIANCE STATUS OF
THE 3M PART YOU ARE INTERESTED
IN.
 - THIS CABLE CONSTRUCTION HAS
A THIN ALUMINUM LAYER AT EACH
EDGE. USER SHOULD EVALUATE
ITS USE IN THEIR APPLICATION
AND, IF NECESSARY, INSULATING
TAPE MAY BE APPLIED TO COVER
THE ALUMINUM LAYER, AS USER
DEEMS APPROPRIATE.
 - PRODUCT SPECIFICATION: PS-0390.
 - FLAMMABILITY RATING
-TWINAX/AUX RIBBONS: UL 758
HORIZONTAL FLAME
TEST FOR INTERNAL WIRING
-PCBS: UL94V-0
 - PADDECARD PLATING:
30μ" MIN. GOLD PLATING
50μ" MIN. NICKEL UNDERPLATING.
 - UNLESS OTHERWISE NOTED,
REFERENCES TO INDUSTRY
SPECIFICATIONS ARE INTENDED
TO INDICATE SUBSTANTIAL
COMPLIANCE TO THE MATERIAL
ELEMENTS OF THE SPECIFICATION.
SUCH REFERENCES SHOULD NOT BE
CONSTRUED AS A GUARANTEE OF
COMPLIANCE TO ALL REQUIREMENTS
IN A GIVEN SPECIFICATION.
 - LENGTH TOLERANCE:
±5MM FOR LENGTHS LESS THAN 0.5M.
±8MM FOR LENGTHS 0.5 TO 1.0 METER.
 - Ⓢ DENOTES CRITICAL DIMENSION.

DESIGN REFERENCE	NEXT ASSEMBLY	REV	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
XXXXXX		DRFT	G. WELLS	DATE JAN 06, 2025	DATE JAN 06, 2025	DATE JAN 06, 2025
		CHKD	M. LETTANG	DATE JAN 06, 2025	DATE JAN 06, 2025	DATE JAN 06, 2025
DIVISION	DIVISION CODE DEPP	3M Center St. Paul, MN 55144				
DO NOT SCALE DRAWING	SCALE	TOLERANCES EXCEPT AS NOTED				
THIRD ANGLE PROJECTION	INTERPRET PER ASME Y14.5 - 2018	INCHES				
MAX. SURFACE ROUGHNESS	ALL SURFACES	MILLIMETERS				
MARKED ONLY	ANGLES	CAGE NUMBER				
		DRAWING NO.				
		REV.				
		MODEL				
		SHT 1 OF 6				

3M™ TWIN AXIAL PCI EXPRESS EXTENDER ASSEMBLIES GEN 5.0

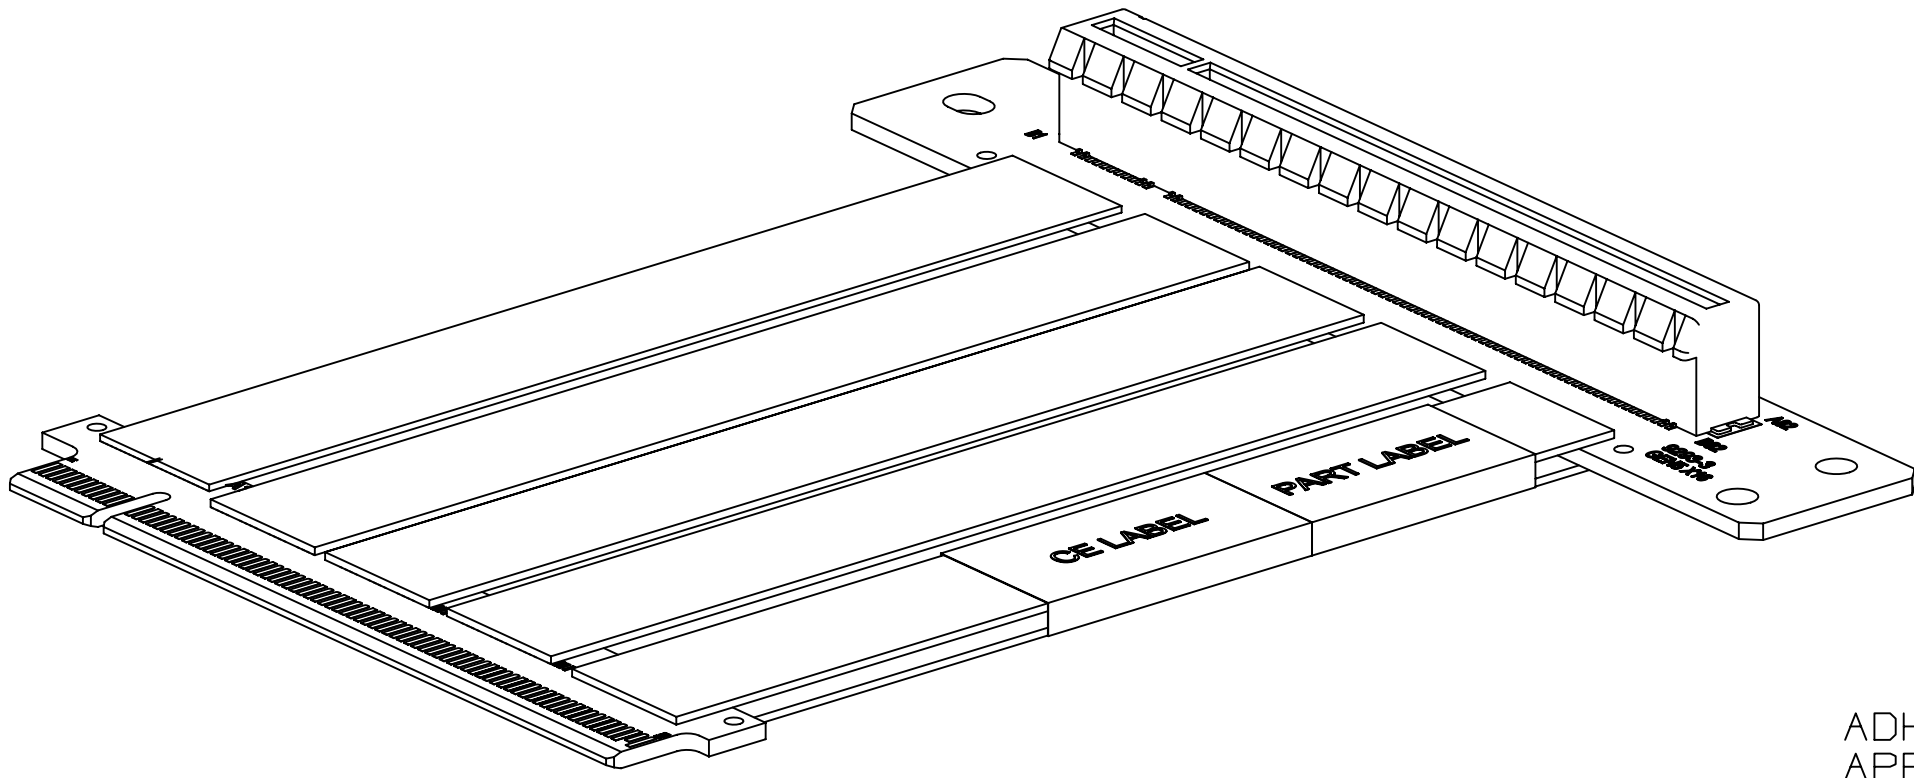

ADHESIVE ENCAPSULANT
APPLIED TO END OF
EACH CABLE ON BOTH
SIDES, 10 PLACES

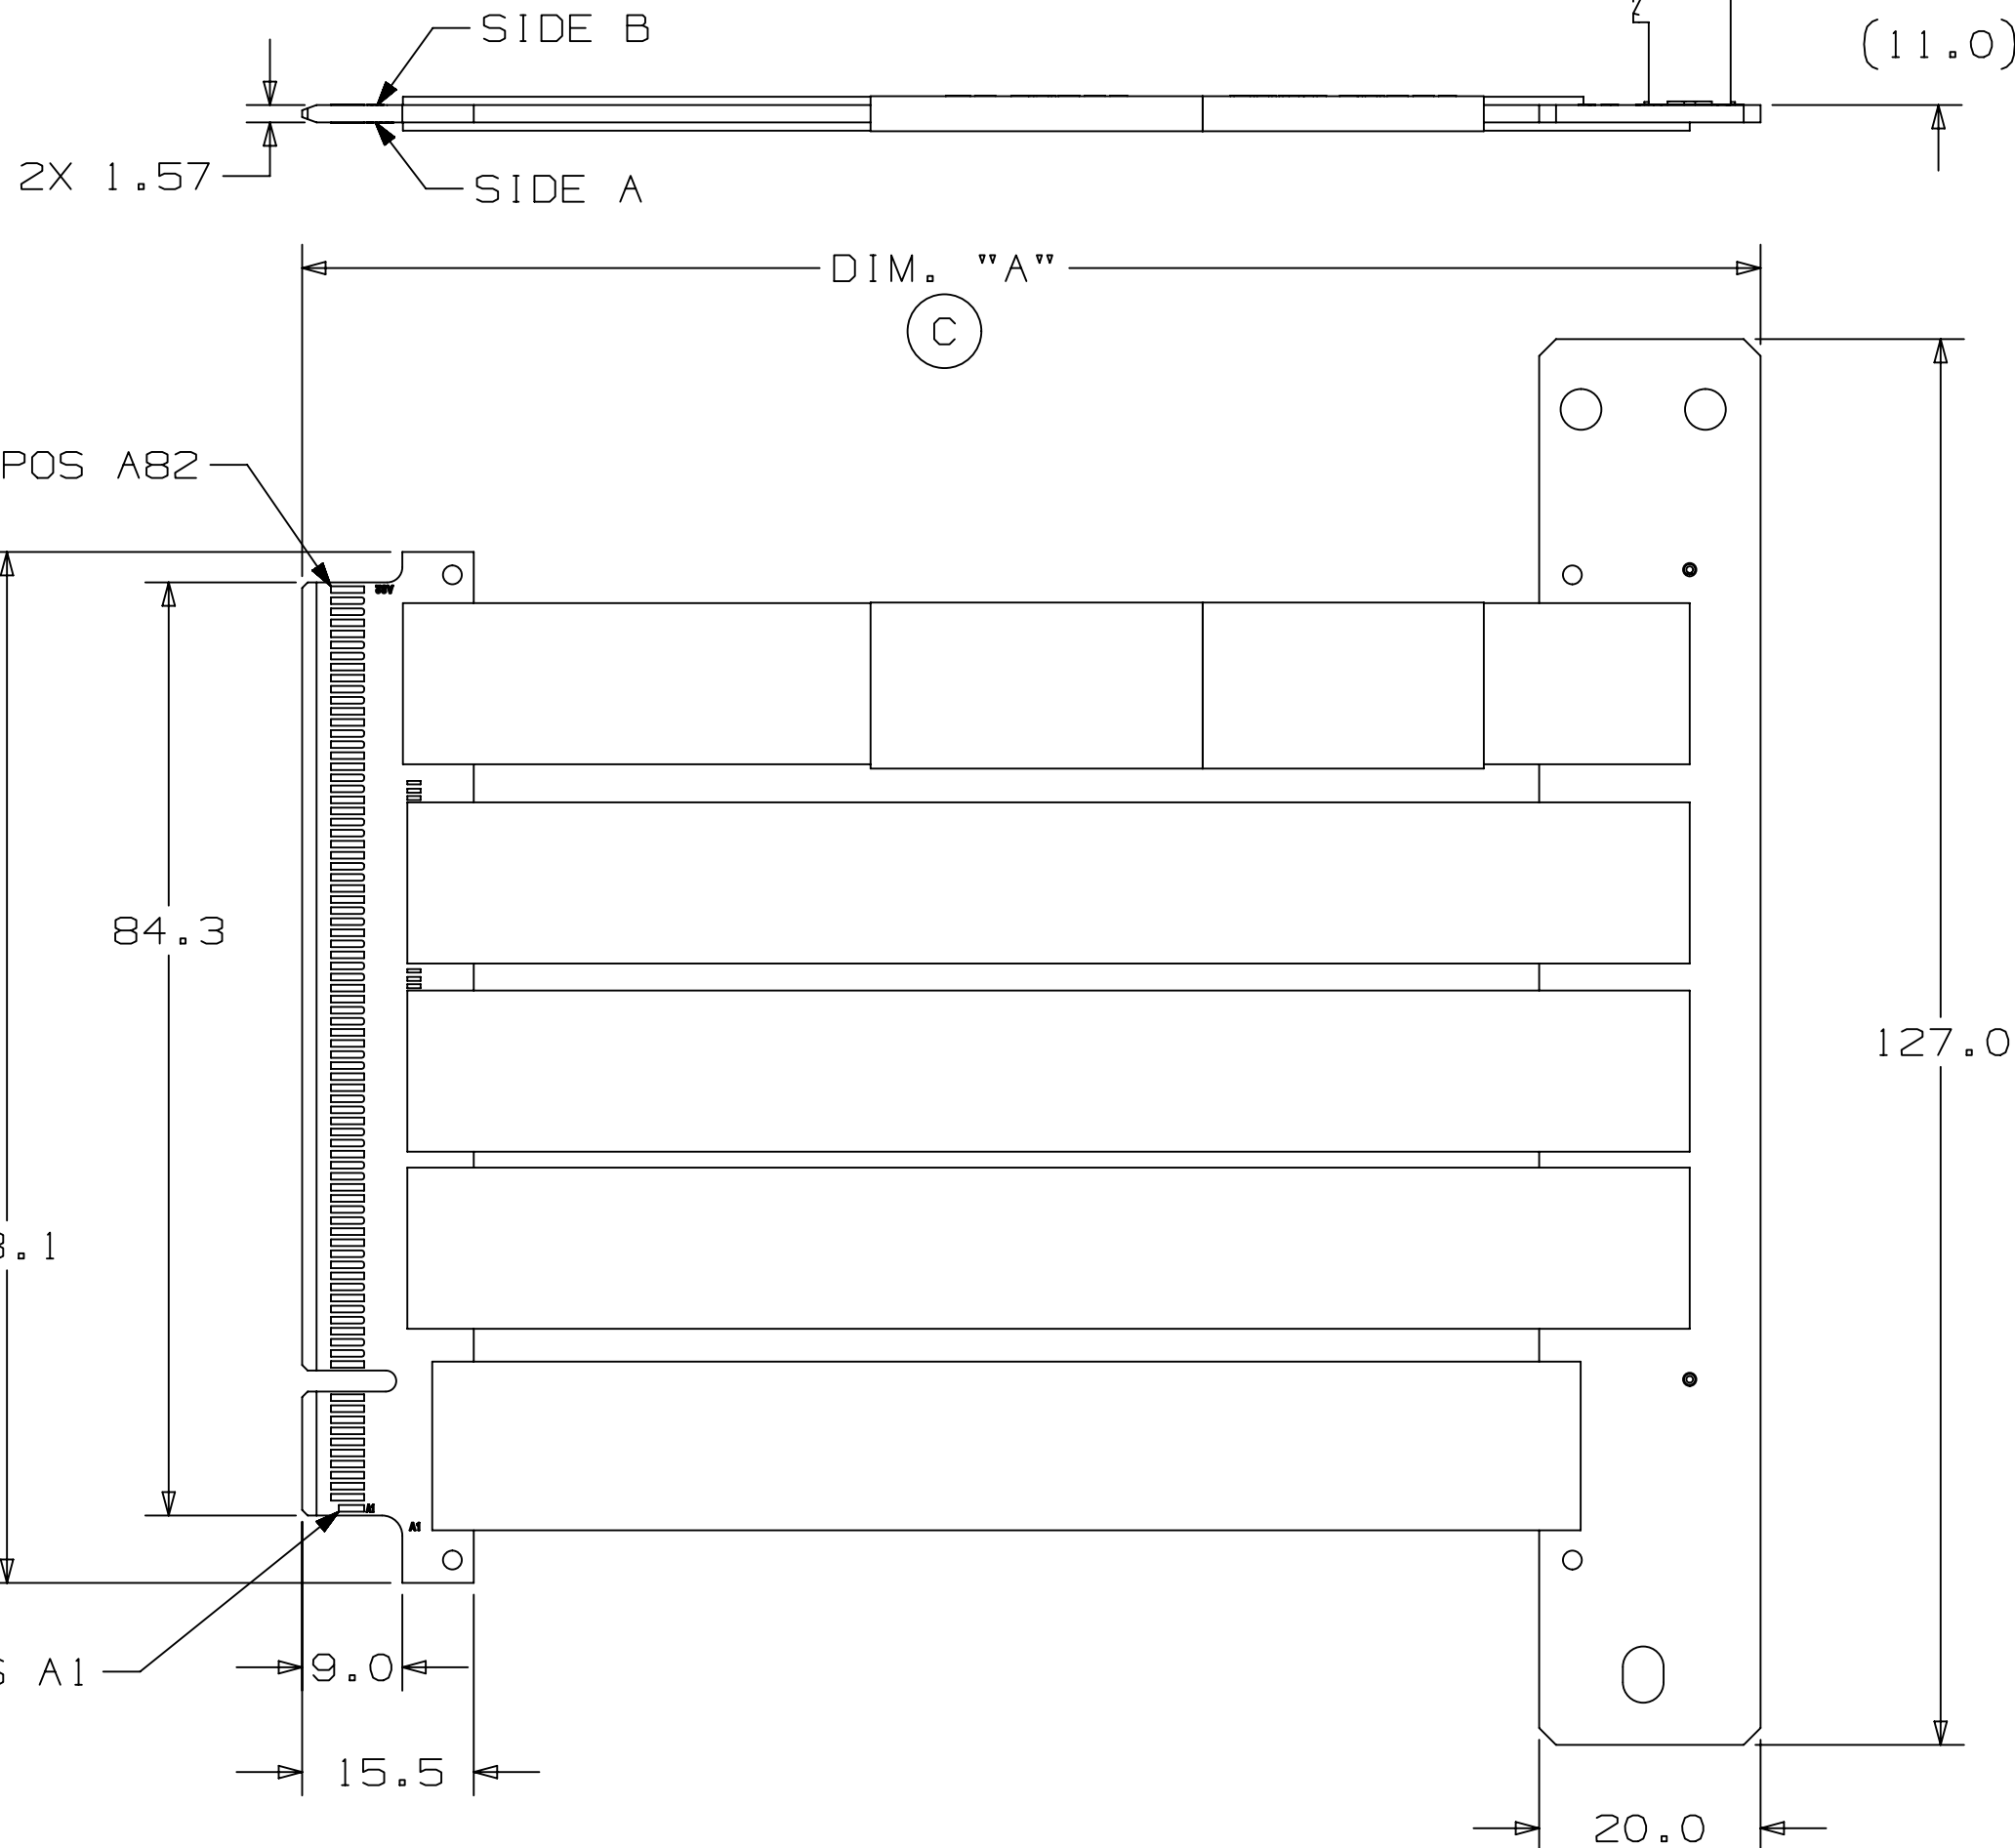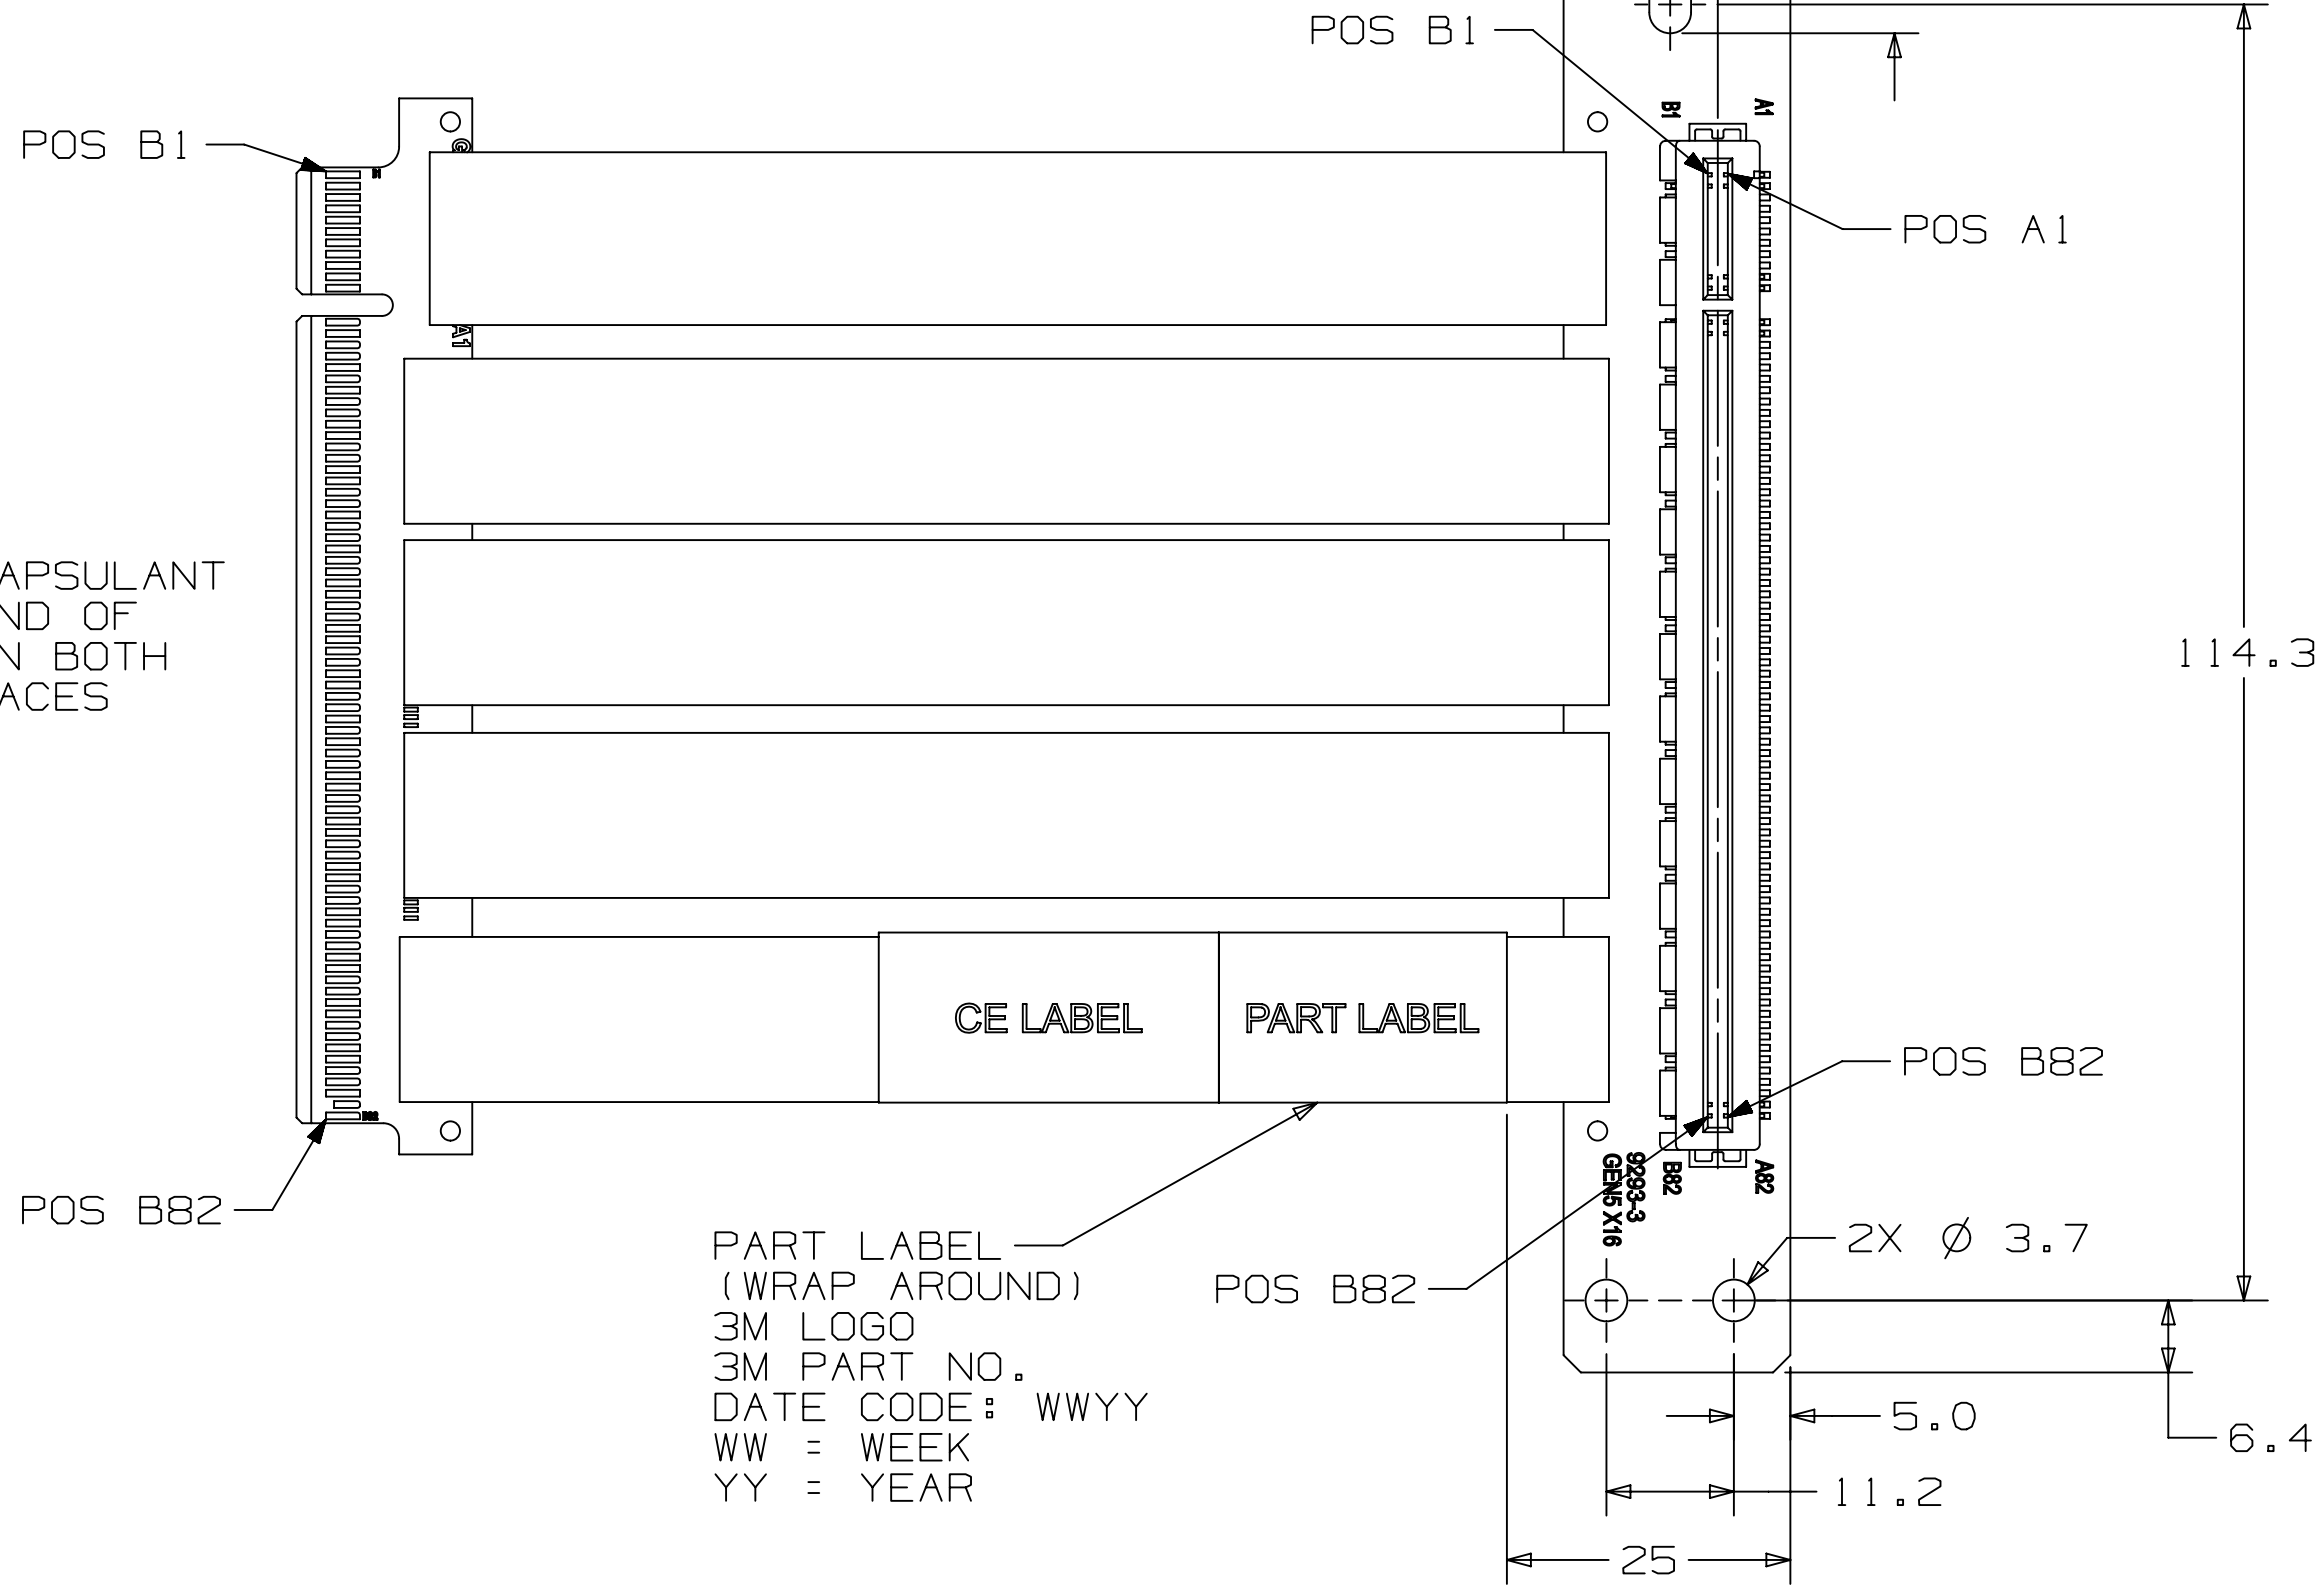



×16 SMT CEM VERSION
ORDERING INFORMATION
8KDJ-0982-XXXX

STANDARD LENGTHS DIM. "A"
0250 = [250 MM]
0500 = [500 MM]


NOTE:
NON-STANDARD LENGTHS AVAILABLE UPON REQUEST.
MAY REQUIRE HIGHER MOQ'S AND LONGER LEAD TIMES.

3M™ Display and Electronics Product Platform, (DEPP)
Transportation and Electronics Business Group (TEBG)
<http://www.3M.com/interconnect>

3M IS A TRADEMARK OF 3M COMPANY.
FOR TECHNICAL, SALES OR ORDERING
INFORMATION CALL 800-225-5373

DESIGN REFERENCE				NEXT ASSEMBLY				REV		ECO		ISSUE DATE AND DESCRIPTION				DRFT		CHKD	
ACCESS CODES								DRFT G T WELLS		DATE JAN 06,2025		MFG J.G. LIU				DATE JAN 06,2025			
								CHKD M. LETTANG		DATE JAN 06,2025		APPRV M. LETTANG				DATE JAN 06,2025			
DIVISION				DIVISION CODE DEPP				 3M Center St. Paul, MN 55144				© 3M COPYRIGHT 2025 This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission or used or disclosed other than for 3M authorized purposes. All rights reserved.							
DO NOT SCALE DRAWING				SCALE												TOLERANCES EXCEPT AS NOTED			
								INCHES				TITLE				3M PCIE EXTENDER CABLE ASSY GEN 5			
THIRD ANGLE PROJECTION								.00 ± .00 ± .00 ± .0000 ±											
INTERPRET PER ASME Y14.5 - 2018								MILLIMETERS											
								0 ± 0 ±.05 0 ±.005				CAGE NUMBER				SIZE DRAWING NO.			
MAX SURFACE ROUGHNESS												D 78-5100-2815-8				REV.			
✓ <input type="checkbox"/> ALL SURFACES																			
<input checked="" type="checkbox"/> MARKED ONLY																			
								ANGLES ±				MODEL				DET. LISTS <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO			
																SHT 2 OF			

3M™ TWIN AXIAL PCI EXPRESS EXTENDER ASSEMBLIES GEN 5.0

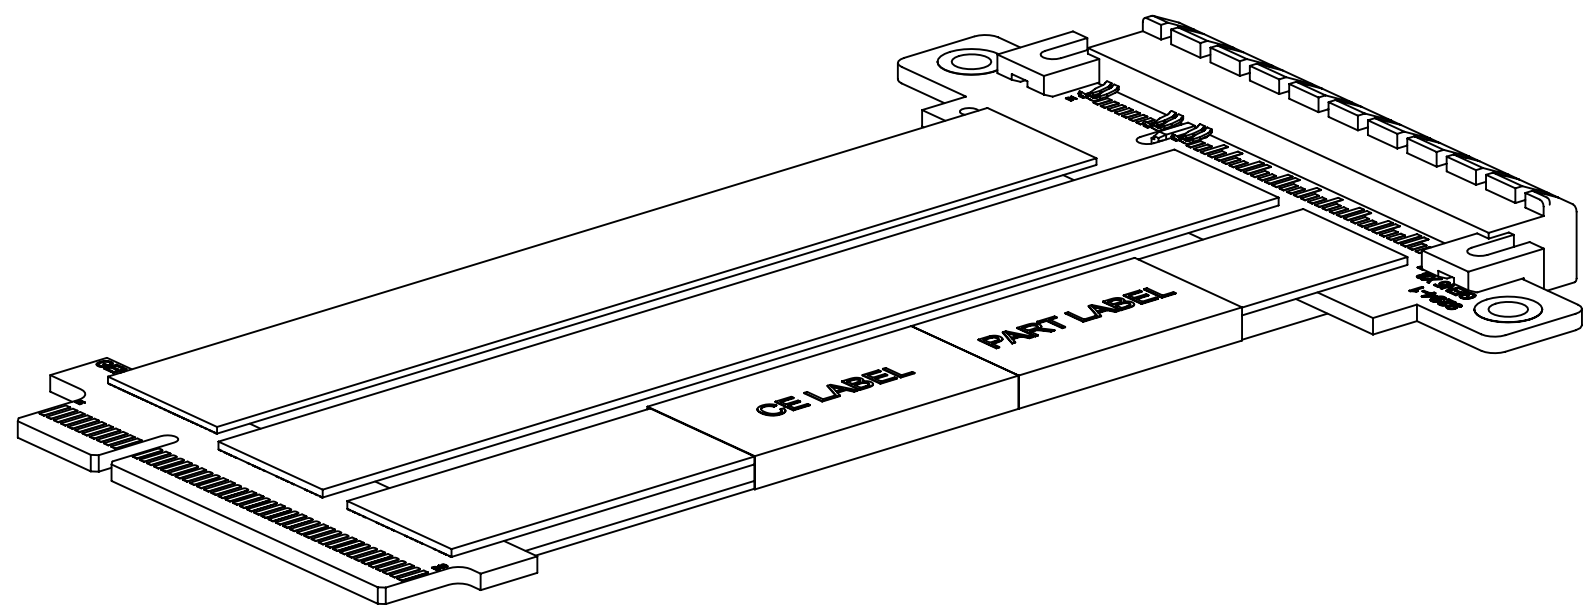

ADHESIVE ENCAPSULANT
APPLIED TO END OF
EACH CABLE ON BOTH
SIDES, 6 PLACES

POS. B1

POS. B49

CE LABEL

PART LABEL

PART LABEL
(WRAP AROUND)
3M LOGO
3M PART NO.
DATE CODE: WWYY
WW = WEEK
YY = YEAR

4.5

75.0

5.5

25

24.0

POS. B1

POS. A1

POS. B49

POS. A49

2X 1.57

SIDE B


SIDE A

10.0

×8 STRADDLEMOUNT CEM VERSION
ORDERING INFORMATION
8KD8-0983-XXXX

STANDARD LENGTHS DIM. "A"
0250 = [250 MM]
0500 = [500 MM]

NOTE:
NON-STANDARD LENGTHS AVAILABLE UPON REQUEST.
MAY REQUIRE HIGHER MOQ'S AND LONGER LEAD TIMES.



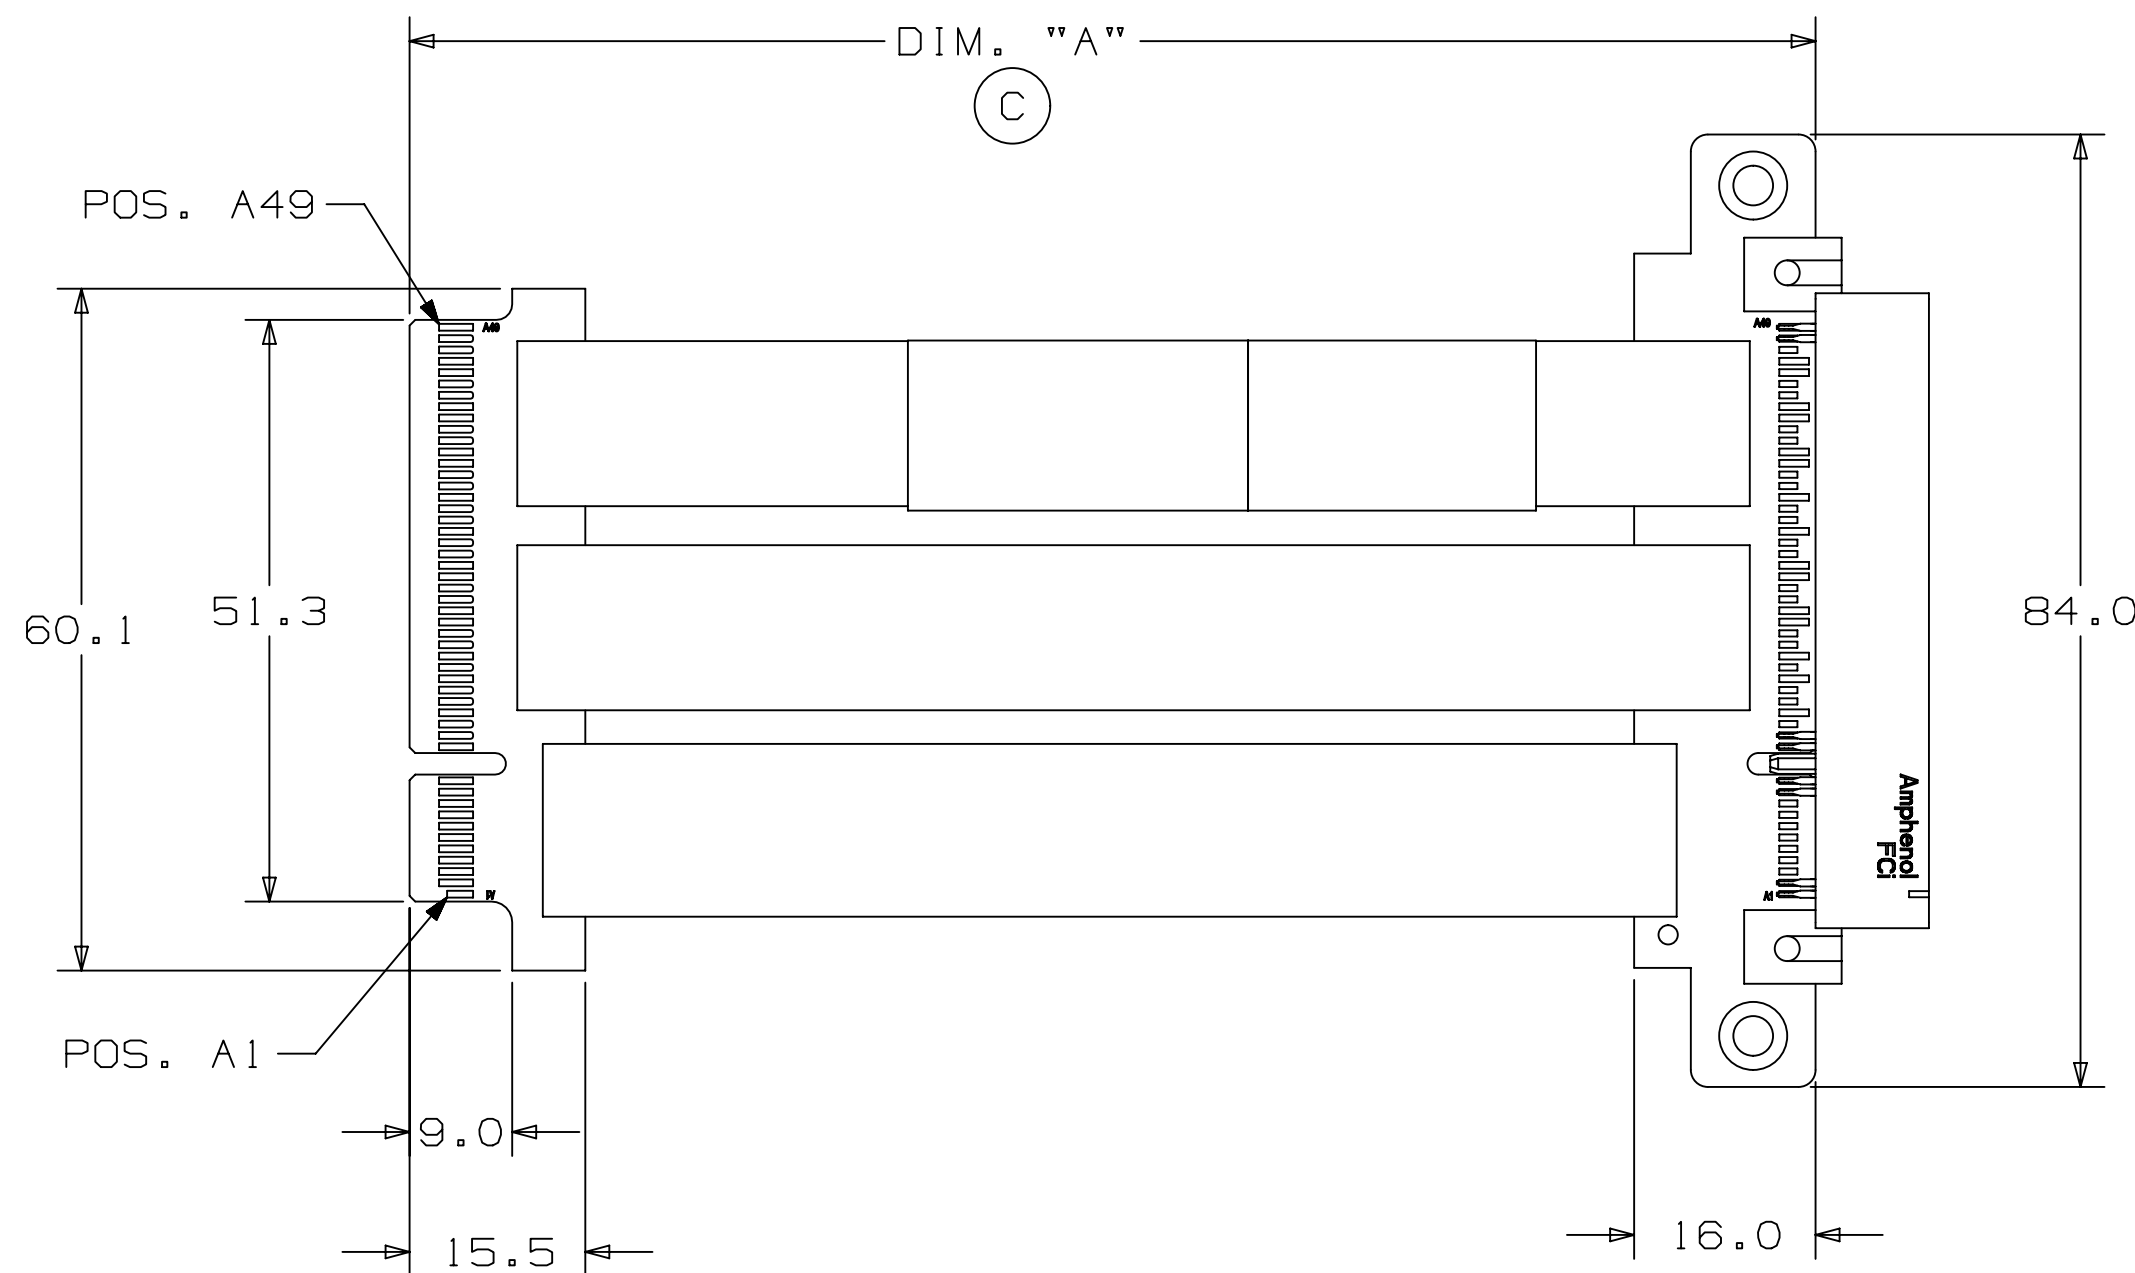


3M™ Display and Electronics Product Platform, (DEPP)
Transportation and Electronics Business Group (TEBG)
<http://www.3M.com/interconnect>

3M IS A TRADEMARK OF 3M COMPANY.
FOR TECHNICAL, SALES OR ORDERING
INFORMATION CALL 800-225-5373

DESIGN REFERENCE		NEXT ASSEMBLY		REV		ECO		ISSUE DATE AND DESCRIPTION		DRFT	CHKD
XREFS		DIVISION		DRFT		DATE		MFG		DATE	
CODES		DEPP		G. WELLS		JAN 06, 2025		J.G. LIU		JAN 06, 2025	
DIVISION		DEPP		CHKD		M. LETTANG		JAN 06, 2025		M. LETTANG	
DO NOT SCALE DRAWING		TOLERANCES EXCEPT AS NOTED		INCHES		0 ± .00		0.00 ± .005		0.000 ± .005	
THIRD ANGLE PROJECTION		MILLIMETERS		0 ± .1		0 ± .5		0.00 ± 0.05		0.000 ± .005	
INTERPRET PER ASME Y14.5 - 2018		MAX. SURFACE ROUGHNESS		ALL SURFACES		MARKED ONLY		ANGLES		±	
TITLE		3M PCIE EXTENDER CABLE ASSY GEN 5		CAGE NUMBER		D78-5100-2815-8		REV.		B	
MODEL		DET		LISTS		YES		NO		SHT 3 OF 6	


3M™ TWIN AXIAL PCI EXPRESS EXTENDER ASSEMBLIES GEN 5.0

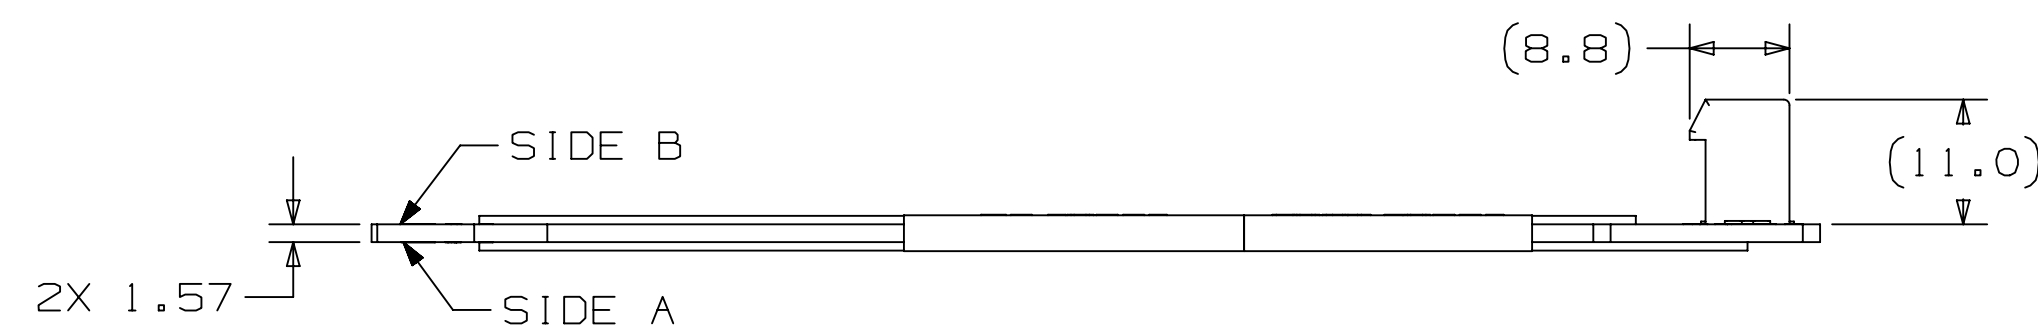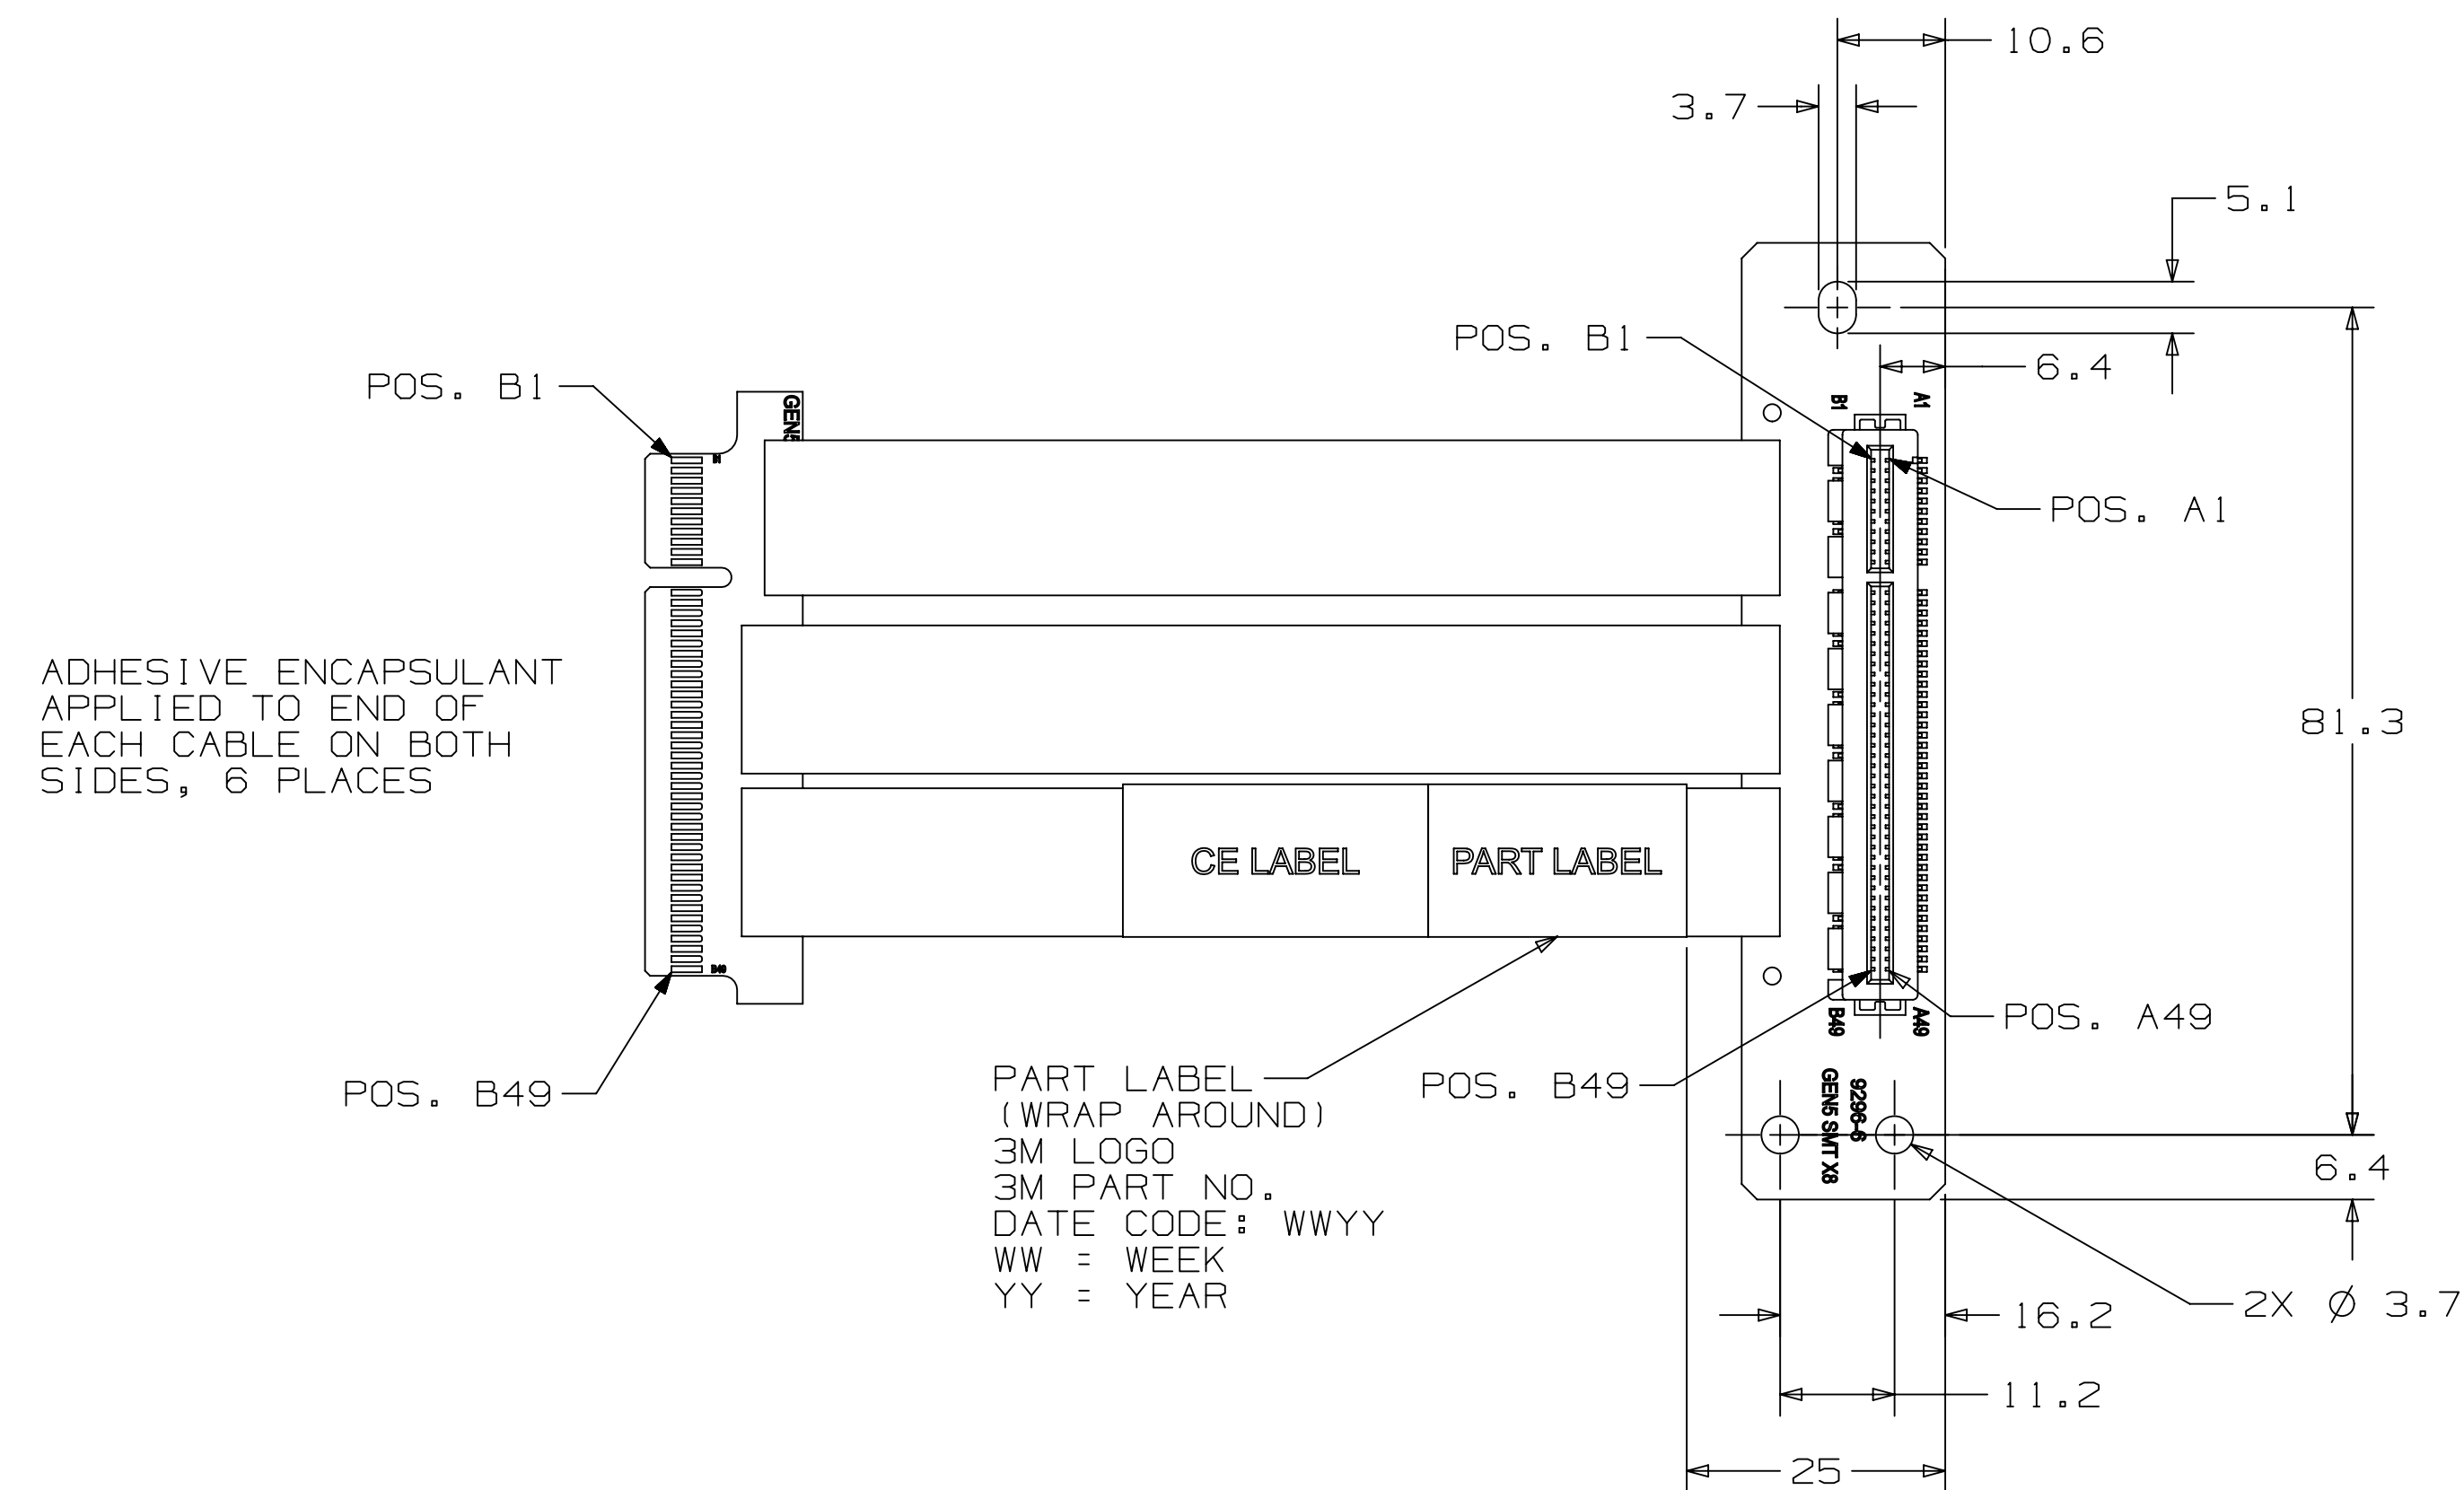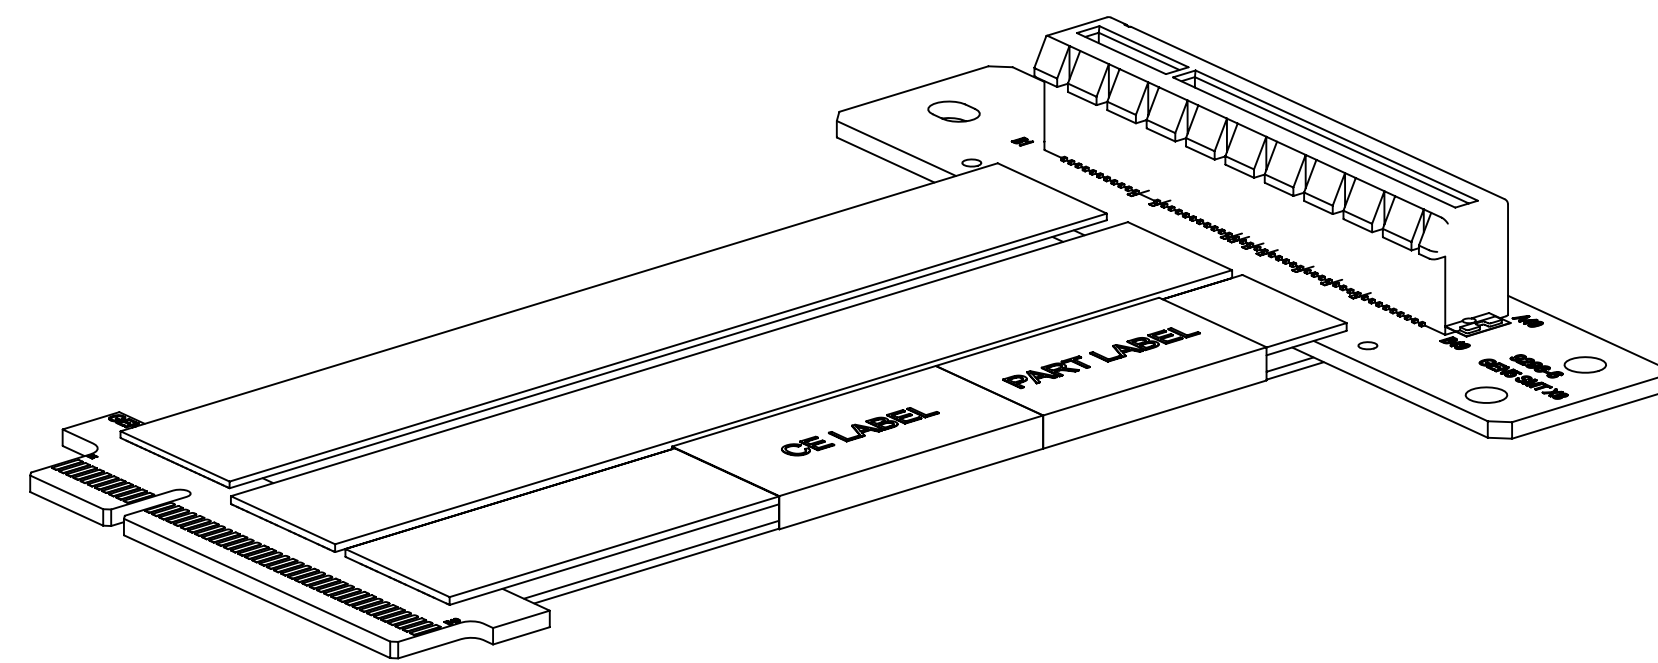

×8 SMT CEM VERSION
ORDERING INFORMATION
8KD9-0984-XXXX









- STANDARD LENGTHS DIM. "A"
0250 = [250 MM]
0500 = [500 MM]

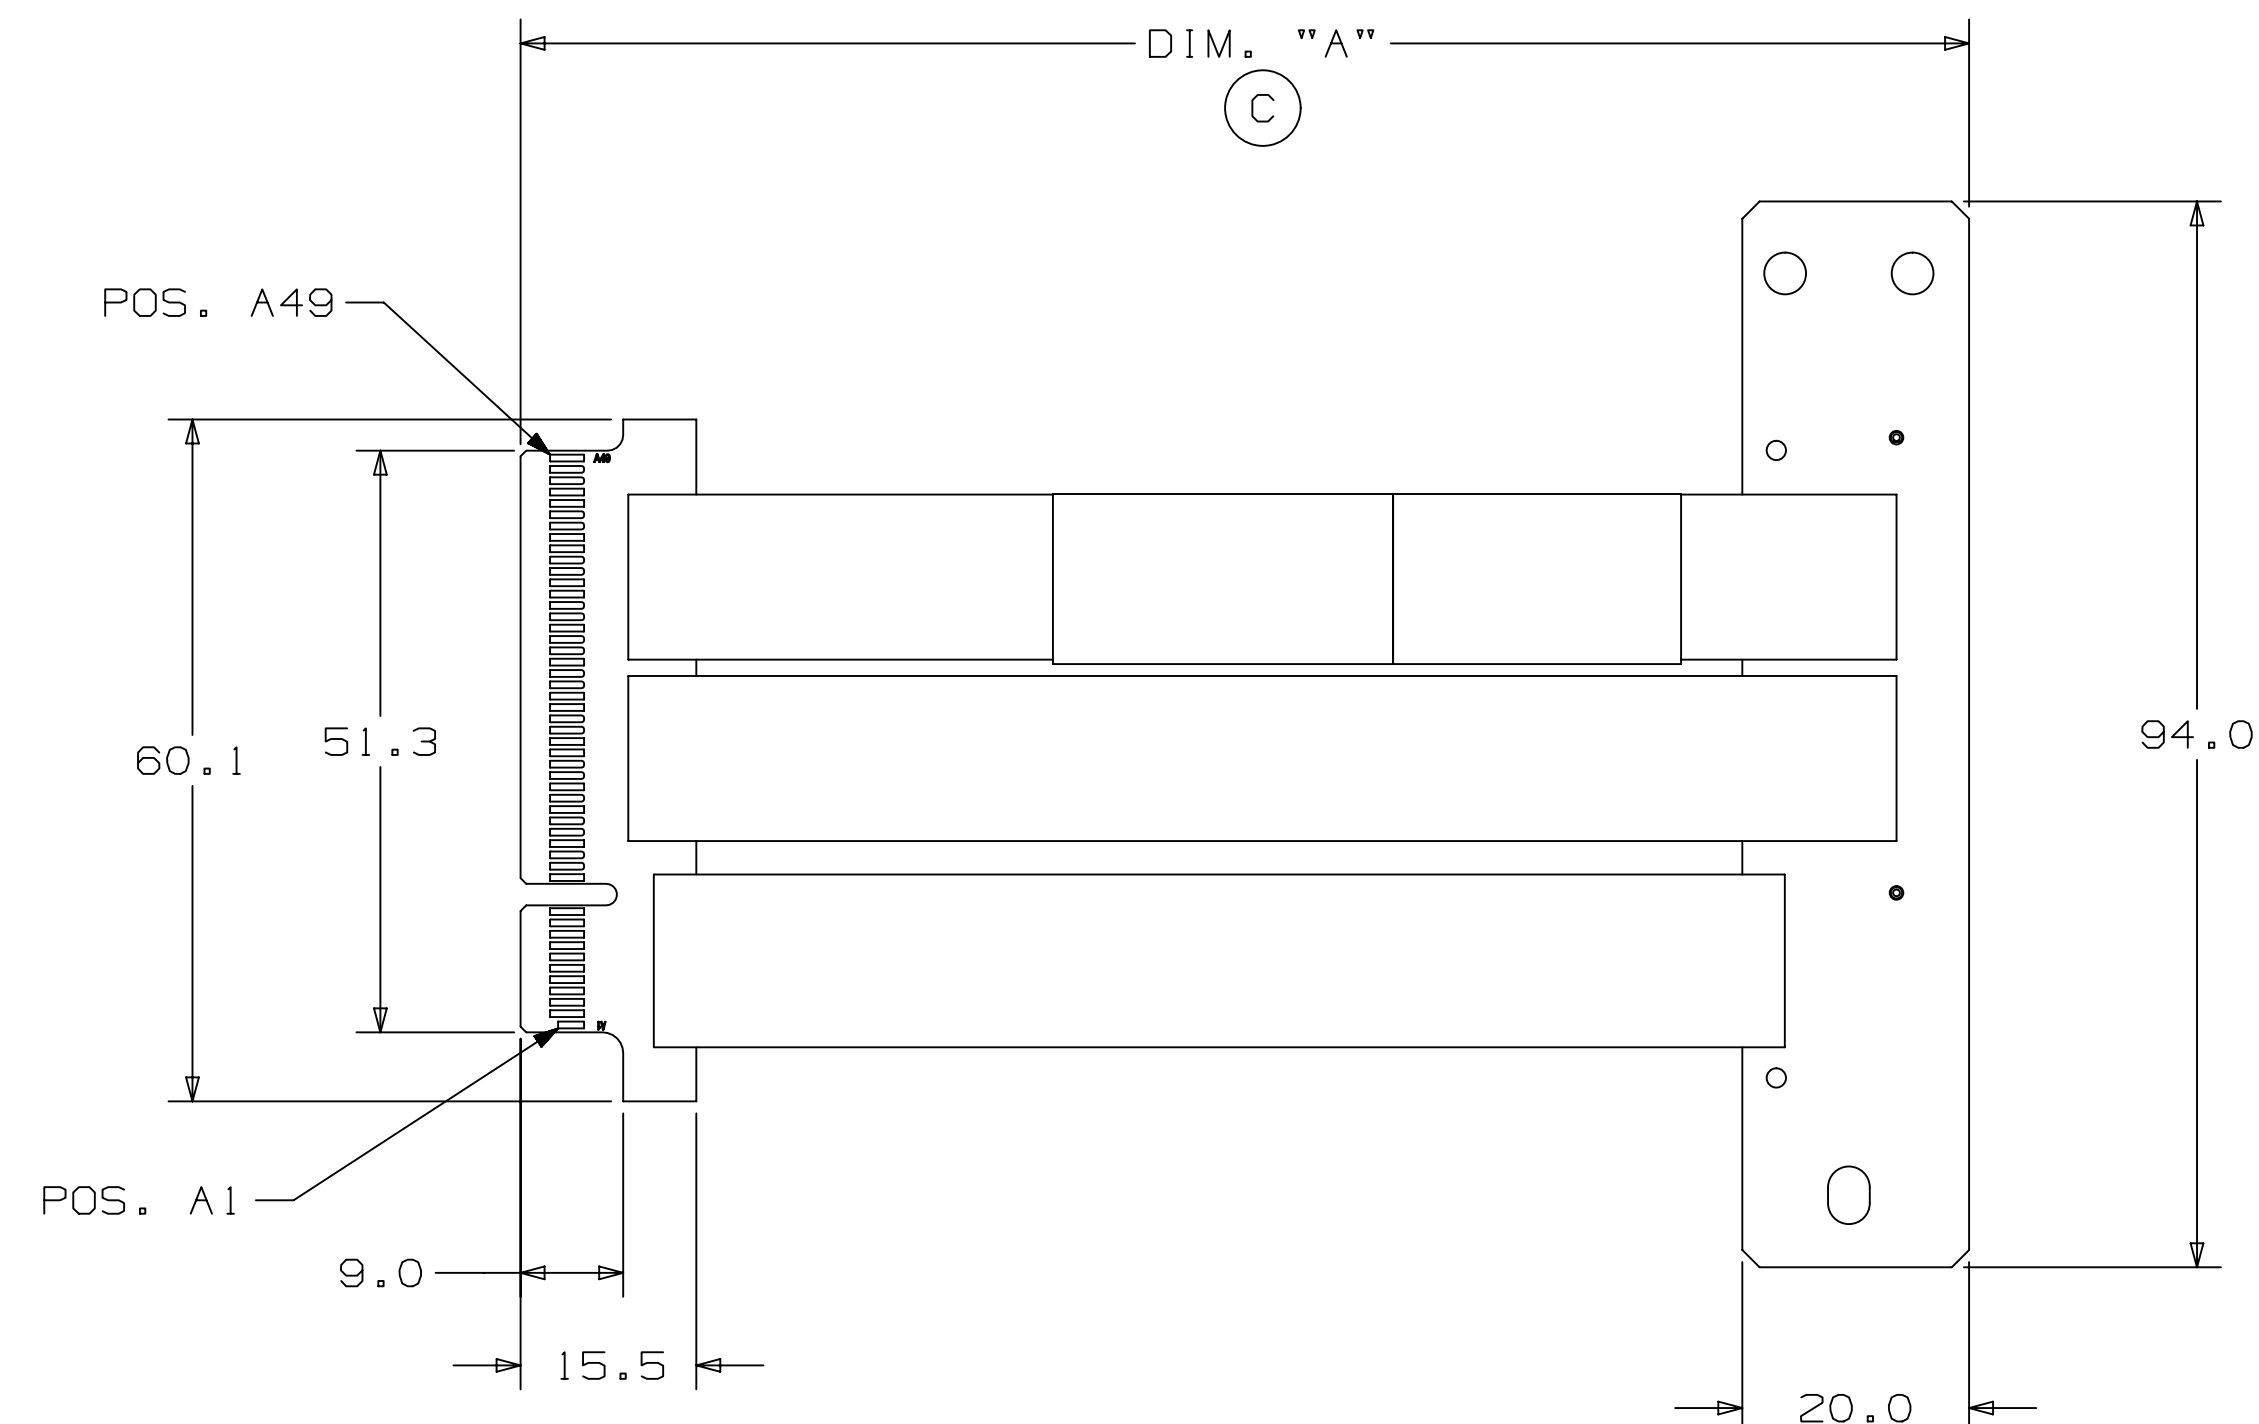NOTE:
NON-STANDARD LENGTHS AVAILABLE UPON REQUEST.
MAY REQUIRE HIGHER MOQ'S AND LONGER LEAD TIMES.



3M™ Display and Electronics Product Platform, (DEPP)
Transportation and Electronics Business Group (TEBG)
<http://www.3M.com/interconnect>

3M IS A TRADEMARK OF 3M COMPANY.
FOR TECHNICAL, SALES OR ORDERING
INFORMATION CALL 800-225-5373

				B	I23692	MAY 27, 2025		JNC	MML
						ADD CE LABEL			
				A	0120684	JAN 06, 2025		GAW	MML
						PRODUCTION RELEASE			
DESIGN REFERENCE	NEXT	ASSEMBLY		REV	ECO	ISSUE DATE AND DESCRIPTION		DRFT	CHKD
ACCESS CODES				DRFT	G. WELLS	DATE	JAN 06, 2025	WFO	J.G. LIU
				CHD	M. LETTANG	DATE	JAN 06, 2025	WFO	M. LETTANG
DIVISION			DIVISION CODE			© 3M COPYRIGHT 2025			
			DEPP			This document and the information it contains are 3M property and the information can be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.			
DO NOT SCALE DRAWING	SCALE	TOLERANCES EXCEPT AS NOTED		TITLE		3M PCIe EXTENDER CABLE ASSY GEN 5			
		INCHES							
		.00 ±							
		.030 ±							
		.0000 ±							
THIRD ANGLE PROJECTION		MILLIMETERS							
		0 ±							
INTERPRET PER ASME Y14.5 - 2018		.00 ±.05							
		.000 ±.005							
MAX. SURFACE ROUGHNESS		ANGLES ±		CAGE NUMBER	SIZE	DRAWING NO.		REV.	
					78-5100-2815-8	B			
				MODEL	DET.	LISTS	YES	YES	NO
							SHT	4	OF 6

3M™ TWIN AXIAL PCI EXPRESS EXTENDER ASSEMBLIES GEN 5.0

X16 PINOUT TABLE

Edgecard pin #	Side B Description	Name	CEM pin #
B01	+12 volt power	+12v	B01
B02	+12 volt power	+12v	B02
B03	+12 volt power	+12v	B03
B04	Ground	GND	B04
B05	SMBus clock	SMCLK	B05
B06	SMBus data	SMDAT	B06
B07	Ground	GND	B07
B08	+3.3 volt power	+3.3v	B08
B09	+TRST#	JTAG1	B09
B10	3.3v auxiliary power	3.3Vaux	B10
B11	Link Reactivation	WAKE#	B11
Mechanical Key			
B12	Clock Request Signal	CLKREQ#	B12
B13	Ground	GND	B13
B14	Transmitter Lane 0, Differential pair	PETp(0) PETn(0)	B14 B15
B16	Ground	GND	B16
B17	Presence detect	PRSNT2#	B17
B18	Ground	GND	B18
B19	Transmitter Lane 1, Differential pair	PETp(1) PETn(1)	B19 B20
B21	Ground	GND	B21
B22	Ground	GND	B22
B23	Transmitter Lane 2, Differential pair	PETp(2) PETn(2)	B23 B24
B25	Ground	GND	B25
B26	Ground	GND	B26
B27	Transmitter Lane 3, Differential pair	PETp(3) PETn(3)	B27 B28
B29	Ground	GND	B29
B30	Emergency Pwr Reduct	PWRBRK#	B30
B31	Presence detect	PRSNT2#	B31
B32	Ground	GND	B32
B33	Transmitter Lane 4, Differential pair	PETp(4) PETn(4)	B33 B34
B35	Ground	GND	B35
B36	Ground	GND	B36
B37	Transmitter Lane 5, Differential pair	PETp(5) PETn(5)	B37 B38
B39	Ground	GND	B39
B40	Ground	GND	B40
B41	Transmitter Lane 6, Differential pair	PETp(6) PETn(6)	B41 B42
B43	Ground	GND	B43
B44	Ground	GND	B44
B45	Transmitter Lane 7, Differential pair	PETp(7) PETn(7)	B45 B46
B47	Ground	GND	B47
B48	Presence detect	PRSNT2#	B48
B49	Ground	GND	B49
B50	Transmitter Lane 8, Differential pair	PETp(8) PETn(8)	B50 B51
B52	Ground	GND	B52
B53	Ground	GND	B53
B54	Transmitter Lane 9, Differential pair	PETp(9) PETn(9)	B54 B55
B56	Ground	GND	B56
B57	Ground	GND	B57
B58	Transmitter Lane 10, Differential pair	PETp(10) PETn(10)	B58 B59
B60	Ground	GND	B60
B61	Ground	GND	B61
B62	Transmitter Lane 11, Differential pair	PETp(11) PETn(11)	B62 B63
B64	Ground	GND	B64
B65	Ground	GND	B65
B66	Transmitter Lane 12, Differential pair	PETp(12) PETn(12)	B66 B67
B68	Ground	GND	B68
B69	Ground	GND	B69
B70	Transmitter Lane 13, Differential pair	PETp(13) PETn(13)	B70 B71
B72	Ground	GND	B72
B73	Ground	GND	B73
B74	Transmitter Lane 14, Differential pair	PETp(14) PETn(14)	B74 B75
B76	Ground	GND	B76
B77	Ground	GND	B77
B78	Transmitter Lane 15, Differential pair	PETp(15) PETn(15)	B78 B79
B80	Ground	GND	B80
B81	Hot plug present detect	PRSNT2#	B81
B82	No Connect	NC	B82

Edgecard pin #	Side A Description	Name	CEM pin #
A01	Presence detect	PRSNT#1	A01
A02	+12 volt power	+12v	A02
A03	+12 volt power	+12v	A03
A04	Ground	GND	A04
A05	TCK	JTAG2	A05
A06	TDI	JTAG3	A06
A07	TDO	JTAG4	A07
A08	TMS	JTAG5	A08
A09	+3.3 volt power	+3.3v	A09
A10	+3.3 volt power	+3.3v	A10
A11	Fundamental reset	PERST#	A11
Mechanical Key			
A12	Ground	GND	A12
A13	Reference Clock, Differential pair	REFCLK+ REFCLK-	A13 A14
A15	Ground	GND	A15
A16	Receiver Lane 0, Differential pair	PERp(0) PERn(0)	A16 A17
A18	Ground	GND	A18
A19	Manufacturer Test Mode	MFG	A19
A20	Ground	GND	A20
A21	Receiver Lane 1, Differential pair	PERp(1) PERn(1)	A21 A22
A23	Ground	GND	A23
A24	Ground	GND	A24
A25	Receiver Lane 2, Differential pair	PERp(2) PERn(2)	A25 A26
A27	Ground	GND	A27
A28	Ground	GND	A28
A29	Receiver Lane 3, Differential pair	PERp(3) PERn(3)	A29 A30
A31	Ground	GND	A31
A32	No Connect	NC	A32
A33	No Connect	NC	A33
A34	Ground	GND	A34
A35	Receiver Lane 4, Differential pair	PERp(4) PERn(4)	A35 A36
A37	Ground	GND	A37
A38	Ground	GND	A38
A39	Receiver Lane 5, Differential pair	PERp(5) PERn(5)	A39 A40
A41	Ground	GND	A41
A42	Ground	GND	A42
A43	Receiver Lane 6, Differential pair	PERp(6) PERn(6)	A43 A44
A45	Ground	GND	A45
A46	Ground	GND	A46
A47	Receiver Lane 7, Differential pair	PERp(7) PERn(7)	A47 A48
A49	Ground	GND	A49
A50	No Connect	NC	A50
A51	Ground	GND	A51
A52	Receiver Lane 8, Differential pair	PERp(8) PERn(8)	A52 A53
A54	Ground	GND	A54
A55	Ground	GND	A55
A56	Receiver Lane 9, Differential pair	PERp(9) PERn(9)	A56 A57
A58	Ground	GND	A58
A59	Ground	GND	A59
A60	Receiver Lane 10, Differential pair	PERp(10) PERn(10)	A60 A61
A62	Ground	GND	A62
A63	Ground	GND	A63
A64	Receiver Lane 11, Differential pair	PERp(11) PERn(11)	A64 A65
A66	Ground	GND	A66
A67	Ground	GND	A67
A68	Receiver Lane 12, Differential pair	PERp(12) PERn(12)	A68 A69
A70	Ground	GND	A70
A71	Ground	GND	A71
A72	Receiver Lane 13, Differential pair	PERp(13) PERn(13)	A72 A73
A74	Ground	GND	A74
A75	Ground	GND	A75
A76	Receiver Lane 14, Differential pair	PERp(14) PERn(14)	A76 A77
A78	Ground	GND	A78
A79	Ground	GND	A79
A80	Receiver Lane 15, Differential pair	PERp(15) PERn(15)	A80 A81
A82	Ground	GND	A82

X8 PINOUT TABLE

Edgecard pin #	Side B Description	Name	CEM pin #
B01	+12 volt power	+12v	B01
B02	+12 volt power	+12v	B02
B03	+12 volt power	+12v	B03
B04	Ground	GND	B04
B05	SMBus clock	SMCLK	B05
B06	SMBus data	SMDAT	B06
B07	Ground	GND	B07
B08	+3.3 volt power	+3.3v	B08
B09	+TRST#	JTAG1	B09
B10	3.3v auxiliary power	3.3Vaux	B10
B11	Link Reactivation	WAKE#	B11
Mechanical Key			
B12	Clock Request Signal	CLKREQ#	B12
B13	Ground	GND	B13
B14	Transmitter Lane 0, Differential pair	PETp(0) PETn(0)	B14 B15
B16	Ground	GND	B16
B17	Presence detect	PRSNT2#	B17
B18	Ground	GND	B18
B19	Transmitter Lane 1, Differential pair	PETp(1) PETn(1)	B19 B20
B21	Ground	GND	B21
B22	Ground	GND	B22
B23	Transmitter Lane 2, Differential pair	PETp(2) PETn(2)	B23 B24
B25	Ground	GND	B25
B26	Ground	GND	B26
B27	Transmitter Lane 3, Differential pair	PETp(3) PETn(3)	B27 B28
B29	Ground	GND	B29
B30	Emergency Pwr Reduct	PWRBRK#	B30
B31	Presence detect	PRSNT2#	B31
B32	Ground	GND	B32
B33	Transmitter Lane 4, Differential pair	PETp(4) PETn(4)	B33 B34
B35	Ground	GND	B35
B36	Ground	GND	B36
B37	Transmitter Lane 5, Differential pair	PETp(5) PETn(5)	B37 B38
B39	Ground	GND	B39
B40	Ground	GND	B40
B41	Transmitter Lane 6, Differential pair	PETp(6) PETn(6)	B41 B42
B43	Ground	GND	B43
B44	Ground	GND	B44
B45	Transmitter Lane 7, Differential pair	PETp(7) PETn(7)	B45 B46
B47	Ground	GND	B47
B48	Presence detect	PRSNT2#	B48
B49	Ground	GND	B49

Edgecard pin #	Side A Description	Name	CEM pin #
A01	Presence detect	PRSNT#1	A01
A02	+12 volt power	+12v	A02
A03	+12 volt power	+12v	A03
A04	Ground	GND	A04
A05	TCK	JTAG2	A05
A06	TDI	JTAG3	A06
A07	TDO	JTAG4	A07
A08	TMS	JTAG5	A08
A09	+3.3 volt power	+3.3v	A09
A10	+3.3 volt power	+3.3v	A10
A11	Fundamental reset	PERST#	A11
Mechanical Key			
A12	Ground	GND	A12
A13	Reference Clock, Differential pair	REFCLK+ REFCLK-	A13 A14
A15	Ground	GND	A15
A16	Receiver Lane 0, Differential pair	PERp(0) PERn(0)	A16 A17
A18	Ground	GND	A18
A19	Manufacturer Test Mode	MFG	A19
A20	Ground	GND	A20
A21	Receiver Lane 1, Differential pair	PERp(1) PERn(1)	A21 A22
A23	Ground	GND	A23
A24	Ground	GND	A24
A25	Receiver Lane 2, Differential pair	PERp(2) PERn(2)	A25 A26
A27	Ground	GND	A27
A28	Ground	GND	A28
A29	Receiver Lane 3, Differential pair	PERp(3) PERn(3)	A29 A30
A31	Ground	GND	A31
A32	No Connect	NC	A32
A33	No Connect	NC	A33
A34	Ground	GND	A34
A35	Receiver Lane 4, Differential pair	PERp(4) PERn(4)	A35 A36
A37	Ground	GND	A37
A38	Ground	GND	A38
A39	Receiver Lane 5, Differential pair	PERp(5) PERn(5)	A39 A40
A41	Ground	GND	A41
A42	Ground	GND	A42
A43	Receiver Lane 6, Differential pair	PERp(6) PERn(6)	A43 A44
A45	Ground	GND	A45
A46	Ground	GND	A46
A47	Receiver Lane 7, Differential pair	PERp(7) PERn(7)	A47 A48
A49	Ground	GND	A49

ALL GROUNDS ARE TIED TOGETHER IN PCBs

3M™ Display and Electronics Product Platform, (DEPP)
Transportation and Electronics Business Group (TEBG)
http://www.3M.com/interconnect

3M IS A TRADEMARK OF 3M COMPANY.
FOR TECHNICAL, SALES OR ORDERING
INFORMATION CALL 800-225-5373

ALL GROUNDS ARE TIED TOGETHER IN PCBs

DESIGN REFERENCE		NEXT ASSEMBLY	
ACBSP	CODES		
DIVISION		DIVISION CODE	
DO NOT SCALE DRAWING		DEPP	
THIRD ANGLE PROJECTION		TOLERANCES EXCEPT AS NOTED	
INTERPRET PER ASME Y14.5 - 2018		INCHES	
MAX. SURFACE ROUGHNESS		MILLIMETERS	
D TALL SURFACES		0 ± 1	
MARKED ONLY		0 ± .5	
		0.00 ± 0.05	
		0.00 ± .005	
		ANGLES	
B	123692	MAY 27, 2025	
A	0120684	ADD CE LABEL	
REV		ECO	ISSUE DATE AND DESCRIPTION
DRFT		WELLS	DATE JAN 06, 2025
CHKD		M. LETTANG	DATE JAN 06, 2025
APPR		M. LETTANG	DATE JAN 06, 2025
3M		© 3M COPYRIGHT 2025	
3M		This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.	
3M PCIE EXTENDER CABLE ASSY GEN 5			
CAGE NUMBER	SIZE	DRAWING NO.	REV.
D	78-5100-2815-8	B	
MODEL		LISTS	
YES		SHT 5 OF 6	

8	7	6	5	4	3	2	1
3M™ TWIN AXIAL PCI EXPRESS EXTENDER ASSEMBLIES GEN 5.0							
Regulatory: For regulatory information about this product, visit 3M.com/regs or contact your 3M representative.							
Technical Information: The technical information, guidance, and other statements contained in this document or otherwise provided by 3M are based upon records, tests, or experience that 3M believes to be reliable, but the accuracy, completeness, and representative nature of such information is not guaranteed. Such information is intended for people with knowledge and technical skills sufficient to assess and apply their own informed judgment to the information. No license under any 3M or third party intellectual property rights is granted or implied with this information.							
Product Use: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. As a result, customer is solely responsible for evaluating the product and determining whether it is appropriate and suitable for customer's application, including conducting a workplace hazard assessment and reviewing all applicable regulations and standards (e.g., OSHA, ANSI, etc.). Failure to properly evaluate, select, and use a 3M product in accordance with all applicable instructions and with appropriate safety equipment, or to meet all applicable safety regulations, may result in injury, sickness, death, and/or harm to property.							
Warranty, Limited Remedy, and Disclaimer: Unless a different warranty is specifically stated on the applicable 3M product packaging or product literature (in which case such warranty governs), 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM, OR USAGE OF TRADE. If a 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement or repair of the 3M product or refund of the purchase price.							
Limitation of Liability: Except for the limited remedy stated above, and except to the extent prohibited by applicable law, 3M will not be liable for any loss or damage arising from or related to the 3M product, whether direct, indirect, special, incidental, or consequential (including, but not limited to, lost profits or business opportunity), regardless of the legal or equitable theory asserted, including, but not limited to, warranty, contract, negligence, or strict liability.							
Disclaimer: For industrial use only. Not intended, labeled or packaged for consumer sale or use.							
3M Company Electronics Materials Solutions Division 13011 McCallen Pass, Bldg. C Austin, TX 78753-5380 1-800-225-5373 www.3M.com/interconnect							
3M™ Display and Electronics Product Platform, (DEPP) Transportation and Electronics Business Group (TEBG) http://www.3M.com/interconnect							
3M IS A TRADEMARK OF 3M COMPANY. FOR TECHNICAL, SALES OR ORDERING INFORMATION CALL 800-225-5373							
8	7	6	5	4	3	2	1

				B 123692		MAY 27, 2025		JNC		MML	
				A 0120684		ADD CE LABEL					
						JAN 06, 2025		GAW		MML	
						PRODUCTION RELEASE					
DESIGN REFERENCE				NEXT ASSEMBLY				REV		ECO	
ACCESS CODES								DATE		JAN 06, 2025	
								MFG		J.G. LIU	
								DATE		JAN 06, 2025	
								APPR		M. LETTANG	
								DATE		JAN 06, 2025	
DIVISION				DIVISION CODE							
DO NOT SCALE DRAWING				SCALE				TOLERANCES EXCEPT AS NOTED			
								3M			
								3M Center St. Paul, MN 55144			
								This document and its contents are 3M property and may not be reproduced or further distributed without the permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.			
								TITLE			
THIRD ANGLE PROJECTION								3M PCIE EXTENDER CABLE ASSY GEN 5			
INTERPRET PER ASME Y14.5 - 2018				MILLIMETERS							
				0 ± 1							
				.0 ± .5							
				.00 ± 0.05							
				.0000 ± .005							
MAX. SURFACE ROUGHNESS								CAGE NUMBER		SIZE	
✓ <input type="checkbox"/> ALL SURFACES								D		DRAWING NO.	
<input type="checkbox"/> MARKED ONLY								078-5100-2815-8		REV.	
								MODEL		DET. LISTS	
										<input checked="" type="checkbox"/> YES <input type="checkbox"/> NO	
										SHT 6 OF 6	