



**SCOTT™**  
Fire & Safety

A full-page background image showing two firefighters in brown turnout gear with reflective yellow-green stripes. They are on a dark, shingled roof. The firefighter on the left is kneeling, and the one on the right is standing and holding a vertical SCBA cylinder. The scene is hazy with smoke or steam in the background under a blue sky with clouds.

Elevating incident command.  
**Safety you can see.**

**3M™ Scott™ SEMS 3.0 Wireless SCBA Telemetry System**  
Part of 3M™ Scott™ Incident Remote Data Collection (RDC)





## The visibility you need, when it matters most.

There's no doubt about it—fire scenes are unpredictable by nature. In such challenging conditions, your team must be able to trust their personal protective equipment (PPE) to protect them in environments that are immediately dangerous to life or health (IDLH).

When you choose the 3M™ Scott™ Air-Pak™ XD SCBA, you and your teams gain access to a whole new generation of monitoring with the SEMS 3.0 Wireless SCBA Telemetry System. When connected to our comprehensive Incident Remote Data Collection (RDC) system, it gives you an unprecedented view into what's happening on the fireground, so you and your team can concentrate on what matters most.

# 3M™ Scott™ SEMS 3.0

## Wireless SCBA Telemetry System

- ✓ Increased range with more powerful radio technology
- ✓ Improved penetration into buildings
- ✓ Greater resistance to Radio Frequency Interference (RFI)



- Incident Command (IC) can access critical SCBA data
- Communicate bi-directionally with IC
- Electronic Personnel Accountability Report (ePAR) reduces excess radio traffic
- New gateway for enhanced wireless connectivity
- Compatible with existing Monitor Pro telemetry software
- Compliant to NFPA 1970 [SCBA] 1982 (PASS), 2025 Edition




SCBA telemetry system providing  
near real-time status and alerts



# What is Incident RDC?

On a fire scene, conditions can change in the blink of an eye. With 3M™ Scott™ Incident Remote Data Collection (RDC), you get a clearer view of conditions on the fireground so you can better monitor the safety of your entire team.

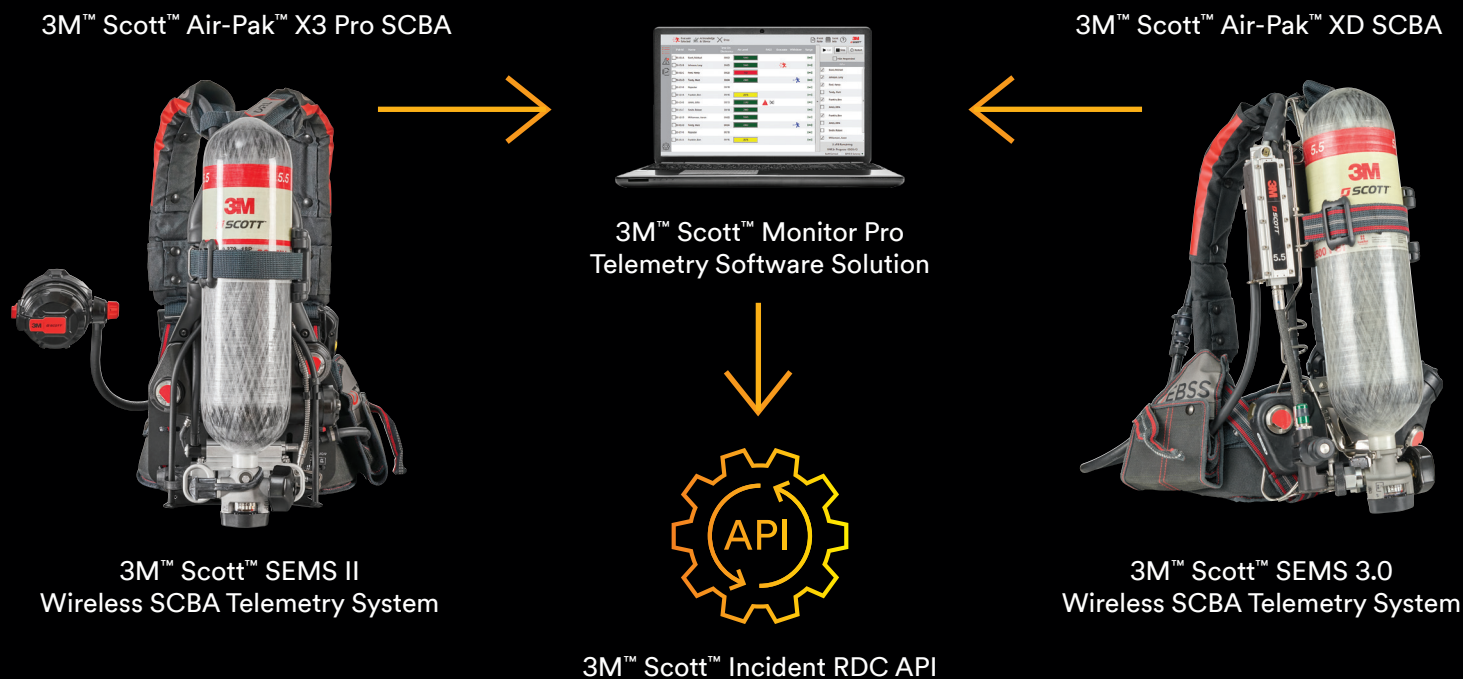

## Incident RDC: A suite of connected solutions

- Critical information about firefighters' air supply
- Wirelessly transmitted to the incident commander
- Seamlessly integrated with authorized third-party incident management software




# See how it all comes together:

**3M™ Scott™ Air-Pak™ XD SCBA**  
Extreme-duty SCBA with our popular “wireformed” backframe, and next-generation connectivity

**3M™ Scott™ Monitor Pro Telemetry Software Solution**  
Tracks critical data on air levels, PASS status, and other alerts

**3M™ Scott™ SEMS 3.0 Gateway**  
Facilitates bi-directional communication between incident command and SEMS 3.0 enabled SCBA

**3M™ Scott™ Incident RDC API**  
Allows SCBA data to be shared with authorized third-party incident management software applications, giving the incident commander all-in-one monitoring capability.








## 3M™ Scott™ Incident RDC API

Leverage SCBA telemetry data within your preferred (authorized) incident management application.

These incident management providers are now empowered to provide incident command with air, PASS and EVAC data while establishing and maintaining command. Additional alert notifications – high-flow or no-flow condition at full-alarm PASS – provide incident command with enhanced situational intelligence to guide critical decision making. The telemetry data is further improved by giving incident command the ability to electronically call for a personnel accountability report (ePAR).



# What's new with SEMS 3.0?

Our latest advancement in wireless SCBA telemetry, SEMS 3.0 builds upon a history of 3M Scott SCBA telemetry systems to help advance firefighter safety. SEMS 3.0 is based on an all-new technology that enhances signal range and penetration, which means greater visibility in large structures and over long distances.

| 3M™ Scott™ Incident RDC Telemetry Systems                                                                                                             |                |            |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|------------|
| Feature                                                                                                                                               | SEMS II        | SEMS 3.0   |
| Compliant to NFPA 1970 [SCBA] 1982 (PASS), 2025 Edition as an RF-Communicating PASS device when used with the Monitor Pro Telemetry Software Solution | ✓              | ✓          |
| Patented, self-healing mesh network                                                                                                                   | ✓              |            |
| Point-to-point long-range network                                                                                                                     |                | ✓          |
| Bi-directional communication of alarms and acknowledgements between responders and incident command                                                   | ✓              | ✓          |
| Real-time SCBA telemetry system providing air level, PASS alarm and evacuation status                                                                 | ✓              | ✓          |
| High-flow and no-flow alert notifications when used with the Monitor Pro Telemetry Software Solution                                                  | ✓              | ✓          |
| Electronic Personnel Accountability Report (ePAR) for improved accountability                                                                         | ✓              | ✓          |
| Increased resistance to radio frequency interference*                                                                                                 |                | ✓          |
| Improved structural penetration*                                                                                                                      |                | ✓          |
| Incident RDC API availability** when used with the Monitor Pro Telemetry Software Solution                                                            | ✓              | ✓          |
| Capable of integrating SCBA data into authorized third-party incident management software programs**                                                  | ✓              | ✓          |
| Gateway with enhanced wireless connectivity*                                                                                                          |                | ✓          |
| Compatibility with 3M™ Scott™ SCBA Models                                                                                                             | Air-Pak X3 Pro | Air-Pak XD |

\* Compared to SEMS II

\*\* Consult your 3M representative for a list of authorized third-party incident management providers





**Schedule a demo with a  
3M expert to see the  
3M™ Scott™ Incident RDC  
System in action.**



**3M™ Scott™ Fire & Safety  
Personal Safety Division**  
Monroe Center, P.O. Box 569  
Monroe, NC 28110

Phone: 1-800-247-7257  
Email: US-3M-ScottMonroeCSR@mmm.com  
Web: 3m.com/ScottFire

3M, Scott and Air-Pak are trademarks of 3M.  
All other trademarks are the property of  
their respective owners. Please recycle.

© 2026, 3M. All rights reserved.  
Unauthorized use prohibited.

**Product Selection and Use:** Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. As a result, customer is solely responsible for evaluating the product and determining whether it is appropriate and suitable for customer's application, including conducting a workplace hazard assessment and reviewing all applicable regulations and standards (e.g., OSHA, ANSI, etc.). Failure to properly evaluate, select, and use a 3M product in accordance with all applicable instructions and with appropriate safety equipment, or to meet all applicable safety regulations, may result in injury, sickness, death, and/or harm to property.

**Warranty, Limited Remedy, and Disclaimer:** Unless a different warranty is specifically stated on the applicable 3M product packaging or product literature (in which case such warranty governs), 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANT ABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR ARISING OUT OF A COURSE OF DEALING, CUSTOM, OR USAGE OF TRADE. If a 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement or repair of the 3M product or refund of the purchase price. Warranty claims must be made within one (1) year from the date of 3M's shipment.

**Limitation of Liability:** Except for the limited remedy stated above, and except to the extent prohibited by applicable law, 3M will not be liable for any loss or damage arising from or related to the 3M product, whether direct, indirect, special, incidental, or consequential (including, but not limited to, lost profits or business opportunity), regardless of the legal or equitable theory asserted, including, but not limited to, warranty, contract, negligence, or strict liability.