

## Product Description

- 3M™ Paint Protection Film Series 150 Gloss is designed to protect automotive paint and other vulnerable surfaces of the vehicle from stone chips, scratches, bug damage, road tar, stains, automotive fluid stains, and punishing outdoor weathering including harsh ultraviolet (UV) radiation
- Guard vehicle paint and other vulnerable surfaces of the vehicle against rocks, keys, salt, bugs, and the elements
- High stain resistance for a low maintenance finish to repel against water and dirt
- Exceptional clarity with lower orange peel to help maintain the brilliance of the vehicle paint
- Highly flexible construction easily stretches over difficult contours and conforms to deep recesses
- Optimized adhesive for repositioning, minimizing lift lines and adhesive marks
- Self-healing technology allows minor scratches to disappear with heat applied to the film surface
- Virtually invisible protection
- 10-year consumer warranty\*

Approved to be used with 3M™ Pattern Marketplace, the latest innovative digital pattern software with thousands of quality-tested paint protection film and auto window film patterns going back more than ten model years. Designed with 3M's installers and products in mind, this cloud-based system offers flexible purchase options, key pattern editing features, and ongoing development to continue delivering intuitive tools to help improve the installation experience.

\* Ask a 3M authorized installer or see the warranty card for complete details.

## Recommended Applications


- Personal and commercial fleet vehicles



The applications shown above indicate typical areas of placement for personal vehicles. Actual film placement will vary according to the needs of the customer.

## Product Line

Product Name	Description
3M™ Paint Protection Film Series 150 Gloss	Transparent film with a glossy finish

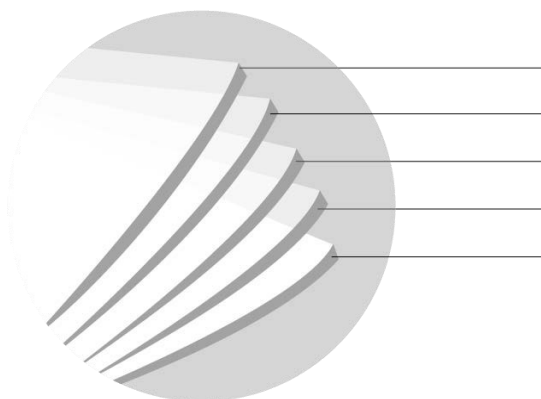

Cap Sheet — Polyester (not applicable to all areas)

Clearcoat — Polyurethane

Film — Polyurethane

Adhesive — Acrylic PSA

Release Liner — Polyester

## Physical Characteristics

These are the typical values for unprocessed products. Processing may change the values.

### Physical Properties

NOTE: The following technical information and data should be considered representative or typical only and should not be used for specification purposes.

Characteristic	Value
Material	Polyurethane
Color	Transparent
Thickness	<b>Film with adhesive:</b> 0.19 mm (7.5 mil) <b>Liner:</b> 0.08 mm (2.9 mil) <b>Cap sheet:</b> 0.05 mm (2.0 mil)
Adhesive	Acrylic, pressure-activated
Adhesive Appearance	Clear
Adhesion on Automotive Paint (180° peels)*	<b>Initial Adhesion (20 minutes at room temperature):</b> 6.6 N/cm (3.8 lbs/in.) <b>Final Adhesion (24 hours at room temperature):</b> 7.9 N/cm (4.5 lbs/in.)
Elongation at Break	400%
Tensile Strength at Maximum Force	2,500 PSI (17.2 MPa)
Liner	Polyester

\* 3M Commercial Branding and Transportation Division products are not tested against automotive manufacturer specifications.

## Application Characteristics

Characteristic	Value
Application Method	Wet only
Substrate Types	OEM painted surfaces*
Application Temperatures	16°C to 30°C (60°F to 85°F)

\* See [3M™ Paint Protection Film Installation Guidelines](#) for complete details.

## Installation

### IMPORTANT NOTE

For optimal application of paint protection film on the vehicle, install at temperatures of 21°C to 26°C (70°F to 79°F).

## Maintenance and Cleaning

- The cleaner must be wet, non-abrasive, without solvents, and have a pH value between 6 and 8 (neither strongly acidic nor strongly alkaline).
- 3M™ Perfect-It™ Show Car Paste Wax (PN 39526) can be applied after several days or within a couple of months after the installation of 3M™ Paint Protection Film Series 150 Gloss. Users must then regularly wash and recoat the surface going forward.
- Do NOT use waxes containing dyes, abrasive polishes, and/or rubbing compounds. The abrasive particles will damage the film surface and result in a loss of surface quality.

## Removal

3M recommends using a heat gun or steamer to aid removal. The correct angle of removal is 30 to 60 degrees from the surface of the paint.

## Shelf Life and Storage

The shelf life is an indicative and maximum data, subject to many external and non-controllable factors. It may NEVER be interpreted as a warranty. The shelf life is 18 months from the date of manufacture on the original box.

### IMPORTANT NOTE

3M recommends storage conditions of 16°C to 30°C (60°F to 85°F), out of sunlight, in the original container, and in a clean and dry area.

## Health and Safety

### Tools and Equipment Usage

When using any equipment, always follow the manufacturer's instructions for safe operation.

### Chemicals

When handling any chemical products, read the manufacturers' container labels and the Safety Data Sheets (SDS) for important health, safety, and environmental information.

[Follow this link to obtain SDS sheets for 3M products.](#)

[Follow this link to obtain information about substances of very high concern \(SVHC\) for EU products.](#)

## Warranty Information

### Technical Information

Technical information, guidance, and other statements provided by 3M are based upon records, tests, or experience that 3M believes to be reliable, but the accuracy, completeness, and representative nature of such information is not guaranteed. Such information is intended for people with knowledge and technical skills sufficient to assess and apply their own informed judgment to the information. No license to any intellectual property rights is granted or implied with respect to this technical information.

### Product Selection and Use

Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. Customer is solely responsible for evaluating the product and determining whether it is appropriate and suitable for customer's application, including conducting a workplace hazard assessment, reviewing all applicable regulations and standards, and reviewing the product label and use instructions. Failure to properly evaluate, select, and use a 3M product in accordance with instructions or to meet all applicable safety regulations may result in injury, sickness, death, and/or harm to property.

### Warranty, Limited Remedy, and Disclaimer

Unless a different warranty is specifically stated on the applicable 3M product packaging or product literature (in which case such warranty governs), 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY WARRANTY OR CONDITION OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR ARISING OUT OF A COURSE OF DEALING, CUSTOM, OR USAGE OF TRADE. If a 3M product does not conform to this warranty, the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

### Limitation of Liability

All questions of warranty and liability relating to this product are governed by the terms and conditions of the sale, subject, where applicable, to the prevailing law. 3M Commercial Branding and Transportation products are not tested against automotive manufacturer specifications!

#### 3M United Kingdom PLC

Commercial Branding and Transportation Division  
Cain Road  
Bracknell, RG12 8HT  
UK

© 3M 2025. All rights reserved.

3M and Perfect-it are trademarks of 3M.

All other trademarks are the property of their respective owners.

Revision A, March 2025 Please recycle.