



# Concrete Repair


*5 minutes fast for safety and appearance*

Cracks and spalls in concrete floors are an eyesore as well as a potential safety risk. Fixing them has meant either hiring and waiting for an outside contractor or doing it yourself with a repair method that takes the floor out of service for up to 24 hours. Now with 3M™ Concrete Repair, you save money and time.

- Self-leveling urethane flows smoothly into cleaned cracks and gaps and hardens in as little as 5 minutes. A fork lift can pass over a repair in as few as 15 minutes.
- Hardens to any depth without cracking or shrinking.
- Flexible urethane expands and contracts for durability that outlasts repairs made with concrete.
- Solvent-free
- Do it yourself with a common caulking gun and eliminate the cost and wait for an outside contractor.\*



*Easy to use – Just clean damaged area and fill. With every squeeze of the caulking gun trigger, cartridge nozzle meters and mixes precise proportions for optimum performance.*

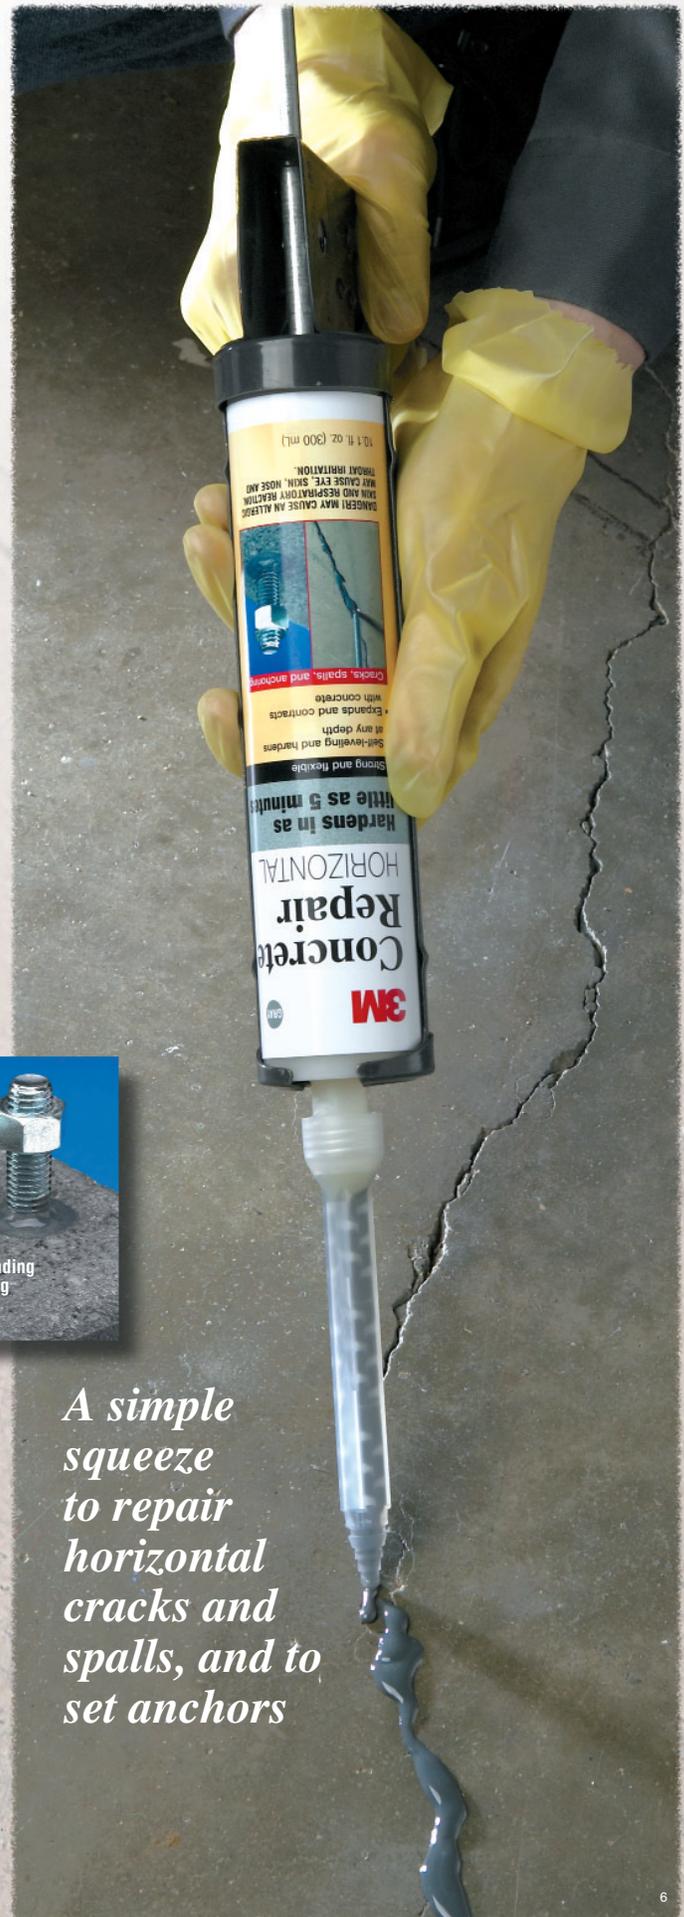

*A simple squeeze to repair horizontal cracks and spalls, and to set anchors*

\*Read product label instructions and precautions before applying.

# 3M™ Concrete Repair– Horizontal

Product#	Description	Contents	Work Life	Handling Time	Cure Time	Pack
DP-600	Gray, self-leveling urethane concrete repair	<ul style="list-style-type: none"> <li>8.4 fl. oz. cartridge of concrete repair</li> <li>2 nozzles</li> </ul>	70 sec.	5 min.	60 min.	6/case

## Applications:

- Repairing cracks and spalls on concrete floors or horizontal surfaces
- Setting anchors in concrete floors or horizontal surfaces
- Light-duty custom threading and anchoring
- Use outdoors or in highly ventilated area

## Approximate Coverage

Crack Width	Crack Depth	Linear Feet per 8.4 fl. oz.
1/4"	1/4"	19.3
1/2"	1/4"	9.9
3/4"	1/4"	6.4
1"	1/4"	4.9
1/4"	1/2"	9.9
1/2"	1/2"	4.9
3/4"	1/2"	3.0
1"	1/2"	2.0

Bead Size Dimension	Linear Feet per 8.4 fl. oz.
1/16"	815.0
1/8"	205.0
1/4"	51.9
3/8"	22.2
1/2"	12.4



## Quick and Easy Spall Repair

### Clean

Remove all loose materials from area to be filled. Concrete should be dry and grease-free.

### Fill

Dispense product into deepest part of repair area, slightly overfilling. Product self-levels and is tack-free in as little as one minute.

### Finish

In as little as 15 minutes, product can be sanded to remove rough edges. It can be painted within one hour.

**Product Use:** All statements, technical information and recommendations contained in this document are based upon tests or experience that 3M believes are reliable. However, many factors beyond 3M's control can affect the use and performance of a 3M product in a particular application, including the conditions under which the product is used and the time and environmental conditions in which the product is expected to perform. Since these factors are uniquely within the user's knowledge and control, it is essential that the user evaluate the 3M product to determine whether it is fit for a particular purpose and suitable for the user's method of application.

**Warranty and Limited Remedy:** Unless stated otherwise in 3M's product literature, packaging inserts or product packaging for individual products, 3M warrants that each 3M product meets the applicable specifications at the time 3M ships the product. Individual products may have additional or different warranties as stated on product literature, package inserts or product packages. 3M MAKES NO OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. User is responsible for determining whether the 3M product is fit for a particular purpose and suitable for user's application. If the 3M product is defective within the warranty period, your exclusive remedy and 3M's and seller's sole obligation will be, at 3M's option, to replace the product or refund the purchase price. **Limitation of**

**Liability:** Except where prohibited by law, 3M and seller will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



### Industrial Business Industrial Adhesives and Tapes Division

3M Center Bldg. 21-1W-10  
900 Bush Avenue,  
St. Paul, MN 55144-1000  
1-800-362-3550  
www.3M.com/adhesives



Recycled paper  
40% pre-consumer  
10% post-consumer

Printed in U.S.A.

© 3M 2004 78-9236-7109-9