


# Maintenance Procedure for 3M™ Static Control Vinyl “No Wax” Floor Tile 8400

**Caution**  
**NEVER APPLY WAX OF ANY KIND TO 3M™ TILE 8400**

Carefully read and follow all product literature including all safety, health and environmental information found in the material safety data sheet and/or product label of chemicals prior to handling or use.

Install a 3M™ Nomad™ Entrance Matting System at all entry doors to minimize the amount of dirt tracked into the facility

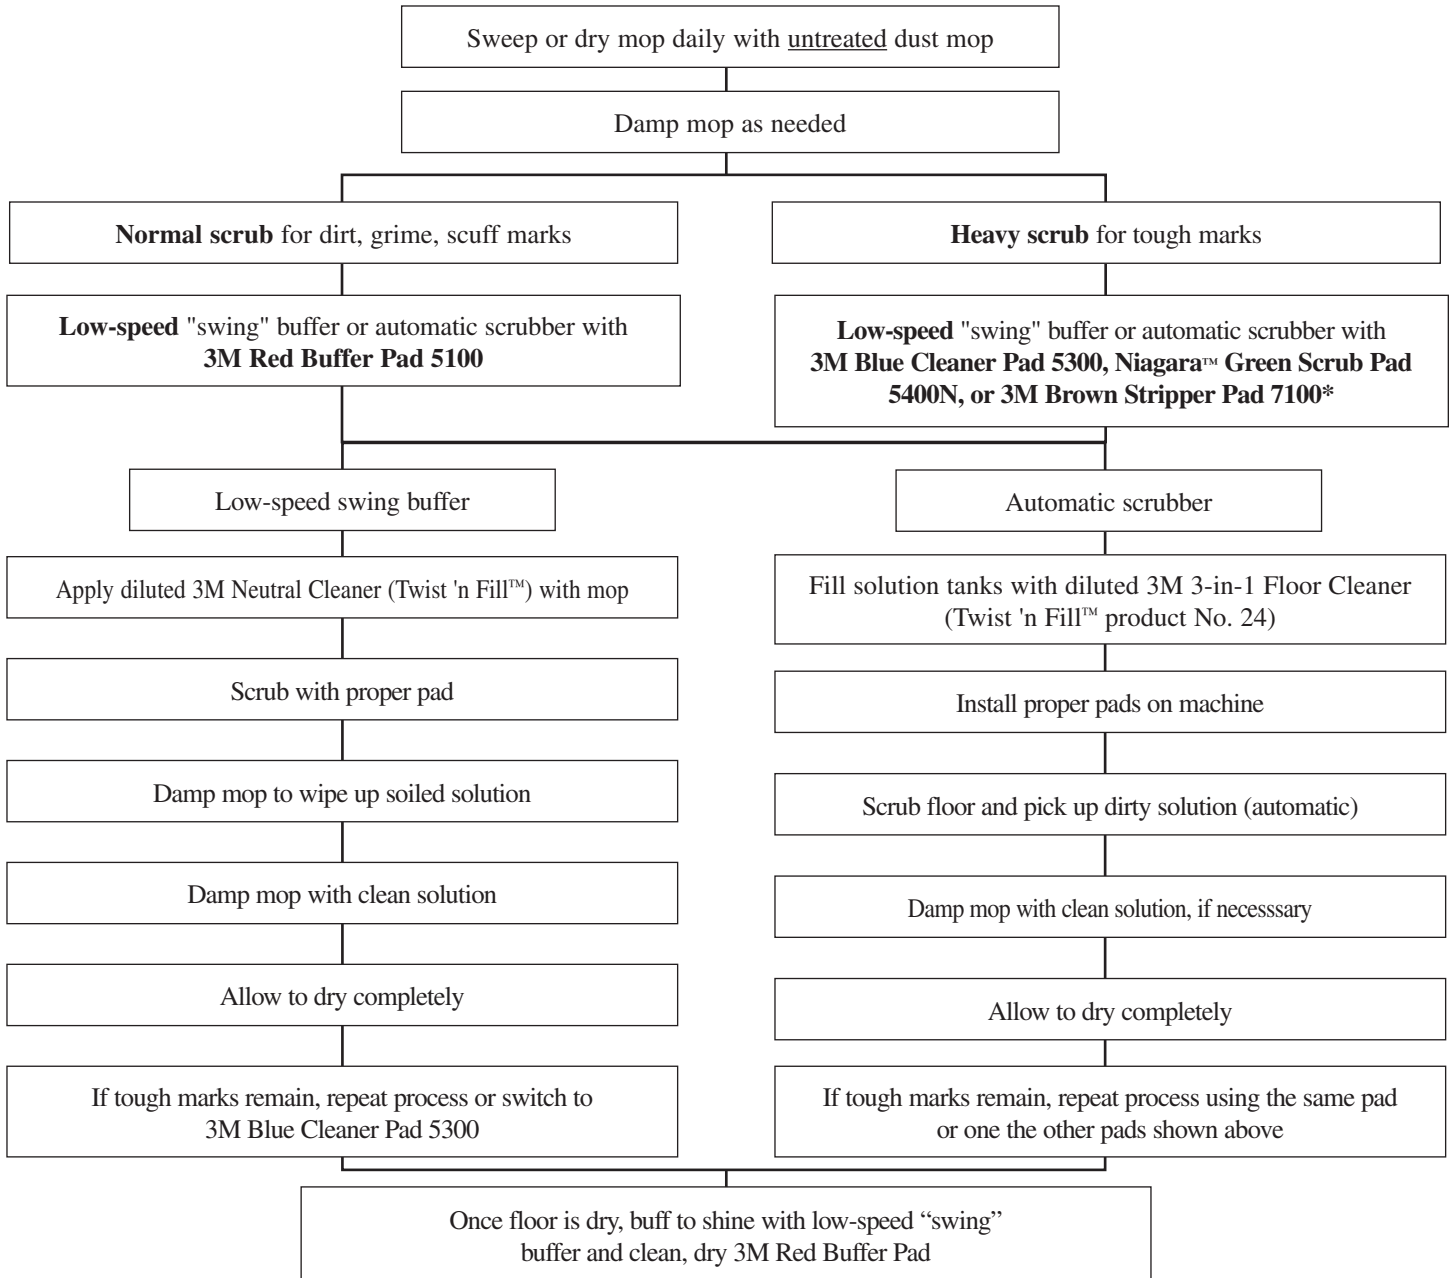

3M, Nomad, Niagara and Twist 'n Fill are trademarks of 3M Company.



**Electronic Solutions Division**  
6801 River Place Blvd.  
Austin, TX 78726-9000  
800/328-1368  
www.3M.com/eisd

\* Liberally apply cleaning solution when using the 7100 pad to avoid damaging floor.

FOR TECHNICAL ASSISTANCE, CALL 800/328-1368