

Zeta Plus™ 40Q Purifier Cartridges

Superior Removal of Trace Metals From High Purity Chemicals

Zeta Plus™ 40Q purifier cartridges are high capacity purifiers designed to remove metallic ion contaminants from high purity chemicals such as resins, photoresists, and solvents in a single pass. The purifier contains ion exchange groups that have been bonded within a porous depth media structure. This construction enhances surface area for the ion exchange groups assuring metallic contaminant removal to single digit ppb levels.

Zeta Plus™ 40Q Purifier Cartridge Vs. Ion Exchange Columns

Ion exchange columns, a process step commonly used to remove trace metal ions from high purity chemicals are often the limiting factor in reducing the manufacturing cycle. Ion exchange columns are comprised of resin beads, which typically have a particle size distribution ranging between 0.3 mm and 1.2 mm in diameter, and are packed into a column. When the resin beads are packed into the column they cause a high differential pressure as the highly viscous fluid flows down through the column. Because a finite space exists between ion exchange resin beads, void or interstitial volume is formed.



Features & Benefits

Zeta Plus™ 40Q Metal Ion Removal Media

- Reduces trace metals to single digit ppb levels
- Superior metal removal capacity, lower cost-of-ownership

Graded Density Construction

- Large surface area increases contact time between the fluid and reactive sites of the purifier
- Increases purifier lifetime

High Flow Rates

- Increased throughputs as compared to ion exchange columns

Wide Range of Configurations

- Allows for the same purification media to be used during laboratory, pilot and full production scale-up
- Low hold-up volume disk filters allow material suppliers to perform testing in a rapid and cost-effective manner
- Purification media can be customized to the specific application

Low Cartridge Extractables

- No leaching of contaminants into the process fluid

Quality Manufacturing

- ISO 9001:2008 Registered Quality Management System
- Repeatable and reliable performance

Applications

- Resins
- Solvents
- Recirculation Baths
- I Line Photoresists
- G Line Photoresists
- Acetone
- IPA

Table 1: Single Pass Metals Removal from PGMEA/PGME (30/70 Mixture)

Metal	Detection Limit (ppb)	Influent Level (ppb)	Effluent Level (ppb)
Al	0.2	10	< D.L.*
Ca	0.2	15	< D.L.
Cr	0.2	10	< D.L.
Cu	0.2	9	< D.L.
Fe	0.2	9	< D.L.
K	0.2	8	< D.L.
Mg	0.2	8	< D.L.
Mn	0.2	11	< D.L.
Na	0.2	9	1.6
Ni	0.2	8	< D.L.
Pb	0.2	10	< D.L.
Zn	0.2	7	< D.L.

*Detection limit.

Table 2: Single Pass Metals Removal from PGMEA

Metal	Detection Limit (ppb)	Influent Level (ppb)	Effluent Level (ppb)
Ca	< 10	1160	< D.L.
Fe	< 10	838	< D.L.
Na	< 10	902	< D.L.

Table 3: Single Pass Metals Removal from ECA

Metal	Detection Limit (ppb)	Influent Level (ppb)	Effluent Level (ppb)
Ca	< 10	590	< D.L.
Fe	< 10	230	< D.L.
Na	< 10	850	< D.L.

Table 4: Extractable Metals Content of Zeta Plus™ 40Q Purifier Cartridge in PGMEA

Metal	Detection Limit (ppb)	Effluent Level (ppb)
Ca	4.0	< D.L.
Cr	2.0	< D.L.
Cu	1.0	< D.L.
Fe	5.0	< D.L.
K	1.0	< D.L.
Na	5.0	< D.L.

When a high purity chemical is introduced to the ion exchange column, the fluid will take the path of least resistance through the column, which is commonly referred to as “channeling”. To minimize the channeling effect, the ion exchange column is operated at a very low flow rate which in turn increases the contact or “residence time” with the fluid. Residence is described as the period of time when the fluid and functional sites of the ion exchange resin are in contact. Even with low flow rates and long residence times, ion exchange columns typically cannot reduce the trace metal content to the required specification levels in a single pass. One reason for this is that the ion exchange resin beads have a relatively low surface area to volume ratio and another reason is that a large void volume exists between each resin bead. When these two factors are combined the process fluid is not able to fully access the ion exchange sites thereby resulting in a less efficient means of purification. For this reason, it is often necessary to run the ion exchange column in re-circulation mode until the required parts-per-billion levels for trace metals is achieved. This is particularly true with high viscosity chemicals. While this technology is effective at reducing trace metal and ionic contaminants it lacks the throughput that material suppliers require.

During the manufacturing process, molecules carrying a positive charge are chemically bonded to the filter matrix permanently forming an interconnected filtration structure with positively charged electrokinetic capture sites. The resulting porous depth filter is a tortuous network of charge-enhanced flow channels capable of removing bacteria, particulate, cellular debris and submicronic contaminants to a level which mechanical screening alone cannot achieve.

3M Purification has developed a chemically modified purifier that is capable of removing metallic or ionic contaminants from photoresists, resins, solvents, and ancillary chemicals while improving flow and throughput. This is accomplished by maximizing purification surface area, which reduces the potential for channeling and increases the contact time between the chemical and reactive sites of the purifier. This increase in purification surface area is achieved by using the Zeta Plus 40Q purifier cartridge metal ion removal media.

Superior Metals Removal Capacity Provided by Zeta Plus™ 40Q Purifier Cartridge

Zeta Plus 40Q purifier cartridges contain multiple ion exchange groups that reduce trace metals such as Na, Fe, K, and Ca to single digit parts per billion levels in single pass or recirculation mode applications. Unlike competitive purifiers that only contain ion exchange technologies on the surface of the media, Zeta Plus 40Q purifier cartridges are able to purify ionic contaminants throughout the entire depth of the media. This design provides a more efficient means of purification per surface area while increasing flow and lifetime. Tables 1, 2, and 3 show the metal removal performance of Zeta Plus 40Q purifier cartridge in propylene glycol monomethyl ether acetate (PGMEA), propylene glycol monomethyl ether (PGME), and ethyl cellosolve acetate (ECA). Metals removal was quantified using a graphite furnace atomic absorption spectrometer.

Zeta Plus™ 40Q Purifier Cartridge Extractables

The purifier’s clean materials of construction ensure that ionic, organic, and metallic contaminants are not being added back into the process chemical. Ionic, organic, and metallic contaminants can extract from other filter materials, which may change the photo-speed, viscosity, or molecular weight of the chemical. A static soak test was performed to determine the amount of contaminants extracted from the solvent PGMEA. After a 24-hour static soak, extractables were quantified using a graphite furnace atomic absorption spectrometer (Table 4).

Zeta Plus™ 40Q Purifier Cartridge Purifier Scale-Up

For laboratory and pilot scale testing, 3M Purification offers low hold-up volume Zeta Plus 40Q purifier disks (47 mm) and housings to allow end users to assess parameters such as material compatibility, photo-speed, and trace metals removal in a rapid and cost effective manner. The compact size allows for easy replacement and installation of purification media while reducing the waste of expensive chemicals. Zeta Plus 40Q purifier cartridge disks contain the same filter media as full size Zeta Plus 40Q purifier cartridges, ensuring repeatable and reliable performance throughout laboratory, pilot, and full production testing. This makes the scale-up process simple, linear, and predictable.

In full scale production, Zeta Plus 40Q purifier cartridge is offered in cartridge diameter sizes of 8", 12", and 16" providing up to 34.7 ft.² (3.2m²) of surface area in a single cartridge. Zeta Plus Housings can vertically accommodate 1, 2, 3, or 4 Zeta Plus 40Q purifier cartridges, allowing the end user to tailor the filtration system to their required flow rate.



Zeta Plus™ 40Q Purifier Cartridge Lifetime

The lifetime of the purifier will vary based on the ionic contamination loading in the fluid, the batch or bath size, and the desired metal effluent specification. As a result, the purifier should be sized based on the desired flow rate for the application. 3M Purification recommends ≤0.25 gpm (0.95 lpm) flow rate per 1 ft.² (0.09m²) of Zeta Plus 40Q purifier cartridge media for a 1 cps fluid and ≤0.1 gpm (0.38 lpm) flow rate per 1 ft.² (0.09m²) of Zeta Plus 40Q purifier cartridge media for 10 to 100 cps fluids. For fluids greater than 100 cps, consult the factory. Table 5 provides the recommended flow rate for each Zeta Plus 40Q purifier cartridge available.


Table 5: Recommended Flow Rate per Cartridge Configuration

Catalog Number	Max Flow Rate: 1 cps fluids		Max Flow Rate: 10–100 cps fluids	
	GPM	LPM	GPM	LPM
Z8F (8" – 2 cell)	0.20	0.76	0.08	0.30
45167 (8" – 7 cell)	0.75	2.85	0.30	1.14
45244-01 (12" – 9 cell)	2.3	8.5	0.9	3.4
45245-01 (12" – 16 cell)	4.0	15.1	1.6	6.1
Z16P (16" – 14 cell)	9.3	35.0	3.7	14.0

Table 6: Product Specifications

Catalog Number	Nominal Diameter		Height		Media Surface Area	
	Inches	mm	Inches	mm	Feet ²	M ²
Z8F (8" – 2 cell)	8	203	3-15/32	88	0.7	0.065
45167 (8" – 7 cell)	8	203	6-5/8	168	2.5	0.23
45244-01 (12" – 9 cell)	12	273	7-9/16	192	9.2	0.90
45245-01 (12" – 16 cell)	12	273	10-3/4	273	16.4	1.5
Z16P (16" – 14 cell)	16	406	10-3/4	273	34.7	3.2
Maximum Operating Temperature			176°F (80°C)			
Maximum Differential Pressure			35 psid @ 176°F (2.4 bar @ 80°C)			

Figure 1: Zeta Plus™ 40Q Purifier Cartridge Construction

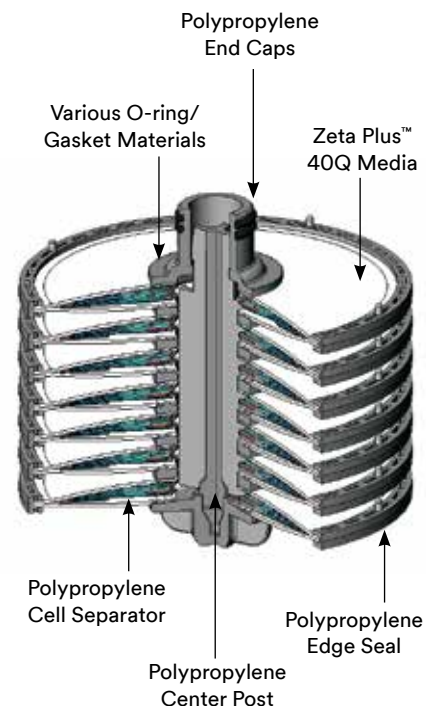

Zeta Plus™ 40Q Purifier Cartridges Ordering Guide

Zeta Plus™	Configuration	2-123 O-Ring Material	Packaging	Grade	Zeta Plus™ 40Q Purifier Disk	
Z8F (8" – 2 Cell) SOE Cartridge	A2NP	B – Fluorocarbon C – EPR K – PTFE Encapsulated Fluorocarbon	2	40Q	47 mm Disk	B0204-40Q

Configuration	2-123 O-Ring Material	Grade
45167 (8" – 7 cell) SOE Cartridge	O2 – EPR O3 – Fluorocarbon O9 – PTFE Encapsulated Fluorocarbon	40Q

Configuration	DOE Gasket Material	Grade
45244-01 (12" – 9 cell)	B – Fluorocarbon C – EPR E – PTFE	40Q
Z16P (16" – 14 cell)	B – Fluorocarbon C – EPR E – PTFE	40Q

PLEASE NOTE: The Ordering Guide above is for reference only. Not all combinations are available. Please consult with your 3M Representative to determine the appropriate part number for your application.

Technical Information
The technical information, guidance, and other statements contained in this document or otherwise provided by 3M are based upon records, tests, or experience that 3M believes to be reliable, but the accuracy, completeness, and representative nature of such information is not guaranteed. Such information is intended for people with knowledge and technical skills sufficient to assess and apply their own informed judgment to the information. No license under any 3M or third party intellectual property rights is granted or implied with this information.
Product Selection and Use
Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. As a result, customer is solely responsible for evaluating the product and determining whether it is appropriate and suitable for customer's application, including conducting a workplace hazard assessment and reviewing all applicable regulations and standards (e.g., OSHA, ANSI, etc.). Failure to properly evaluate, select, and use a 3M product and appropriate safety products, or to meet all applicable safety regulations, may result in injury, sickness, death, and/or harm to property.
Warranty, Limited Remedy, and Disclaimer
Unless a different warranty is specifically stated on the applicable 3M product packaging or product literature (in which case such warranty governs), 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR ARISING OUT OF A COURSE OF DEALING, CUSTOM, OR USAGE OF TRADE. If a 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.
Limitation of Liability
Except for the limited remedy stated above, and except to the extent prohibited by law, 3M will not be liable for any loss or damage arising from or related to the 3M product, whether direct, indirect, special, incidental, or consequential (including, but not limited to, lost profits or business opportunity), regardless of the legal or equitable theory asserted, including, but not limited to, warranty, contract, negligence, or strict liability.



Your local distributor:

3M Purification Inc.
3M Separation and Purification Sciences Division
400 Research Parkway
Meriden, CT 06450 USA

Phone 1-800-243-6894
1-203-237-5541
Fax 1-203-630-4530
Web 3Mpurification.com

3M and Zeta Plus are trademarks of 3M Company.
All other trademarks are the property of their respective owners.
© 2018 3M Company. All rights reserved. Please recycle. Printed in U.S.A.
70020188515 REV 0718sr