

# 3M™ 9915 Nuisance Level Acid Gas Respirator

1. First pre-stretch each strap by pulling between both hands at 1-2 inch intervals around the entire length of the strap.

2. Cup the respirator in your hand with the nose-piece at your fingertips allowing the headbands to hang freely below your hand.

3. Position the respirator under your chin with the nosepiece up.

4. Pull the top strap over your head resting it high at the top back of your head. Pull the bottom strap over your head and position it around the neck below the ears.


5. Place the fingertips of both hands at the top of the metal nosepiece. Mould the nosepiece to the shape of your nose by pushing inward while moving your fingertips down both sides of the nosepiece. Pinching the nosepiece using one hand may result in less effective respirator performance.

6. The seal of the respirator on the face should be fit-checked prior to wearing in the work area.  
 a) Cover the front of the respirator with both hands, being careful not to disturb the position of respirator.  
 b) Exhale sharply.  
 A positive pressure should be felt inside the respirator. If any leakage is detected, adjust position of respirator and/or tension of strap. Retest the seal. Repeat the procedure until the respirator is sealed properly.

**If you cannot achieve a proper fit, do not enter the contaminated area. See your supervisor.**



# 3M™ 9915 Nuisance Level Acid Gas Respirator

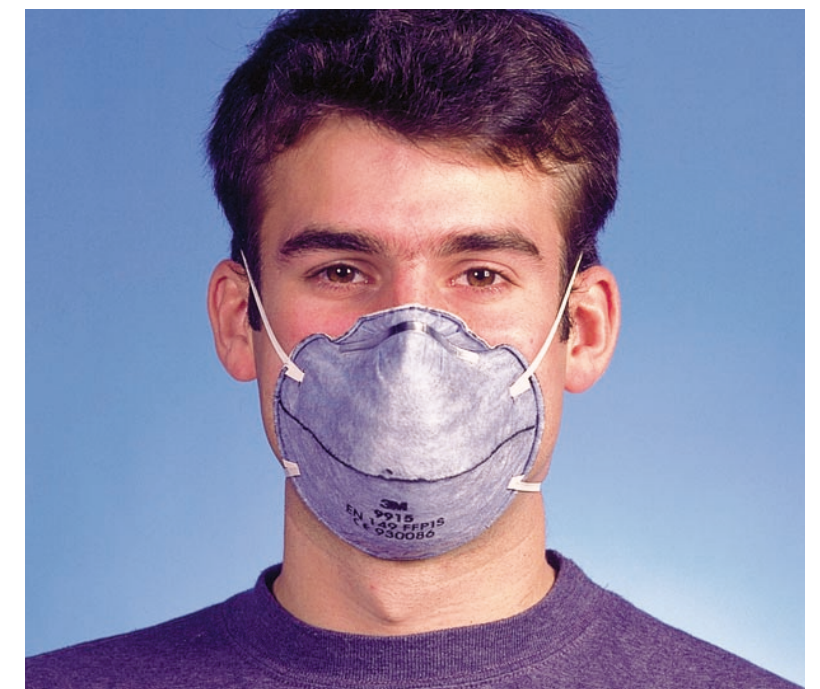

## 3M 9915 Nuisance Level Acid Gas Respirator

Standard: EN149  
 Type: FFP1  
 Maximum Use Concentrations:  
 4 x WEL\* for Particulates  
 Offers relief against low level (below WEL)  
 Acid gases with good warning properties  
 Approval: CE marked

\*Workplace Exposure Limit

This respirator should not be used in oxygen deficient environments, for escape purposes or by people with beards/ facial hair or in atmospheres where concentrations of contaminant may exceed that deemed Immediately Dangerous to Life and Health (IDLH)

