



3M™ Direct Bury Splice kit DBR/Y-6

Instructions

600V Maximum
Application Temperature 32°F - 120°F (0°C - 49°C)
Maximum Operating Temperature 221°F (105°C)



UL Standard 486D, 3M File No E102356
For use in damp, wet, direct bury, and submersible locations


Meets European Standard EN 61984
Applicable rating under standard EN 60529: IP68 (up to 1.83m and 30 minutes),

CAUTION

Working around energized systems may cause serious injury or death. Installation should be performed by personnel familiar with good safety practice in handling electrical equipment. De-energize and ground all electrical systems before installing product.

Installation

1. Strip Insulation 3/4".



2. With wire ends even, insert wires into the connector and tighten until secure.




3. Insert the connector all the way into the tube until the connector rests on the bottom.






Note: If having difficulty getting the twist-on connector down into the tube when using small gauge wires, use a thin, non-conductive object to push the connector to the bottom of the tube. Upon removal of the object, ensure that no voids or water paths remain in the grease.

4. Fold the wires into the channels.

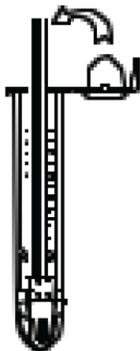

5. Close the cap.

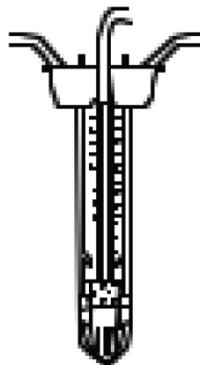

**Common AWG Combinations
Copper Wire Only, Solid or Stranded* unless noted**

2 – 7 #18	1 – 3 #12 w/ 1 #18
2 – 6 #16	1 – 2 #10 sol w/ 1 #18 str
2 – 4 #14	1 – 3 #12 w/ 1 #16
2 – 4 #14	1 – 2 #10 w/ 1 #12
2 – 3 #10	1 – 2 #14 w/ 1 #18

*See data sheet for all combinations

No adverse health effects expected.
Contains white mineral oil grease, CAS# 8042-47-5

3M is a trademark of 3M Company.



Product Selection and Use: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. As a result, customer is solely responsible for evaluating the product and determining whether it is appropriate and suitable for customer's application, including conducting a workplace hazard assessment and reviewing all applicable regulations and standards (e.g., OSHA, ANSI, etc.). Failure to properly evaluate, select, and use a 3M product in accordance with all applicable instructions and with appropriate safety equipment, or to meet all applicable safety regulations, may result in injury, sickness, death, and/or harm to property.

Warranty, Limited Remedy, and Disclaimer: Unless a different warranty is specifically stated on the applicable 3M product packaging or product literature (in which case such warranty governs), 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR ARISING OUT OF A COURSE OF DEALING, CUSTOM, OR USAGE OF TRADE. If a 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement or repair of the 3M product or refund of the purchase price. Warranty claims must be made within one (1) year from the date of 3M's shipment.

Limitation of Liability: Except for the limited remedy stated above, and except to the extent prohibited by applicable law, 3M will not be liable for any loss or damage arising from or related to the 3M product, whether direct, indirect, special, incidental, or consequential (including, but not limited to, lost profits or business opportunity), regardless of the legal or equitable theory asserted, including, but not limited to, warranty, contract, negligence, or strict liability.

Disclaimer: 3M industrial and occupational products are intended, labeled, and packaged for sale to trained industrial and occupational customers for workplace use. Unless specifically stated otherwise on the applicable product packaging or literature, these products are not intended, labeled, or packaged for sale to or use by consumers (e.g., for home, personal, primary or secondary school, recreational/sporting, or other uses not described in the applicable product packaging or literature), and must be selected and used in compliance with applicable health and safety regulations and standards (e.g., U.S. OSHA, ANSI), as well as all product literature, user instructions, warnings, and limitations, and the user must take any action required under any recall, field action or other product use notice. Misuse of 3M industrial and occupational products may result in injury, sickness, or death. For help with product selection and use, consult your on-site safety professional, industrial hygienist, or other subject matter expert. For additional product information, visit www.3M.com.



Electrical Markets Division
13011 McCallen Pass Bldg. C
Austin, Texas 78753
Tel: 800.245.3573
Fax 800.245.0329
www.3M.com/electrical

Please Recycle. Printed in USA.
© 3M 2021 All Rights Reserved.
78-8129-9276-2 D