

# 3M™ Fiber Dome Terminal Closures FDTC 08M and FDTC 08S Direct Splice Drop Termination

The compact 3M™ Fiber Dome Terminal Closures FDTC 08M and FDTC 08S are hermetically sealed fiber dome terminal closures for aerial, buried above-grade, and buried below-grade applications. These terminal closures meet the needs of almost anyone deploying FTTP networks.

They accommodate 4, 6, or 8 direct fusion or mechanical spliced drop terminations. The oval main cable port accommodates two 20 mm (0.79") all-dielectric or armored cables. The branch splice capacity for the FDTC 08M closure is 36 single and 108 mass fusion. The branch splice capacity for the FDTC 08S closure is 72 single and 216 mass fusion. The FDTC 08M and FDTC 08S closures are designed for butt, single or ribbon fiber applications.

These compact terminal closures require no special tools, which may reduce tooling costs, and allows for ease of installation and re-entry into the terminal closure.

The terminal closures feature a fixed O-ring sealing system along with an innovative latching mechanism. This combination provides for simple closure sealing and re-entry.

The fiber dome terminal closures FDTC 08M and FDTC 08S utilize the 3M External Cable Assembly Module (ECAM) built-in drop entry port system. The ECAM design allows true plug-and-play capability which may reduce installation and labor costs because the drop preparation is completed outside of the terminal closure body. Also, the built-in drop entry system allows the technician to add and remove drops without disturbing previously installed drops. The terminal closures FDTC 08M and FDTC 08S are Rural Development (RUS) Listed.



3M™ Fiber Dome Terminal Closure FDTC 08M  
Direct Splice Drop Termination




3M™ Fiber Dome Terminal Closure FDTC 08S  
Direct Splice Drop Termination


Features	Benefits
Compact size	Fits into small pedestals and handholes
Constructed of highly chemical-resistant material	Can be deployed in most environments: buried, underground and aerial
ECAM port design with true plug and play capability	Cost effective: cable and drop preparation is completed outside of the terminal closure
Built-in drop entry termination system	Permits re-entry into the closure without breaking the drop seals
No special tools required	Simple installation and re-entry
Fixed O-ring seal	Easy terminal closure sealing and re-entry
Innovative latching mechanism	Simple re-entry into terminal closure by lifting the dome lid away from the base



## 3M™ Fiber Dome Terminal Closure FDTC 08M Direct Splice Drop Termination

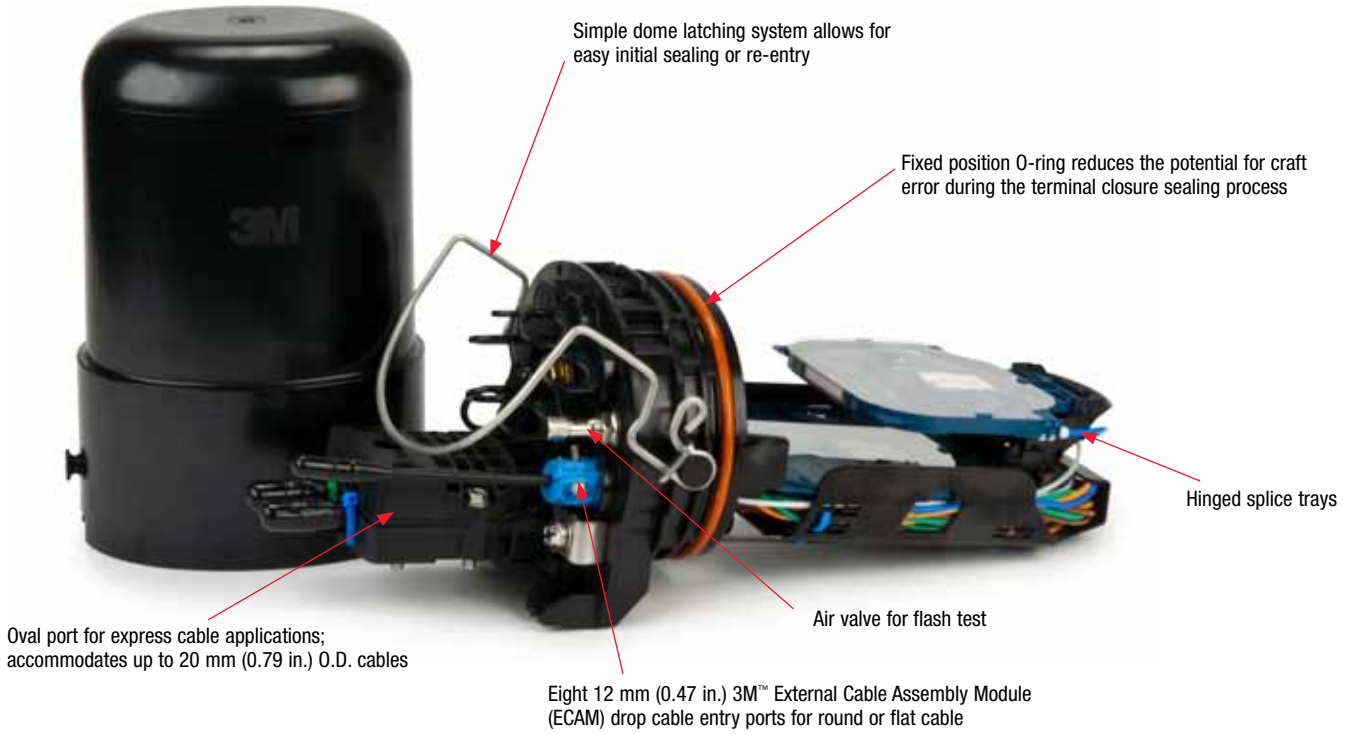

## 3M™ Fiber Dome Terminal Closure FDTC 08S Direct Splice Drop Termination

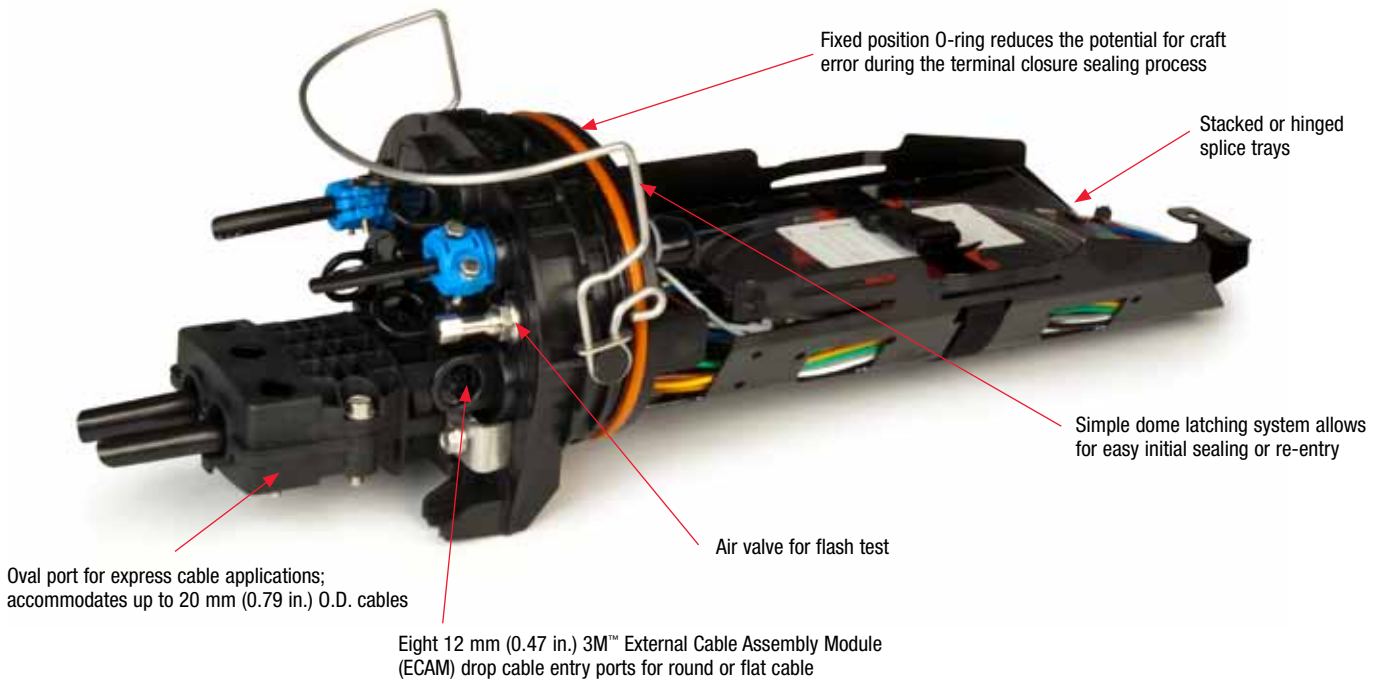

# 3M™ 12 mm External Cable Assembly Module (ECAM) Drop Cable Entry System

Each drop has a separate seal (grommet and O-ring), strain-relief bracket, and strength member retention lug.



3M™ Fiber Dome Terminal Closure FDTC 08ME  
Direct Splice Drop Termination Port Layout



3M™ Fiber Dome Terminal Closure FDTC 08M  
and FDTC 08S Direct Splice Drop Termination  
Port Layout



3M™ 12 mm External Cable Assembly Module  
(ECAM) Cable Entry Port

## Specifications

	FDTC 08M	FDTC 08ME	FDTC 08S
<b>Dimensions L x W (dia) x H mm (in.)</b>	385 x 182 x 152 (15.2 x 7.0 x 6.0)	330 x 182 x 152 (13.0 x 7.0 x 6.0)	539 x 182 x 152 (21.2 x 7.2 x 6.0)
<b>Main Cable Entry Ports &amp; Size</b>	Oval ports: 1 for 2 express cables 8 - 20 mm (0.31 - 0.79 in.) O.D.	Round ports: 1 or 2 4-12 mm (0.15 - 0.47 in.) O.D.	Oval ports: 1 for 2 express cables 8 - 20 mm (0.31 - 0.79 in.) O.D.
<b>No. of Drop Terminations</b>	Up to 8	Up to 8	Up to 8
<b>Drop Cable Size &amp; Shape</b>	Round drop: 4-12 mm (0.15 - 0.47 in.) Flat drop: 8.5 x 4.3 mm (0.33 x 0.17 in.)	Round drop: 4-12 mm (0.15 - 0.47 in.) Flat drop: 8.5 x 4.3 mm (0.33 x 0.17 in.)	Round drop: 4-12 mm (0.15 - 0.47 in.) Flat drop: 8.5 x 4.3 mm (0.33 x 0.17 in.)
<b>Drop Installation</b>	12 mm ECAM cable entry port with rubber grommet and O-ring	12 mm ECAM cable entry port with rubber grommet and O-ring	12 mm ECAM cable entry port with rubber grommet and O-ring
<b>Maximum Number of Splice Trays</b>	Single: 4* Ribbon: 4*	Single: 4* Ribbon: 4*	Single: 4* Ribbon: 4*
<b>Branch Splice Capacity</b>	Single: 36 Mass: 108	Single: 36 Mass: 108	Single: 72 Mass: 216
<b>Grounding</b>	No. of feed-thru ground studs: 1 Additional grounding hardware to be purchased separately	No. of feed-thru ground studs: 1 Additional grounding hardware to be purchased separately	No. of feed-thru ground studs: 1 Additional grounding hardware to be purchased separately
<b>Flash Test</b>	5.8 PSI max	5.8 PSI max	5.8 PSI max

\*One splice tray is dedicated for drop splices.

## 3M™ Fiber Dome Terminal Closure FDTC 08M Direct Splice Drop Termination

### Branch Splice Capacity

Model #	Description	Splices Accommodated	Splice Capacity per Tray	Max No. of trays	Max No. Splice Capacity
2540-12-SF	Hinged splice tray, fiber entry/exit at top of the tray	Single fusion (45 mm)	12	3	36
		Single mechanical (3M™ Fibrlok™ Splice)	6	3	18
		Mass fusion	36	3	108



3M™ Fiber Optic Splice Tray 2540-12-SF/72-MF

## 3M™ Fiber Dome Terminal Closure FDTC 08S Direct Splice Drop Termination

### Branch Splice Capacity

Model #	Description	Splices Accommodated	Splice Capacity per Tray	Max No. of trays	Max No. Splice Capacity
2538-24-SF/72-MF	Stackable splice tray, fiber entry/exit at any corner of the tray	Single fusion (45 or 60 mm)	24	3	72
		Single mechanical (3M™ Fibrlok™ Splice)	12	3	36
		Mass fusion	72	3	216



3M™ Fiber Optic Splice Tray 2538

## 3M™ Fiber Dome Terminal Closure FDTC 08M and FDTC 08S Direct Splice Drop Termination

### Ordering Information

Product Number	Product Description	3M ID	Minimum Order
FDTC-08S-E-00N-01A-A-DS	Fiber dome terminal closure FDTC 08S w/ one 20 mm double cable port, eight 12 mm ECAM drop ports, one 2538 tray, one ground stud	80-6113-3479-0	1
FDTC-08M-E-00N-00N-A-DS	Fiber dome terminal closure FDTC 08M w/ one 20 mm double cable port, eight 12 mm ECAM drop ports, no tray, one ground stud	80-6113-3342-0	1
FDTC-08M-E-00N-01C-A-DS	Fiber dome terminal closure FDTC 08M w/ one 20 mm double cable port, eight 12 mm ECAM drop ports, one 2540 tray, one ground stud	80-6113-8025-6	1
FDTC-08ME-F-00N-01C-A-DS	Fiber dome terminal closure FDTC 08ME w/ one 12 mm main cable port, eight 12 mm ECAM drop ports, one 2540 tray, one ground stud, endspan application	80-6113-3626-6	1

# 3M™ Fiber Dome Terminal Closure - FDTC 08 Configuration Guide

Model Number                      FDTC                      XXX - X - XXX - XX    X - X - XX - X

FIBER DOME SIZE	
<b>08M</b>	15.2" x 7.2" x 6.0" (385.0mm x 182.0mm x 151.0mm); midspan application
<b>08S</b>	21.2" x 7.2" x 6.0" (539.0mm x 182.0mm x 151.0mm); midspan application
<b>08ME</b>	13.0" x 7.2" x 6.0" (330.0mm x 182.0mm x 151.0mm); end of span application
<b>10SE</b>	19.3" x 10.1" (485.0mm x 255.0mm); end of span application

Base Port Configuration	
<b>B</b>	6 - External Adaptor (HFOC) ports, 2-12mm branch cable ports, 20mm double cable port/kit; midspan
<b>C</b>	8 - External Adaptor (HFOC) ports, 20mm double cable port/kit; midspan
<b>E</b>	8 - 12mm ECAM ports, 20mm double cable port/kit; midspan
<b>F</b>	10 - 12mm ECAM ports with one ECAM-12MM kit; end of span
<b>G</b>	1 - 12mm ECAM port, 2 - 18mm ECAM ports, 27mm double cable port/kit; midspan
<b>H</b>	6 - External Adaptor (HFOC) ports, 2 - 12mm branch cable ports, 12mm cable port/kit; end of span
<b>J</b>	8 - External Adaptor (HFOC) ports, 12mm cable port/kit; end of span
<b>K</b>	7 - 18mm ECAM ports with one ECAM-18MM kit; end of span

ECAM Drop Kits	
<b>00-08</b>	# of ECAM kits
Type of ECAM Drop Kit	
<b>N</b>	None
<b>F</b>	ECAM-12MM-FLAT-US for flat drop cables; (25 lb pullout)
<b>R</b>	ECAM-12MM-RND-5/8MM for 5 to 8mm round drop cables; (> 25 lb pullout)
<b>U</b>	ECAM-12MM Universal for round or flat drop cables; (> 25 lb pullout)
<b>M</b>	ECAM-12MM-MF for Miniflex conduit

Splice Trays	
<b>0-6</b>	# of splice trays; see terminal closures specs for type of tray and maximum # of trays.
Type of Splice Tray	
<b>N</b>	None
<b>A</b>	2538-24-SF/72-MF; accommodates 12 2529 3M Fibrlok™ Splices, 24 single or 72 mass fusion splices (for FDTC 08S)
<b>B</b>	2539-12-SF; accommodates 12 single fusion splices (for FDTC 08S, 08M, & 08ME)
<b>C</b>	2540-12-SF/36-MF; accommodates 12 single or 36 mass fusion splices (for FDTC 08S, 08M, & 08ME)

Ground Legs	
<b>N</b>	None
<b>A</b>	1 GND Lug
<b>B</b>	2 GND Lugs (for FDTC-08S-G only)

Splitters (Qty, Type, Input/Output Fibers)	
<b>A</b>	1, 1x4 PLC, Input Spliced/Output Connectorized
<b>B</b>	1, 1x4 PLC, 250µm Input/Output Fibers
<b>C</b>	1, 1x8 PLC, Input Spliced/Output Connectorized
<b>D</b>	1, 1x8 PLC, 250µm Input/Output Fibers
<b>E</b>	1, 1x16 PLC, Input Spliced/Output Connectorized
<b>F</b>	1, 1x16 PLC, 250µm Input/Output Fibers

Connector Type	
<b>NN</b>	None
<b>EP</b>	SC/APC, single mode
<b>DW</b>	LC/APC single mode
<b>DA</b>	SC/UPC single mode
<b>DV</b>	LC/UPC single mode

External Adapter	
<b>N</b>	None
<b>A</b>	External SC Adapter (HFOC)

Fiber Pigtail Style	
<b>N</b>	Not Applicable
<b>A</b>	900µm tight buffer tube, 1 meter
<b>B</b>	3mm yellow jacketed cable, 1 meter
<b>C</b>	250µm ribbon to 900µm fanout, 3 meters

Connectors	
<b>0 to 16</b>	# of connectors

Direct Spliced Applications	
<b>DS</b>	Direct Spliced Drop Termination

## 3M™ Fiber Dome Terminal Closures FDTC 08M and FDTC 08S Direct Splice Drop Termination Accessories

Product Number	Product Description	3M ID	Minimum Order
2170	Fiber Optic Splice Sleeve	80-6102-8138-0	50
2171	Fiber Optic Splice Sleeve	80-6111-4669-9	50
4460-D	3M™ Scotchlok™ Shield Bond connector	80-6104-1486-6	100
4460-D/FO	3M™ Scotchlok™ Shield Bond connector assembly	80-6108-4444-3	100
2538-24-SF/72-MF	Fiber Splice Organizer 2538, 24 Single or 72 Mass Fusion Splices, Stackable	80-6113-1714-2	2
2539-12-SF	Fiber Splice Organizer 2539, 12 Single Fusion Splices, Hinged	80-6113-1715-9	2
2540-12-SF/36-MF	Fiber Splice Organizer 2540, 12 Single Fusion or 36 Mass Fusion Splices, Hinged	80-6113-1716-7	2
ECAM-12MM	12 mm ECAM Single Cable Entry Port	80-6130-1696-1	4
ECAM-12MM-MF-US	12 mm ECAM Single Cable Entry Port for Miniflex Duct 8 mm	80-6113-3621-7	8
ECAM-12MM-FLAT-US	12 mm ECAM Single Cable Entry Port for 1 or 2 Flat Cables	80-6113-2649-9	8
ECAM-12MM-RND-5/8MM12MM	12 mm ECAM Single Cable Entry Port for 5 to 8 mm Round Drop	80-6113-2990-7	8
ECAM-20MM-D	20 mm ECAM Double Cable Entry Port	80-6113-1697-9	1
ECAM-GND-6-AWG	ECAM (18 mm, 20 mm, 27 mm) Cable Ground (6 AWG)	80-6113-1702-7	2
ECAM-GND-14-AWG	ECAM Cable Ground (14 AWG)	80-6113-1704-3	2
FD-08-HH-1730	3M™ FD 08S Handhole Mounting Bracket for 17"x 30" Channell & Strongwell	80-6113-1706-8	2
FDT-08-PED-CH	3M™ FD 08S Pedestal Mounting Bracket for 10" Channell Pedestal	80-6113-1720-9	2
FDT-08-PED-CI	3M™ FD 08S Pedestal Mounting Bracket for Charles Industries 8" Pedestal	80-6113-1721-7	2
FD-08-AERIAL-SHB	3M™ FD 08S Aerial Stand Mount Hanger Bracket	80-6113-1707-6	2
FDST/FDT-08M-AERIAL-SHB	Aerial strand mount hanger bracket for FDST08 & FDT08M	80-6113-3206-7	3
FDST/FDT-08-POLE/PED-HB	Pole mount, wall mount, BD4, BD5, Channel, MAH100 pedestal mount bracket for FDST08, FDT08M & FDT08S	80-6113-3205-9	3

3M, Fibrolk and Scotchlok are trademarks of 3M. All other trademarks used herein are the properties of their respective owners.

### Important Notice

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.

#### Warranty; Limited Remedy; Limited Liability.

This product will be free from defects in material and manufacture for a period of 12 months from the time of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any loss or damage arising from this 3M product, whether indirect, special, incidental or consequential regardless of the legal theory asserted.**



#### Communication Markets Division

6801 River Place Blvd.  
Austin, TX 78726-9000  
800/426 8688  
Fax 800/626 0329  
www.3M.com/Telecom

Please recycle. Printed in USA.  
© 3M 2010. All rights reserved.  
80-6113-8336-7