

3M

Splicing Tape


97055

Information Sheet

Product Description

3M™ Splicing Tape 97055 is a blue double coated tissue tape coated on both sides with a versatile acrylic pressure sensitive adhesive (PSA). A conformable effective splicing tape specifically designed for uneven surfaces and demanding bonding applications, 3M tape 97055 provides an excellent bond on paper, plastics, and other film materials.

Product Construction

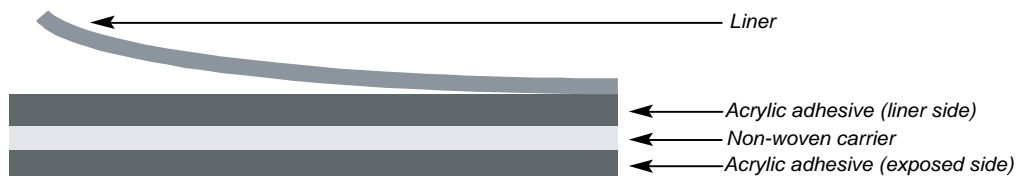

Features & Benefits

- Conformable and versatile splicing tape used in the manufacture of paper, plastics and other continuous web processes
- Excellent UV and temperature resistance
- Durability under stress
- High peel and tack
- Excellent performance at high and low temperatures

Typical Physical Properties

Test	Typical Value	Typical Value (Metric)
Product Thickness (Total)	4.3 mils	109.2 microns
Thickness (Exposed Adhesive)	1.5 mils	38.1 microns
Thickness (Carrier)	1.3 mils	33.0 microns
Thickness (Liner Adhesive)	1.5 mils	38.1 microns
Thickness (Liner)	3.3 mils	83.8 microns

If technical data is required, please contact your 3M sales professional or customer service representative to enter a technical service request for the specific data needed.

3M™ Splicing Tape

97055

Technical Information

The technical information, recommendations and other statements contained in this document are based upon tests or experience that 3M believes are reliable, but the accuracy or completeness of such information is not guaranteed.

(This product was formerly branded as Venture Tape 526)

Product Use

Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, user is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application.

Warranty, Limited Remedy, and Disclaimer

Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

Limitation of Liability

Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.

ISO 9001:2008

This Industrial Adhesives and Tapes Division product was manufactured under a 3M quality system registered to ISO 9001:2008 standards.



Industrial Adhesives and Tapes Division Converter Markets

3M Center, Building 225-3S-06
St. Paul, MN 55144-1000
800-223-7427 • 651-778-4244 (fax)
www.3M.com/converter



Recycled Paper
40% pre-consumer
10% post-consumer

3M is a trademark of 3M Company.
Printed in U.S.A.
©3M 2011 (11/11)