

# 3M™ EPX™ Manual Applicator for 200/250 mL Duo-Paks

See instructions below for conversions of 200 mL 1:1, 2:1 and 250 mL 10:1.  
See reverse side of sheet for conversions of 400 mL Duo-Paks.

## Instructions for Removing Push Disks


- 1) Place applicator with knob on floor.
- 2) Put both thumbs on front plate and fingers behind the disk you desire to remove.
- 3) Move fingers forward toward thumbs until disk snaps off rod. If the disk is hard to remove, use a rubber mallet and gently tap until disk becomes loose.
- 4) See **Disk Assembly Diagram** for proper ratio alignment.

## Instructions for Attaching Push Disks


- 1) Put socket of disk over rod shaft.
- 2) Push firmly onto the rod shaft until disk snaps in place. There should be two snapping sounds which will ensure the disks are firmly attached. Some twisting of the disk may be required to achieve the second snap.
- 3) Disks should be snapped fully into position so that their surface are aligned. This will ensure proper mixing of materials.

## DISK ASSEMBLY DIAGRAM

**IMPORTANT:** Disks must be on the correct side of the drive rod. If you are facing the outside of the front plate (see diagram), the disks under “L” should be on the left hand side and the disks under “R” should be on the right hand side of the drive rod.



FRONT PLATE DIAGRAM  
(Not to scale)

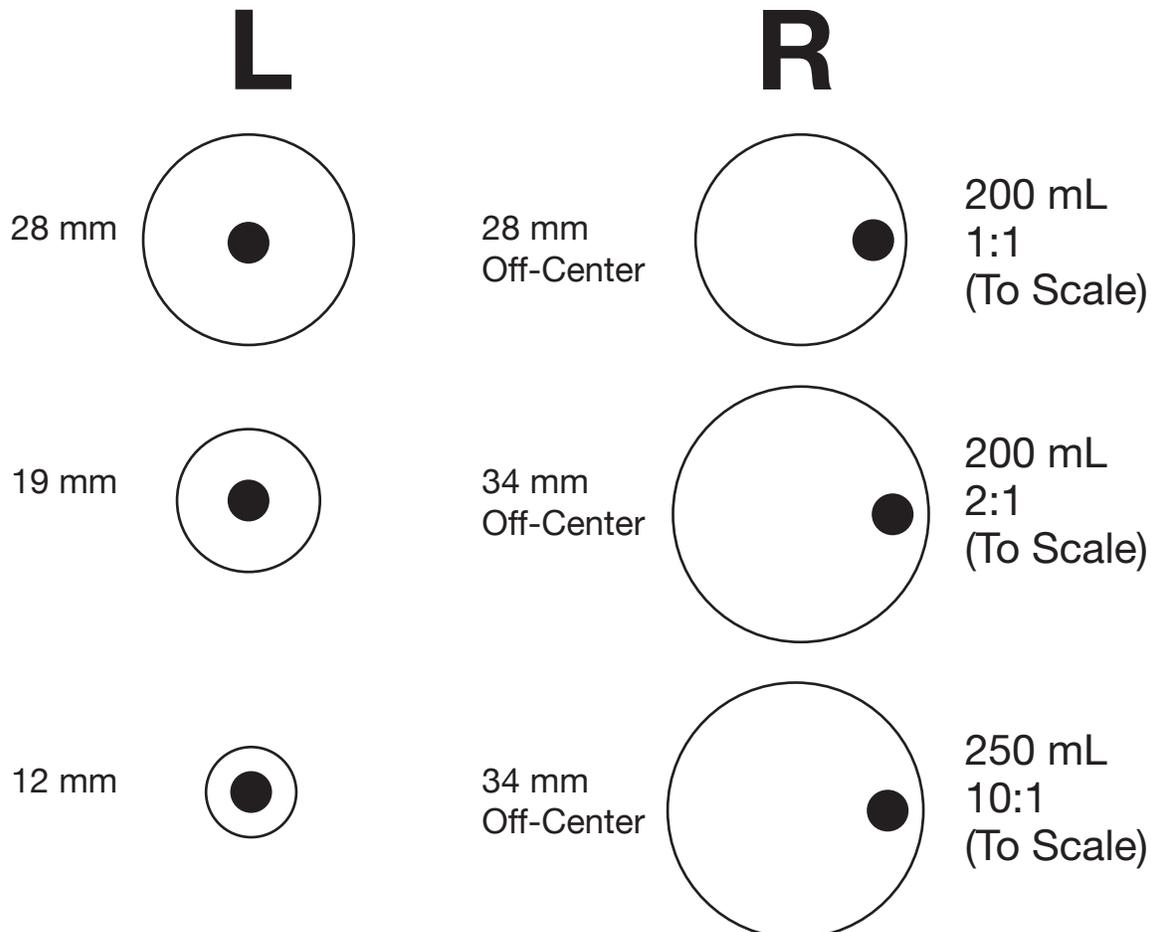

# 3M™ EPX™ Manual Applicator for 400 mL Duo-Paks

Applicator comes assembled ready for 1:1 ratio use with 400 mL Duo-Paks.

See instructions below for conversions of 400 mL 1:1, 2:1.

See reverse side of sheet for conversions of 200/250 mL Duo-Paks.

## Instructions for Removing Push Disks


- 1) Place applicator with knob on floor.
- 2) Put both thumbs on front plate and fingers behind the disk you desire to remove.
- 3) Move fingers forward toward thumbs until disk snaps off rod. If the disk is hard to remove, use a rubber mallet and gently tap until disk becomes loose.
- 4) See **Disk Assembly Diagram** for proper ratio alignment.

## Instructions for Attaching Push Disks


- 1) Put socket of disk over rod shaft.
- 2) Push firmly onto the rod shaft until disk snaps in place. There should be two snapping sounds which will ensure the disks are firmly attached. Some twisting of the disk may be required to achieve the second snap.
- 3) Disks should be snapped fully into position so that their surfaces are aligned. This will ensure proper mixing of materials.

## DISK ASSEMBLY DIAGRAM

**IMPORTANT:** Disks must be on the correct side of the drive rod. If you are facing the outside of the front plate (see diagram), the disks under “L” should be on the left hand side and the disks under “R” should be on the right hand side of the drive rod.



FRONT PLATE DIAGRAM  
(Not to scale)

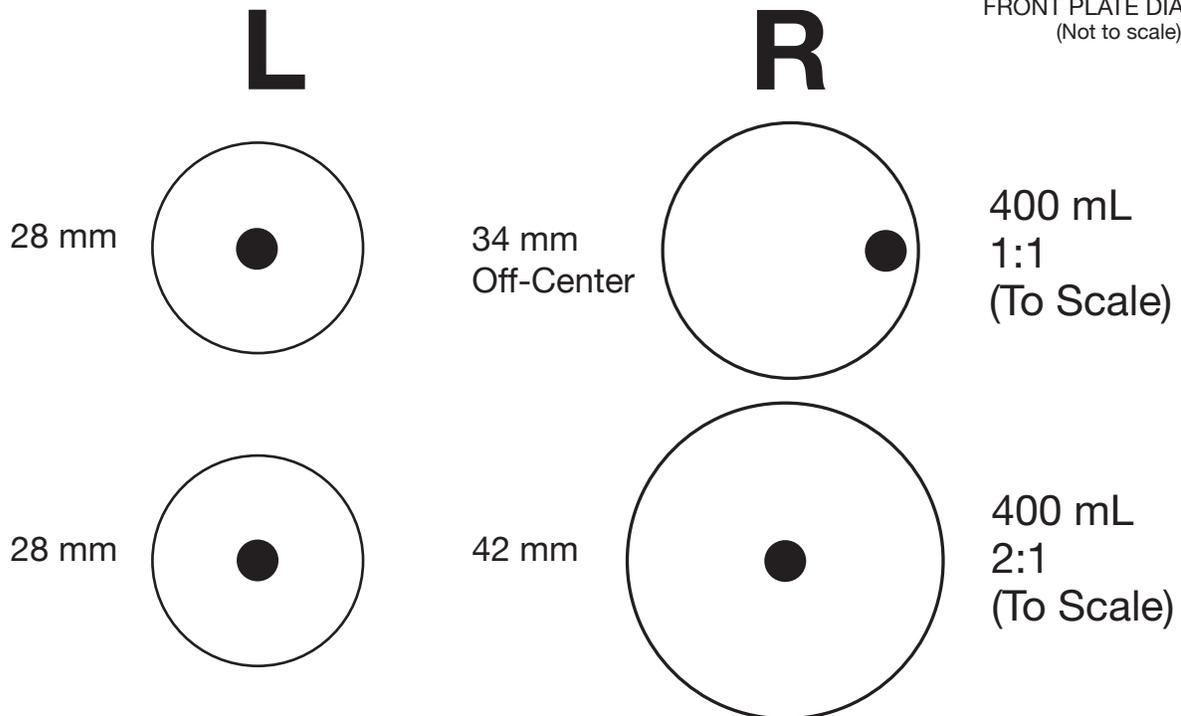

**Warranty and Limited Remedy:** 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER EXPRESS OR IMPLIED WARRANTIES OR CONDITIONS, INCLUDING ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. If the 3M product does not conform to this warranty, the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price. **Limitation of Liability:** Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted.



advanced web

**Proof Approval**

The above artwork was created as part of the 3M Label Implementation Center program. During it's creation, every effort was made by LIC to ensure that this artwork satisfies all of the requirements put forth by 3M regarding artwork creation. This proof has been submitted for your approval.

**Please Examine It Carefully**

This is a contract proof and by signing it you assume responsibility for the correctness of the following:

- Typeface, Size, and Style
- Spelling and Grammar
- Graphic Dimensions and Proportions
- Color Breaks
- Copy/Positioning

Label Implementation Center  
Bldg. 216-2N-08

FAX: (651) 733-3017 • Phone: (651) 736-3046

**ALTERATIONS  
REQUIRED**

Please mark any Revisions on this proof and submit to the Graphics Design studio for rework. All must be reproofed and resubmitted for approval.

**OK AS IS**

**X** \_\_\_\_\_

**By my signature I assume full responsibility for the correctness of this artwork.**

**If barcode does not meet the needs of the printing process or equipment to be used *the printer is responsible* to recreate the file using the appropriate bar width adjustment while meeting 3M quality requirements**

**Requester Name: Lavora Frazier/A.Suiter**

**Spec #: 34870692380**

**Catalog #: EPX flyer 2-sided**

**Size/Structure: 8.5x11”**

**Colors:** **K**

**Match  
Colors:**

**Designer: John Harazin**

**Dates: 6/14/11**

**AW#: 116370**

***Dieline Does Not Print***