


## Quick Links

[Facilities Website](#)

[Safety Data Sheets \(SDS\)](#)

Some of these links lead to web-based resources that are not product-specific.

A variety of different methods and standards are used to describe the aggressiveness of commercial abrasives. Different standards are used for coated abrasives (sand papers) and bonded abrasives (grinding wheels and diamond floor polishing abrasives) as well as specific standards for some specialty abrasive particles like diamond. All of the standards use size as an indication of how aggressive the abrasive particle will be..

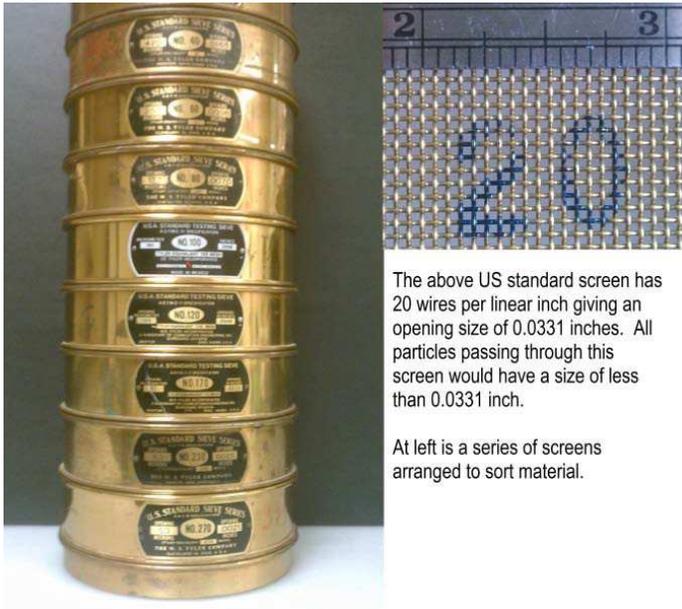

The above US standard screen has 20 wires per linear inch giving an opening size of 0.0331 inches. All particles passing through this screen would have a size of less than 0.0331 inch.

At left is a series of screens arranged to sort material.

## Where "Grit" comes from:

Before examining grit we need to understand some fundamentals of particle size grading. Historically a sequential series of screens was used to sort particle sizes. Each of these screens has a differing number of wires and openings per inch. As material passes through one screen and is retained on another we can sort them into size categories. ANSI B74.12 defines the size distribution of particles allowed to be contained in a certain "grit" of abrasive. Grit is therefore not a designation of specific particle size, but a description of a specific distribution of particle sizes.

## A Closer Look at "Grit":

Conventional designation of abrasives by "grit" results in a wide particle size distribution for each grit. For example ANSI B74.12 specifies that to be considered a 100 grit abrasive all the material must pass through a standard 70 screen with a maximum of 20% of the material being retained on a standard 100 screen. This means that up to 20 percent of the material is larger (more coarse) than the standard 100 screen opening while, at least 80% is smaller (finer) than the standard 100 screen opening.

This wide distribution of particle size means that scratch patterns will be inconsistent, with larger particles leaving deeper scratches and finer particles leaving shallow scratches. This varied scratch pattern must be able to be removed by the next abrasive used. This has led to the convention in the stone polishing world that you should never more than double the grit of the previous step when moving on to the next. For example, if we began honing the floor with a 60 grit abrasive, a sample progression would be; 60, 120, 220, 400, 800, 1500, and 3500 abrasive steps.

## A better way to think about abrasives:

The most important two factors to consider in an abrasive are the amount of work that will be performed (aggressiveness) and the resulting surface profile (scratch pattern). Surface profiles can be described by a few simple measurements:  $R_a$  = Average scratch depth,  $R_z$  = A measure of the uniformity of the scratches, and  $R_{max}$  = The depth of the deepest scratch.



The scratch pattern above is inconsistent and will have an  $R_z$ , and  $R_{max}$  greater than the scratch pattern shown below.



The more consistent a scratch pattern is after abrading a surface; the easier it is to further refine the surface, allowing for fewer steps to reach the desired outcome.

## How does this affect the use of 3M™ Trizact™ Diamond TZ Abrasive Pads?

3M™ Trizact™ Diamond TZ Abrasive Pads are not graded using conventional grit designations. Due to proprietary technologies and manufacturing techniques, Trizact™ abrasives leave very consistent scratch patterns, allowing for maximum efficiency and a reduced number of required steps in the abrasive process. Each 3M™ Trizact™ Diamond TZ Abrasive Pads is able to replace multiple conventional grit designated abrasives. The following chart outlines the conventional abrasives replaced by the use of Trizact pads. Trizact pads are able to do the work of the larger grit listed while leaving a surface profile similar to the finest grit listed

Traditional Diamond Discs	3M™ Trizact™ Diamond TZ Abrasive Pads
ANSI 60, 80, 100 Grit	3M™ Trizact™ Diamond TZ Abrasive Pads Gold
ANSI 100, 120, 180, 220, 240, 320, 400 Grit	3M™ Trizact™ Diamond TZ Abrasive Pads Red
ANSI 400, 600, 1000, 1200 Grit	3M™ Trizact™ Diamond TZ Abrasive Pads Blue

## Health and Safety

### CAUTION

When handling any chemical products, read the manufacturers' container labels and the Safety Data Sheets (SDS) for important health, safety and environmental information. To obtain SDS sheets for 3M products go to [3M.com/SDS](http://3M.com/SDS), or by mail or in case of an emergency, call 1-888-364-3577 or 1-651-737-6501.

When using any equipment, always follow the manufacturers' instructions for safe operation.

## Technical Information

Technical information and data, recommendations, and other statements provided by 3M are based on information, tests, or experience which 3M believes to be reliable, but the accuracy or completeness of such information is not guaranteed. Such technical information and data are intended for persons with knowledge and technical skills sufficient to assess and apply their own informed judgment to the information. The typical values shown should not be used for the purpose of specification limits. If you have questions about this Product, contact the **Customer Service Department at 1-800-852-9722**.

## Product Use

Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, user is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application.

## Warranty

3M warrants that each 3M product will be free from defects in material and manufacture for 90 days from the date of purchase from 3M's authorized distributor. 3M MAKES NO OTHER EXPRESS OR IMPLIED WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

### Limited Remedy

If a 3M product does not conform to this warranty, the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

### No Extension of Warranty

In the case of an approved warranty claim, the replacement Product will carry only the remaining term of the original warranty period.

### Limitation of Liability

Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted.

### Commercial Solutions

3M Center, Building 220-12E-04  
St. Paul, MN 55144

1-800-852-9722  
[3M.com/Facilities](http://3M.com/Facilities)

© 3M 2020. All rights reserved.  
3M and Trizact are trademarks of 3M.  
Used under license in Canada.  
All other trademarks are property of their respective owners.  
Revision B, March 2020 Please recycle.

**3M** Science.  
Applied to Life.™