

3M™ Novec™ 774 Engineered Fluid

Introduction

3M™ Novec™ 774 Engineered Fluid is a clear, colorless and low odor fluid, and is one in a line of 3M products designed as replacements for ozone depleting substances (ODSs) and compounds with high global warming potentials (GWPs).

Novec 774 fluid is an advanced heat transfer fluid, balancing customer needs for physical, thermal and electrical properties, with sustainable environmental properties, minimizing the environmental footprint left behind.

Typical Applications

Novec 774 fluid is an effective heat transfer fluid with a boiling point of 74°C. Novec 774 fluid is useful in heat transfer applications, particularly where non-flammability or environmental factors are a consideration.

Examples of systems which benefit from using Novec 774 fluid include:

- Electronics cooling (single or dual phase)
 - Power electronics such as IGBTs or inverters
 - Transformers and other equipment
- Computer/data center cooling
- Electronics testing, pressure compensation, other heat transfer applications
- Organic Rankine Cycle
 - Diesel engines
 - Solar applications

Properties Description

Composition of Novec 774 fluid	
Tetradecafluoro-2-methylhexan-3-one Tetradecafluoro-2,4-dimethylpentan-3-one	99.0 mole %, minimum (two isomers)
Chemical Formulas	$(CF_3)_2CFC(O)CF(CF_3)_2$ $CF_3CF_2CF_2C(O)CF(CF_3)_2$


Typical Physical Properties

	Unit	Novec 774
Boiling Point	°C	74
Pour Point	°C	-78
Molecular Weight	g/mol	366
Critical Temperature	°C	195
Critical Pressure	MPa	1.71
Vapor Pressure	kPa	15.7
Heat of Vaporization	kJ/kg	90
Liquid Density @ 25°C	kg/m ³	1660
Coefficient of Expansion	K ⁻¹	0.0015
Kinematic Viscosity	cSt	0.52
Absolute Viscosity	cP	0.87
Specific Heat	J/kg-K	1130
Thermal Conductivity	W/m-K	~0.060
Surface Tension	mN/m	12.3
Solubility of Water in Fluid	ppm by wt	20
Dielectric Strength, 0.1" gap	kV	>40
Dielectric Constant @ 1kHz	-	1.9
Volume Resistivity	Ohm-cm	10 ¹²
Global Warming Potential	GWP	~1


Thermophysical Properties

Not for specification purposes.

Liquid Density (kg/m³) = 1730.5 - 2.692T(°C)

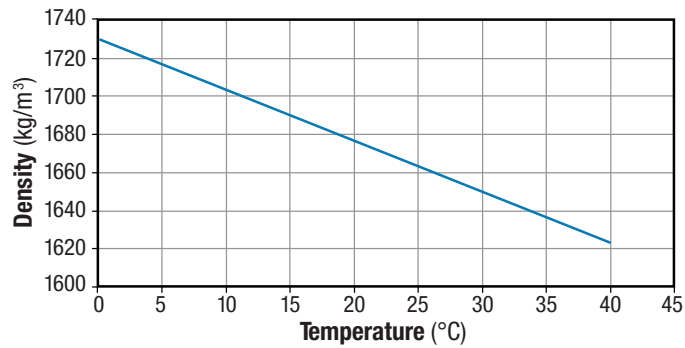


Estimated Liquid Thermal Conductivity (W/m-K) = 0.063 - 0.00012T(°C)

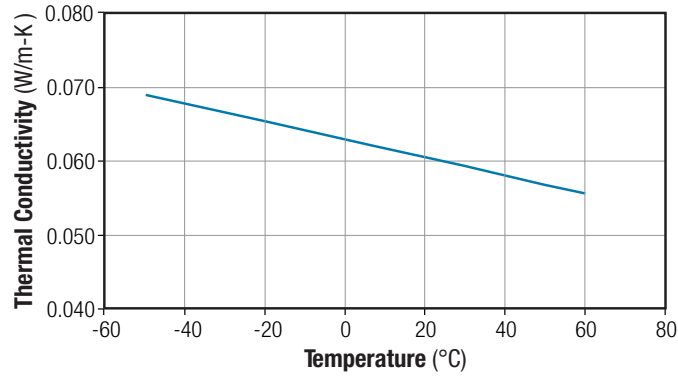

Liquid Specific Heat (J/kg-K) = 1098 + 1.75T(°C)

Vapor Pressure ln(P[Pa]) = -3959/T(K) + 22.938

Novec 774 Fluid Viscosity vs. Temperature

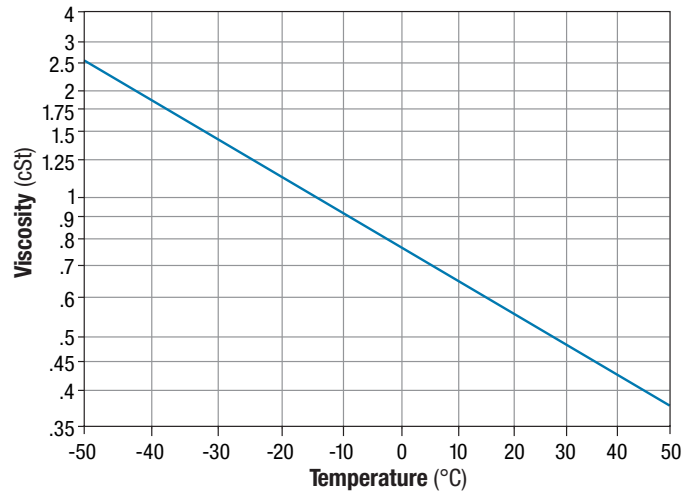

Features

The environmental profile, margin of safety, low viscosity, high molecular weight, low pour point and heat transfer performance of 3M™ Novec™ 774 Engineered Fluid make it an ideal candidate for a variety of heat transfer applications.

Novec 774 fluid is compatible with a wide range of materials of construction and requires no special piping or handling systems, and is very stable in storage. Its high dielectric strength makes it safe for direct contact in most electronics/computing applications.

Stability

Novec 774 fluid should be used in a sealed system to prevent interaction with water. Fluoroketones like Novec 774 fluid, though reactive with liquid water (i.e. a separate water phase), are remarkably stable in its absence to over 300°C. 3M's applications engineers are available to discuss system design and trade-offs for Novec 774 fluid vs. alternative heat transfer fluids or solutions.

Environmental, Health and Safety

Novec 774 fluid contains no chlorine or bromine and therefore does not affect stratospheric ozone. Fluoroketones, like Novec 774 fluid, are also known to degrade rapidly in natural sunlight. This photolysis process leads to very short atmospheric lifetimes for fluoroketones, on the order of a few days or weeks. The potential for Novec 774 fluid to impact the radiative balance in the atmosphere (i.e., climate change) is limited by this very short atmospheric lifetime. Using the Intergovernmental Panel on Climate Change (IPCC) 2007 calculation method the estimated global warming potential (100 yr. ITH) for Novec 774 fluid is 1. When used as substitutes for hydrofluorocarbons, perfluorocarbons, perfluoropolyethers, or hydrofluoropolyethers, fluoroketones can enable greater than a 99 % reduction in GHG emissions.

Toxicity Profile

3M carefully characterizes the toxicity of new materials early in the product development process. These early studies and the subsequent studies required for new chemical notification conducted by independent laboratories indicate that Novec 774 fluid is very low in both acute and repeat dose toxicity. A 1-hour acute inhalation study at 9% (90,000 ppmv) did not result in adverse effects. The No Observed Adverse Effect Level (NOAEL) in a 29-day repeated dose inhalation study (6 hr/day for 5 days per week) is 3000 ppmv. An 8-hour time weighed average (TWA) exposure guideline for Novec 774 fluid of 225 ppmv has been established by 3M with input from an independent third party consultant. In summary, Novec 774 is low in toxicity, is only minimally irritating to skin or eyes, is not a sensitizer and is not mutagenic. On this basis, foreseeable use of Novec 774 fluid under normal operating conditions results in a large margin of safety between anticipated exposure and the exposure guideline.

Recycle and Disposal Options

Used Fluid Return Program

3M offers a program for free pickup and return of used 3M specialty fluids in the U.S. A pre-negotiated handling agreement between users and our authorized service provider offers users broad protection against future liability for used 3M product. The fluid return program is covered by independent third-party financial and environmental audits of treatment, storage and disposal facilities. Necessary documentation is provided. A minimum of 30 gallons of used 3M specialty fluid is required for participation in this free program.

For additional information on the 3M Used Fluid Return Program, contact your local 3M representative or call 3M Customer Service at 800.810.8513.

Resources

3M™ Novec™ Engineered Fluids are supported by global sales, technical and customer service resources, with technical service laboratories in the U.S., Europe, Japan, Latin America and Southeast Asia. Users benefit from 3M's broad technology base and continuing attention to product development, performance, safety and environmental issues. For additional technical information on 3M™ Novec™ 774 Engineered Fluid in the United States, or for the name of a local authorized distributor, call 3M Electronics Materials Solutions Division: 800-810-8513.

The 3M™ Novec™ Brand Family

The Novec brand is the hallmark for a variety of proprietary 3M products. Although each has its own unique formula and performance properties, all Novec products are designed in common to address the need for safe, effective, sustainable solutions in industry-specific applications. These include precision and electronics cleaning, heat transfer, fire protection, protective coatings, immersion cooling, advanced insulation media replacement solutions and several specialty chemical applications.

3M™ Novec™ Engineered Fluids • 3M™ Novec™ Aerosol Cleaners • 3M™ Novec™ 1230 Fire Protection Fluid • 3M™ Novec™ Electronic Grade Coatings • 3M™ Novec™ Electronic Surfactants • 3M™ Novec™ Dielectric Fluids

United States	China	Europe	Japan	Korea	Singapore	Taiwan
3M Electronics Materials Solutions Division 800 810 8513	3M China Ltd. 86 21 6275 3535	3M Belgium N.V. 32 3 250 7521	Sumitomo 3M Limited 813 3709 8250	3M Korea Limited 82 2 3771 4114	3M Singapore Pte. Ltd. 65 64508888	3M Taiwan Limited 886 2 2704 9011

Regulatory: For regulatory information about this product, contact your 3M representative.

Technical Information: The technical information, recommendations and other statements contained in this document are based upon tests or experience that 3M believes are reliable, but the accuracy or completeness of such information is not guaranteed.

Product Use: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, user is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application.

Warranty, Limited Remedy, and Disclaimer: Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

Limitation of Liability: Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



Electronics Materials Solutions Division

3M Center, Building 224-3N-11
St. Paul, MN 55144-1000
www.3M.com/novec
1-800-810-8513

Please recycle.
© 3M 2014. All rights reserved.
Issued: 7/14 10089HB
60-5002-0552-5

3M and Novec are trademarks of 3M Company.
Used under license by 3M subsidiaries and affiliates.