




3M™ Surface Pre-treatment AC-130

Description


3M™ Surface Pre-treatment AC-130 is a high-performance sol-gel surface preparation for adhesive bonding of aluminum alloys, steel, titanium and composites. 3M AC-130 promotes enhanced adhesion as a result of the chemical interaction at the interfaces between the metal, the AC-130 and the primer.

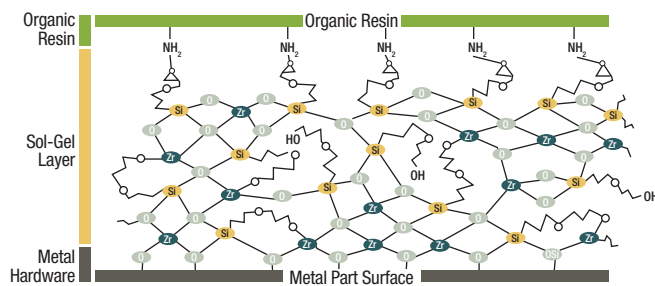

Product Benefits


- Enables all metallic substances to be prepared with a single method.
- Reduces hazardous materials from the bonding surface preparation process.
 - Environmentally alternative to Acid Paste.
 - Etches, Grit Blast Silane and Phosphoric Acid anodizing. (PACS)
- Available in 4-part (AC-130) and 2-part (AC-130-2) configurations.
- Provides a variety of applications methods to suit your needs: brush, spray, dip or wipe.
- Available in kit sizes for specific applications; 50ml, 100ml, 500ml and 1 liter.
- Ambient-temperature curing makes field repairs possible.
- Process time savings over Grit Blast Silane, PACS and PANTA.
- Reduction in process flow time yields a minimum of a 35% reduction in labor-time.

AC-130 Process

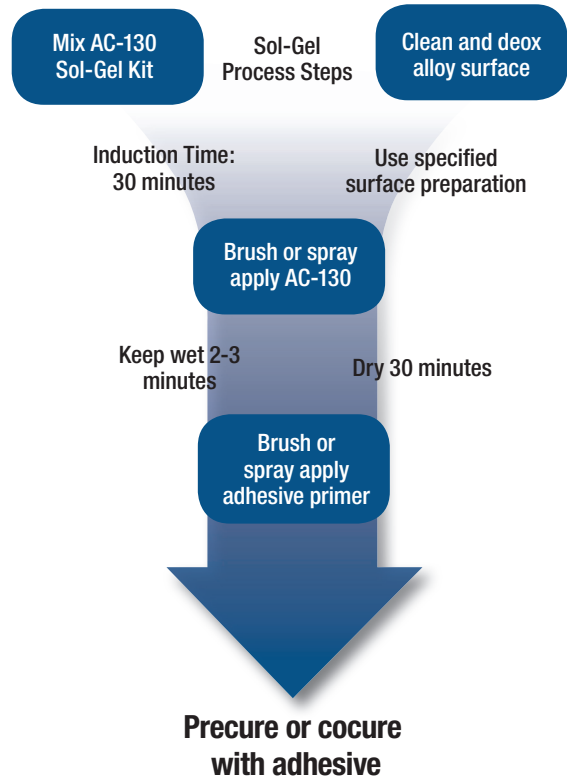


Surface Treatment Comparison


Aluminum Bonding 2024-T3 Wedge Crack Exposure Data

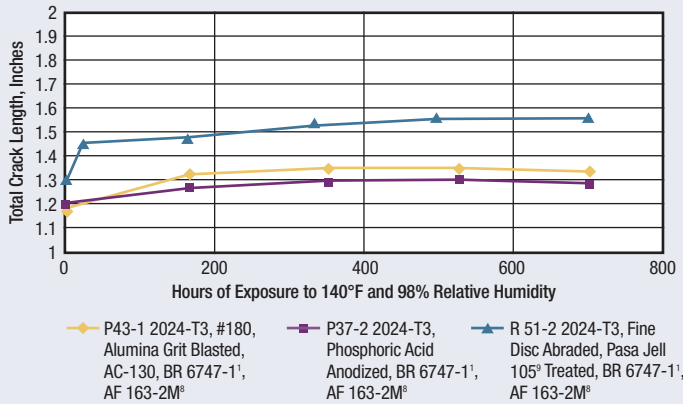

Titanium Bonding Ti-6Al-4V Wedge Crack Exposure Data

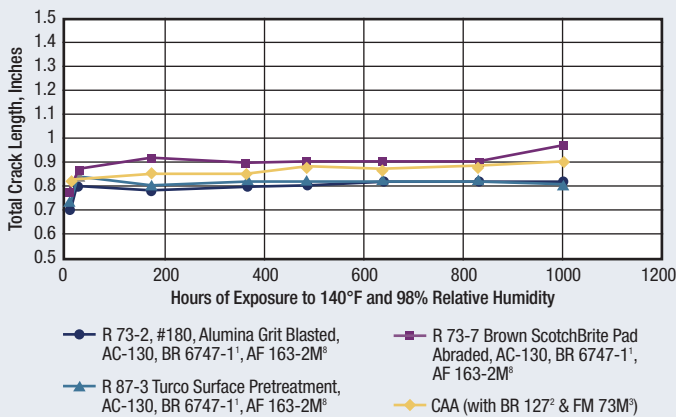

Steel Bonding AM355 Stainless Comparison of wedge crack extension

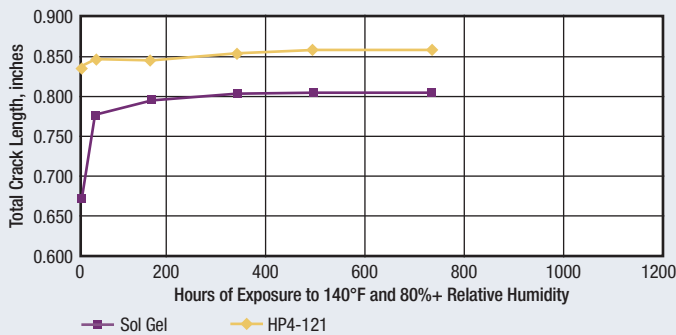

Note: Bonded with BR[®] 6747-1' primer and FM94⁴ adhesive
 Note: HP 4-121 is a ferric chloride (FCHAE) etch process

3M Stock Numbers & National Stock Numbers

Product	3M ID	NSN	Size	Packaging
3M Surface Pre-Treatment AC-130	70-0052-0010-3	6850-01-504-5763	500 ML KIT	10/CASE
3M Surface Pre-Treatment AC-130	70-0052-0006-1	6850-01-505-8844	100 ML KIT	10/CASE

- ¹BR[®] 6747-1 Water-based Adhesive Bonding Primer System
- ²BR[®] 127 Corrosion Inhibiting Primer
- ³FM[®] 73 Epoxy Film Adhesive
- ⁴FM[®] 94 Modified Epoxy Film
- ⁷Turco[®] Surface Pretreatment
- ⁸3M[™] Scotch-Weld[™] Structural Adhesive Film AF 163-2M
- ⁹Semco[®] Pasa-Jell 105

Product Use: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, user is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application.

Warranty, Limited Remedy, and Disclaimer: Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. **3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE.** If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

Limitation of Liability: Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



3M Aerospace and Aircraft Maintenance Division
 3M Center, Building 223-1N-14
 St. Paul, MN 55144-1000
 3M.com/aerospaceadhesives

3M and Scotch-Weld are trademarks of 3M. Semco is a trademark of PRC-DeSoto International, Inc., BR and FM are registered trademarks of Cytec Industries, Inc., Turco is a registered trademark of Henkel Corporation.

Please recycle.
 Printed in USA.
 © 3M 2012. All rights reserved.
 60-9700-0312-9