3M-Matic<sup>™</sup> Adjustable Case Sealer 7000a Pro



Today, companies need to be fast and flexible in every phase of their operations—and that includes end-of-line packaging. The 3M-Matic™ Adjustable Case Sealer 7000a Pro gives manufacturers and distributors from every industry the packaging flexibility and speed to stay one step ahead of the competition.

3M<sup>™</sup> AccuGlide<sup>™</sup> Taping Head Technology and tough, durable construction make sure your boxes are sealed swiftly and reliably, shift after shift, year after year. Plus, expanded box-size capacity and interchangeable 2-inch or 3-inch taping heads allow you to change as your business changes, boosting your productivity, cutting your costs and keeping your business nimble.

3M-Matic™ Case Sealers: Consistent. Reliable. Tough.



## Long lasting. Low maintenance. Trusted reliability.


## **Innovative Features**

- 3M<sup>™</sup> AccuGlide<sup>™</sup> 3 Taping Heads ensure reliable application of tape without box damage
- Auxiliary offset taping head position increases flexibility in sealing shorter boxes
- Interchangeable 2-inch or 3-inch taping heads maximize production flexibility
- Easily accessible side handle and reference ruler make height adjustments a snap for a wide variety of case heights from 2 inches to 36 inches
- Rugged, dual-extruded columns allow for smooth incremental adjustments to case heights
- Unified side guides adjust both sides at once for onehanded simplicity

## **Standard Features**

- Top and bottom drive belt system
- Top flap compression rollers
- Centrally located emergency stop
- Spring-loaded upper drive assembly
- Dual masts and dual lead screws

**Options:** Infeed and exit conveyors, locking casters, low tape indicator, light indicator, box hold-down attachment

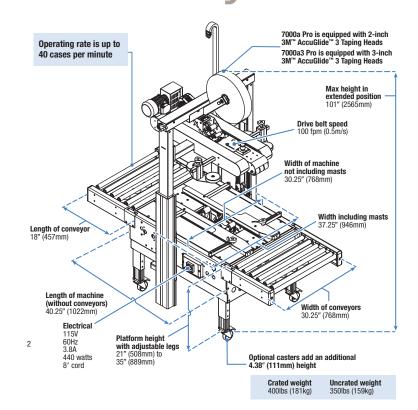

Box Dimensions for 7000a Pro and 7000a3 Pro Machines: Inches (mm)					
			Height <sup>1</sup>		
			Standard Position	Standard Position	Offset Position
	Length	Width	Standard Tape Leg Length	Short Tape Leg Length	Short Tape Leg Length
Minimum <sup>2</sup>	6 (152)	6.5 (165)	4.25 (108)	3.75 (95)	2.75 (70)
Maximum <sup>3</sup>	N/L	26 (660)	28 (711)	27.5 (700)	25.75 (654)

Requires a column adjustment for case heights lower than 4.25" or higher than 28"
 Minimum case height of 1.5" requires LHB taping heads in 1-3/8" tape leg position, 78 fpm belt speed.

Learn more about 3M's full line of case sealing solutions at 3M.com/3M-Matic

Product Use: User is responsible for determining whether the product is fit for a particular purpose and suitable for user's method of application.

Warranty and Limited Remedy: THE FOLLOWING WARRANTIES ARE MADE IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO THE IMPLIED WARRANTY OF MERCHANTABILITY, THE IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE AND ANY IMPLIED WARRANTY ARISING OUT OF A COURSE OF DEALING, A CUSTOM OR USAGE OF TRADE: SM sells its SM-Matic\* Adjustable Case Sealer 7000a Pro with the following warranties: 1) The Taping Head knife blades, springs and rollers will be free from all defects for ninety (90) days after delivery. 2) All other Taping Head parts will be free from all defects for hine from all defects for rinety (90) days after delivery. 2) All other Taping Head parts will be free from all defects for interviole and the part is proved to be defective within its warranty period, then the exclusive remedy and SM's and seller's sole obligation shall be, at SM's option, to repair or replace the part, provided the defective part is returned immediately to SM's factory or an authorized service station designated by 3M. A part will be presumed to have become defective after its warranty period unless the part is received or 3M is notified of the problem no later than five (5) calendar days after the warranty period. If SM is unable to repair or replace the part within a reasonable time, then 3M, at its option, will replace the equipment or refund the purchase price. 3M shall have no obligation to provide or pay for the labor required to install the repaired or replacement part. 3M shall have no obligation to repair or replace (1) those parts failing due to operator misuse, or parts alling due to operator misuse, indicated and shall allery or (2) parts failing due to one-lubrication, inadequate cleaning, improper operating environment, improper utilities or operator revor. Limitation of Liability: 3M and seller shall not be liabile for direct, indirect, s



Industrial Adhesives and Tapes Division

Building 225-3S-06 St. Paul, MN 55144-1000 1-800-362-3550 3M.com/3M-Matic

<sup>&</sup>lt;sup>3</sup> Maximum case height of 36" can be obtained by moving the columns and the upper assembly to the upper mast position. Minimum will be 12.25".