


Product Specification

3M™ Internal miniSAS HD to miniSAS 36P Hybrid Cable Assembly

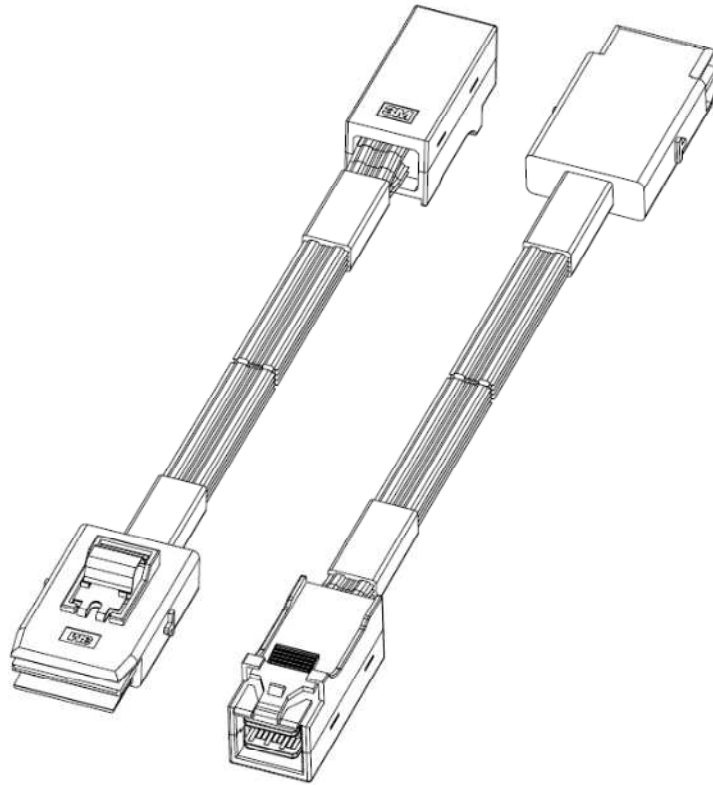

3M Electronic Solutions Division

6801 River Place Blvd.
Austin, TX 78726-9000
www.3Mconnectors.com



Table of Contents

<u>Section</u>	<u>Content</u>	<u>Page</u>
	Table of Contents	1
1.	Scope	2
1.1.	Content	2
2.	Reference Documents	2
2.1.	Commercial Standards, Specifications and Report	2
3.	Requirements	2
3.1.	Design and Construction	2
3.2.	Materials	2
3.3.	Ratings	3
3.4.	Performance and Test Description	3
3.5.	Test Requirements and Procedures Summary	3

1. SCOPE

1.1. Content

This specification covers performance, tests and quality requirements for the 3M Internal miniSAS HD to miniSAS 36P Hybrid Cable Assembly.

2. REFERENCE DOCUMENTS

The following documents are referred to form a part of this specification. Unless otherwise specified, latest edition of the reference documents applies. In the event of conflict between requirements of the references and 3M specification, 3M specification shall take precedence.

2.1. Commercial standards, specifications and report

- 2.1.1. EIA-364
- 2.1.2. SAS 2.1 and SAS 3.0
- 2.1.3. SFF-8643
- 2.1.4. SFF-8087

3. REQUIREMENTS

3.1. Design and Construction

Product shall be of design, construction and physical dimensions specified on applicable product drawing.

3.2. Materials

3.2.1. Internal miniSAS HD

- 3.2.1.1. Housing
 - Material : High Temperature Thermoplastic
 - Flammability : UL94V-0
- 3.2.1.2. Paddlecard
 - Material : FR4
 - Mating pad underplate : 1.27 μm (50 $\mu\text{''}$) Ni MIN
 - Mating pad finish : 0.76 μm (30 $\mu\text{''}$) Au MIN
- 3.2.1.3. High Speed Ribbon Twin Axial Cable
 - See related specification PS-0105 for ribbon 3M™ Twin Axial Ribbon Cable material information.

3.2.2. Internal miniSAS 36P

3.2.2.1. Housing

Material : High Temperature Thermoplastic
Flammability : UL94V-0

3.2.2.2. Paddlecard

Material : FR4
Mating pad underplate : 2.54 μm (100 $\mu\text{''}$) Ni MIN
Mating pad finish : 0.76 μm (30 $\mu\text{''}$) Au MIN

3.2.2.3. High Speed Ribbon Twin Axial Cable

See related specification PS-0079 for ribbon 3M™ Twin Axial Ribbon Cable material information.

3.3. Ratings

3.3.1. Current rating: 0.5 A/contact

3.3.2. Operating temperature: 0°C to +80°C

3.4. Performance and Test Description

Product is designed to meet electrical, mechanical and environmental performance requirements specified in section 3.5. All tests are performed at ambient environmental conditions per EIA-364 unless otherwise specified.

3.5. Test Requirements and Procedures Summary

Test Description	Test Condition	Requirement
Visual examination	Inspection of product for abnormality/defects.	No visual defects
Critical dimension measurement	Measure dimensions specified in applicable product drawing.	Product shall meet requirements of applicable product drawing.

Test Description	Test Condition	Requirement
ELECTRICAL		
Dielectric withstanding voltage	EIA-364-20, Method B Subject a voltage of 300 VDC for 1 minute at sea level between adjacent contacts of mated and unmated connector assemblies.	No defect or breakdown between adjacent contacts.
Insulation resistance	EIA-364-21 Subject a voltage of 100 VDC for 1 minute between adjacent contacts of mated and unmated connector assemblies.	1000 MΩ minimum between adjacent contacts.
MECHANICAL		
Mechanical shock	EIA-364-27	No damage. 20 mΩ maximum change from initial (baseline) contact resistance.
Durability	EIA-364-09 Perform 250 unplug/plug cycles.	No evidence of physical damage.
ENVIRONMENTAL		
Thermal shock	EIA-364-32, Method A, Test Condition I -55°C to +85°C, 10 cycles, 1/2 hour at each temperature extreme.	20 mΩ maximum change from initial (baseline) contact resistance.
Vibration	EIA-364-28, Test Condition VII, Test condition letter D 3.10G RMS between 20 and 500 Hz at 15 minutes in each of 3 mutually perpendicular directions.	No damage. No discontinuity longer than 1μsec allowed. 20 mΩ maximum change from initial (baseline) contact resistance.

For detailed electrical, mechanical and environmental test requirements and procedures, please refer the following documents:

- (i) Internal miniSAS HD : 78-5102-0147-4
- (ii) Internal miniSAS 36P : PS-0082

Unless otherwise noted, references to industry specifications are intended to indicate substantial compliance to the material elements of the specification. Such references should not be construed as a guarantee of compliance to all requirements in a given specification.

Halogen-free is defined as both (1) no halogen compounds are intentionally added to the product or used in the manufacturing process for the product, and (2) any impurities present are less than 900 ppm bromine, less than 900 ppm chlorine, and/or less than 1500 ppm total bromine and chlorine. The latter are the levels set forth in certain industry standards for printed circuit boards, such as the International Electrotechnical Commission (IEC) 61249-2-21 standard.

"RoHS 2011/65/EU" means that the product or part does not contain any of the substances in excess of the maximum concentration values ("MCVs") in EU RoHS Directive 2011/65/EU. The MCVs are by weight in homogeneous materials. This information represents 3M's knowledge and belief, which may be based in whole or in part on information provided by third party suppliers to 3M.

In the event any product is proven not to conform with 3M's Regulatory Information Appendix, then 3M's entire liability and Buyer's exclusive remedy will be in accordance with the Warranty stated below.

3M is a trademark of 3M Company.

Important Notice

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.

Warranty; Limited Remedy; Limited Liability.

This product will be free from defects in material and manufacture for a period of one year from the time of purchase. 3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.

