

# 3M™ LED advanced light PAR-30L



120~



2700K

3000K



## Features:

- Dimmable
- Multiple color temperatures available
- Proprietary CrimpFin™ Heatsink Design
- 50,000-hour life, 5-year warranty
- Halogen PAR form factor (ANSI compliant)
- No UV or IR radiation
- 0.9 power factor
- Voltage: 120 V
- Socket Type: medium screw base
- Environment: suitable for damp locations
- Length: 4.6 in, 117 cm
- Diameter: 3.75 in, 95 mm
- Weight: 7.05 oz, 200 g


Featuring advanced innovations and lighting technologies, the 3M™ LED advance light PAR-30L uses just 13 watts of power yet exceeds the light output of 75-watt PAR incandescent bulbs. These amazing, energy-efficient lights help you reduce energy usage while supplying bright, natural light. They're ideal replacement lights for retail, hospitality, furniture, museum and many other commercial applications.



Catalog #	Lumens	CCT (deg K)	Power (W)	Beam Angle	CRI	CBCP
<b>RCPAR30LB3</b>	820	3000	13	25°	82	3,525
<b>RCPAR30LB27</b>	760	2700	13	25°	82	3,268



# 3M™ LED advanced light PAR-30L

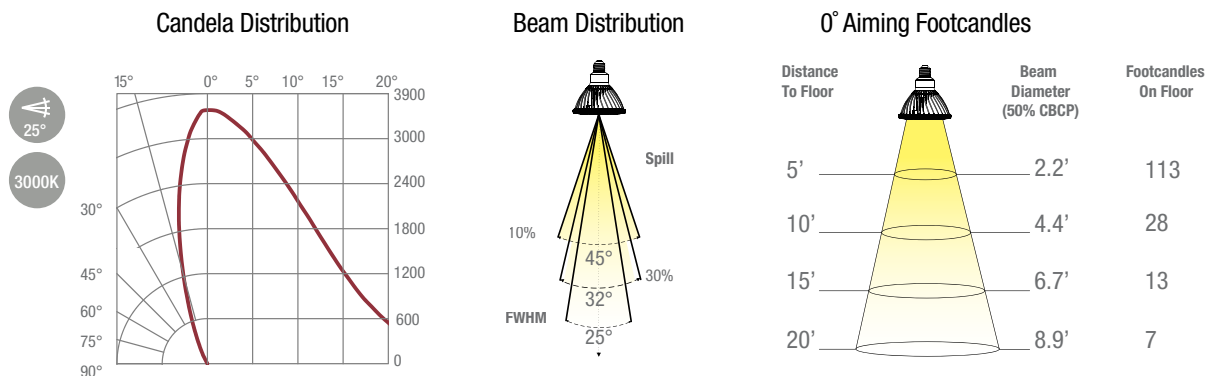

## Ordering Information

Catalog #	Description	Stock Number	Billing Unit	Case Qty.	MOQ	Item UPC	Case UPC	Case Dimension (L x W x H)	Case Weight (lbs.)	Case Cube (cu. ft.)
RCPAR30LB3	PAR-30 Long, 3000K, 25°, Dimmable	70-0800-3009-4	EA	16	1 case	000-51128-94399-1	500-51128-94399-6	17.1" x 8.6" x 9.5"	10	0.808
RCPAR30LB27	PAR-30 Long, 2700K, 25°, Dimmable	70-0800-3010-2	EA	16	1 case	000-51128-94400-4	500-51128-94400-9	17.1" x 8.6" x 9.5"	10	0.808

Halogen Free is defined as having less than 900 ppm bromine, less than 900 ppm chlorine, and less than 1500 ppm total bromine and chlorine; other halogens are excluded from this definition. These are levels set forth in certain industry standards, such as International Electrotechnical Commission (IEC) 61249-2-21 standard. This information is 3M's current knowledge and belief, which may be based in whole or in part on information provided by its suppliers.

3M is a trademark of 3M Company. All other trademarks herein are the property of their respective owners.

## Important Notice

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.

## Warranty; Limited Remedy; Limited Liability.

Warranted to last 5 years based on 12 hours normal use per day at 120 volts. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.**



## Electrical Markets Division

6801 River Place Blvd.  
Austin, TX 78726-9000  
800 245 3573  
FAX 800 245 0329  
www.3M.com/led

Please recycle. Printed in USA.  
© 3M 2013. All rights reserved.  
80-6016-0720-5